

ISSUE

4



Gas Guide

Helping you find
the right solution for
your **gas analysis**
application.

Analysis that **empowers**

SERVOMEX 
a **spectris** company

servomex.com



James Gravestock, Servomex President

Welcome to the latest issue of our Gas Guide. This new edition is a comprehensive handbook covering all aspects of gas analysis and our sensing solutions.

Inside, you'll find our complete range of products to help you create a cleaner, healthier, and more productive world, from analyzers and systems to our global service support.

Our products will enable you to act with precision, delivering performance that is optimized to the needs of your process. Our world-leading Hummingbird sensing technologies provide the measurements that enable you to make smarter decisions, while our sustainability-focused production processes help support your own environmental goals.

We've included a complete specifier's guide, to help you make a difference in your application by choosing the gas analysis system that will provide an accurate gas measurement, in the right range, with the correct certifications for your process environment.

There are also features on some key applications, looking at where gas analysis can best support efficiency, quality, and safety, delivering the most effective results.

Our expert team is here to help you, so get in touch if you want to find out more, or have any questions.

Issue 4 of our gas guide

Helping you find solutions that empower change in your process

How to use this guide

To make it easier to find what you're looking for, we've divided this comprehensive guide into several sections:

Specifier's guide to gas analysis The key criteria driving analyzer choice, plus flowcharts to find solutions for common gas measurements.	Key applications A selection of process and purity applications illustrating the role of our analytical systems.
A-Z of sensing technologies The advantages and disadvantages of each sensor type for your application.	Servomex product guide The complete range of Servomex analyzers.
Systems & Services Our customized systems builds and flexible service support packages.	Further resources Manuals, videos, and expert papers, ready to download or view online.

We want you to be certain you're making the right choice, so if you still need help our expert team is ready to assist you.

Get in touch: servomex.com/contact

Contents

Servomex - who we are	4
Sustainability and ethics	6-7
Specifier's guide to gas analysis	8-25
Range/purity	9
Gas measurement guide	10-11
Certifications	12
Oxygen guide	13-15
Environments	16
Methane guide	17-19
Type of supplier	20
CO ₂ /CO guide	21-25
Key applications	26-67
Purity & specialty applications	29-35
Industrial process & emissions applications	37-67
Hummingbird – performance in partnership	68-69
An A-Z of sensing technologies	70-97
Introducing the new Gen-7 DF-500 Range	98-100
Servomex Product Guide	101-133
SERVOTOUGH hazardous area products	102-110
SERVOPRO safe area products	111-127
SERVOFLEX portable products	128-131
Servomex gas analysis systems	132-137
Servomex Service network	138-145
Further resources	146-147
Notes	148-149

We analyze change, so you can make it happen

Servomex helps businesses worldwide to achieve a new level of accuracy in their operations. Our expertise empowers them to make more informed decisions, transform their processes, and make a meaningful impact.

Our global mission is to enable change through advanced gas analysis. We want to help you build a better world: one that's cleaner, healthier, and more productive.

Creating a cleaner world...

- Low-emission power generation
- Sustainable manufacturing
- Carbon-free fuels
- Cleaner air for all

Ensuring a healthier world...

- Safer processes, plants, and workplaces
- Secure, scalable systems
- High-purity medical oxygen
- Better healthcare

Innovating a more productive world...

- Faster, leading-edge technology
- More efficient use of resources
- Improved laboratory research
- Higher-quality chemical products

Analysis that **empowers**

SERVOMEX 
a spectris company

Helping you build a more sustainable world

We recognize our role in combating environmental deterioration and climate change, and are committed to conducting our business responsibly, providing products and services that reduce the environmental impact of our customers. We always act to manage and mitigate our impact on the world around us.

We have pledged to achieve carbon net-zero across our operations by 2030, driven by the three core pillars of our sustainability strategy.

- **Environment:** Reducing the impact of our customers and our own operations on our surroundings
- **Operational:** Supporting the values and sustainable goals of all our stakeholders
- **People:** Providing sustainable, rewarding careers in a safe and inclusive working environment



2023
ecovadis
Sustainability
Rating
GOLD

2022
ecovadis
Sustainability
Rating
GOLD

Servomex Group Ltd

Has been awarded an Ecovadis gold medal for its sustainability practices.

Find out more: servomex.com/sustainability

Our ethical approach

We're dedicated to working in a moral and responsible way. Doing the right thing is ingrained in our culture, and we demand the same high standards from our customers and supply chain. Our positive business practices empower our staff around the world to engage with all

our stakeholders in an honest, transparent, straightforward way.
You can rely on us to empower change and innovation in your industry.

We are principled

We do the right thing. Guided by our Code of Business Ethics, honesty, transparency, and trust are at the core of everything we do. We will always make responsible and sustainable choices for our customers, employees, and the environment.



We are reliable

You can count on us to help you champion change. Depend on accurate and stable readings from our gas analyzers, which are built to the highest standards. Our team will strive to deliver on promises and support your needs.



We are innovative

We spearhead research and pioneer technologies to bring you the best solutions. By staying ahead of the curve and anticipating your evolving needs, we deliver innovative products and services that help you transform your processes and gain a competitive edge.



We act as a team to achieve and maintain a world-class standard of ethical and legal behaviour, working together to deliver our promises, and constantly aiming to be at our best, while fully respecting the laws of the countries where we operate.

Oskar Ekström, Servomex General Counsel

Introducing your Specifier's Guide

Choosing the right gas analyzer for your essential process measurement can be a challenge. Factors such as gas measurement range, process environments and the sensing technology used can all affect the results achieved by your analyzer.

Our Specifier's Guide section is designed to help you identify the key criteria you need to address, leading you to make the best choice for your application.

We'll explore the variety of hazardous area, safety, and environmental certifications offered by gas analysis equipment, and what you should look out for when picking a gas analysis supplier.

Easy-to-use flowcharts are included, to help you solve your oxygen, carbon dioxide, carbon monoxide or methane measurement challenges.

If you need more guidance to find the ideal solution, get in touch with our expert team at servomex.com/contact

Range/purity

Your analyzer choice may depend on measurement range

Gas analyzers can measure gas concentration from complete purity to tiny trace levels, depending on the sensing technology and configuration used.

Ensuring that the gas concentration stays within a certain level is essential for applications which control processes for safety and efficiency. Additionally, gas purity measurements need to ensure the required purity by measuring ultra-trace levels of contamination.

%

Percentage

These analyzers measure gas concentration based on its parts per hundred ratio in the gas mixture. This is often a large-scale measurement.

ppm

Parts Per Million

Sometimes referred to as trace-level measurements, ppm results are used for many applications, including combustion control, and emissions monitoring.

ppb/ppt

Ultra-trace

Gases in medical or semiconductor applications must have a very high level of purity, so it is necessary to measure even the smallest impurities.

SERVOTOUGH	O ₂	Ar	CO	CO ₂	He	C1-C6	NMHC	H ₂	HCl	CH ₄	N ₂
Oxy 1900	%										
OxyExact 2200	%										
SpectraExact 2500			% ppm	% ppm		%			% ppm	%	
FluegasExact 2700	%		ppm								
Laser 3 Plus Environment											
Laser 3 Plus Combustion	%		ppm							%	
Laser 3 Plus Process	%										

SERVOPRO	O ₂	Ar	CO	CO ₂	He	C1-C6	NMHC	H ₂	HCl	CH ₄	N ₂
AquaXact 1688											
MonoExact DF150E	ppm/b				w						
MonoExact DF310E	ppm/b										
MultiExact 4100	% ppm		% ppm	% ppm						% ppm	
MultiExact 4200	%		ppm	ppm						ppm	
4900 Multigas	%		% ppm	%						ppm	
Plasma											ppm
FID											
Chroma	ppm/b	ppm/b	ppm/b	ppm/b	ppm/b		ppm/b	ppm/b		ppm/b	% ppm/b
NanoChrome	ppb/t	ppb/t	ppb/t	ppb/t			ppb/t	ppb/t		ppb/t	ppb/t
DF-500 Range	ppm/b/t										
DF-700 Range	ppm/b/t										
NanoChrome ULTRA	ppb/t	ppb/t	ppb/t	ppb/t			ppb/t	ppb/t		ppb/t	ppb/t
NanoTrace DF-560E ULTRA	ppm/b/t										
NanoTrace DF-750 ULTRA											
NanoTrace DF-760E ULTRA	ppm/b/t										

SERVOFLEX	O ₂	Ar	CO	CO ₂	He	C1-C6	NMHC	H ₂	HCl	CH ₄	N ₂
Micro i.s. 5100	%										
MiniMP 5200	%			%							
MiniHD 5200	%		%	%							

NH ₃	C ₃ H ₆	THC	H ₂ O	SO ₂	KEY APPLICATIONS HAZARDOUS AREA	PAGE
					■ Process control ■ Flare stack analysis ■ Vapor recovery ■ Safety-critical oxidation	103
					■ Oxidation control reactions ■ EO, PTA and EDC manufacturing ■ Catalyst regeneration ■ Solvent recovery	104
%	%	%	%		■ Water in EDC/solvents ■ Ethylene production ■ TDI production ■ Chlorine production	105
					■ Process heaters ■ Utility boilers ■ Thermal crackers ■ Crematoria and incinerators	107
ppm					■ Process heaters ■ Incinerators ■ Power stations ■ Furnaces ■ Thermal oxidizers	108
					■ Process heaters ■ Incinerators ■ Power stations ■ Furnaces ■ ESP protection ■ Thermal oxidizers	109
					■ Oxidation control ■ Inerting ■ Safety monitoring ■ Flare gas monitoring ■ Combustion control (<500°C) ■ Coal to chemical	110

NH ₃	C ₃ H ₆	THC	H ₂ O	SO ₂	KEY APPLICATIONS SAFE AREA	PAGE
			ppmvdP		■ Glove boxes ■ Solder reflow ovens ■ Compressed air generation ■ Ethylene production	112
					■ Glove boxes ■ Heat treating ■ Solder reflow ovens ■ Industrial gas production	113
			ppm		■ Air separation units ■ Medical/industrial gases ■ Specialty gas blending	114
			ppm		■ Product purity on ASU ■ Validation of medical O ₂ , N ₂ and air ■ Process control on ASU ■ Monitor trace CO ₂ on scrubbed air inlet to air separation process	115
					■ Hydrogen production ■ HyCO plants ■ Syngas production	116
				ppm	■ Utility boilers ■ Clinical waste incinerators ■ Chemical incinerators ■ Mobile labs	117
					■ Argon production ■ Truck loading ■ Pure gas bottling ■ Specialty gas laboratories	118
		ppm			■ Cryogenic air separation ■ Process control ■ Food gas manufacture ■ Product validation	119
					■ Medical gas production ■ ASU ■ Cryogenic truck loading station ■ High purity gas production	120
					■ Semiconductor production ■ Quality control measurements ■ Stationary analytical systems UHP gas production	121
					■ Continuous quality control monitoring ■ Post purifier quality certification ■ Leak detection for electronics grade gases	122
			ppm/b/t		■ Continuous quality control monitoring ■ Bulk gas cylinder quality control ■ Trace moisture analysis	123
					■ Semiconductor production – quality control measurements – stationary analytical systems ■ UHP gas production	124
					■ Continuous quality control monitoring ■ Inert gases control checks ■ Post-purifier quality certification ■ Leak detection	125
			ppm/b/t		■ Continuous quality control of bulk UHP gases for semiconductor fabs	126
			ppm/b/t		■ Monitoring O ₂ and H ₂ O as comtaminants in UHP bulk gases used in semiconductor applications	127

NH ₃	C ₃ H ₆	THC	H ₂ O	SO ₂	KEY APPLICATIONS PORTABLES	PAGE
					■ Process monitoring ■ Inerting applications ■ Controlled atmosphere ■ Hazardous area combustion optimization	129
					■ Laboratories and research ■ Air separation and gas bottling plants ■ Transfilling ■ Combustion analysis ■ Medical gas verification	130
					■ Physiology studies ■ Universities ■ Combustion optimization	131

Measurement type key: Percent **%** | Parts Per Million **ppm** | Per Billion **/b** | Per Trillion **/t** | By volume **v** | Dew Point **dp**

Choose an analyzer certified for your process

Be confident that your analyzer will meet safety requirements and perform to the required level. Official certifications, approvals and compliances ensure that your analyzer has been fully tested and approved for use in specified conditions.

Examples of major international certifications for gas analyzers:



These certifications utilize a range of protection concepts and global agencies for the certification of equipment for use in potentially explosive atmospheres, including testing to European and International Safety and EMC Standards, and North American General-Purpose requirements. They offer UK Ex, ATEX, IEC Ex, and North American certifications for harsh environments and for dust and gas hazardous areas.



Assessing electrical equipment and components, typically related to safety, IEC 61010-1 specifies general safety requirements for test, measurement, and process control equipment, along with laboratory instrumentation. IEC 61326-1:2012 specifies requirements for immunity and emissions regarding electromagnetic compatibility (EMC) for electrical equipment.



Built around International and European standards, to ensure that monitoring data is of a high level, the UK Environment Agency's Monitoring Certification Scheme (MCERTS) provides a route to compliance with European Directives that regulate industrial emissions.



Based on the European EN 15267 Air Quality standard for certification of automated measuring systems, QAL1 is an internationally recognized German standard for performance testing of automated measuring systems used for the purpose of monitoring emission limit values at plants and incinerators.



Safety Integrity Level (SIL) is a measurement of performance required for a safety instrumented function. It is defined as a relative level of risk reduction provided by a safety function, or to specify a target level of risk reduction. In the European functional safety standards based on the IEC 61508 standard, four SILs are defined. SIL is determined based on several quantitative factors in combination with qualitative factors such as development process and safety life cycle management.



Oxygen

A colourless and odourless gas, oxygen (O₂) makes up approximately 21% of the earth's atmosphere. It is essential to human life, and so is vital to many medical gas applications.

O₂ also has many industrial uses, including the production of metals and plastics. Oxide compounds are used in a wide range of processes so, in many applications, O₂ measurements are key to process control, safety, and efficiency.

O₂ is not harmful to the environment, but O₂ emissions may need to be monitored as part of a continuous emissions monitoring system.

Several sensing technologies are available to measure O₂, and the most appropriate solution depends on the application.


For example, Paramagnetic sensing is a long-proven method of measuring percentage O₂ and is ideal for many industrial processes, as well as life safety monitoring.

Zirconia provides a trusted, in-situ parts-per-million measurement for combustion applications – O₂ measurements are essential to controlling the combustion reaction.

O₂ is often found as a contaminant in high-purity gases such as nitrogen and argon, so a Coulometric sensor offers excellent ultra-trace detection of O₂ down to parts-per-trillion concentrations.

Use pages 14-15 to identify the best O₂ solution for your process

What level/range of **oxygen** do you require?

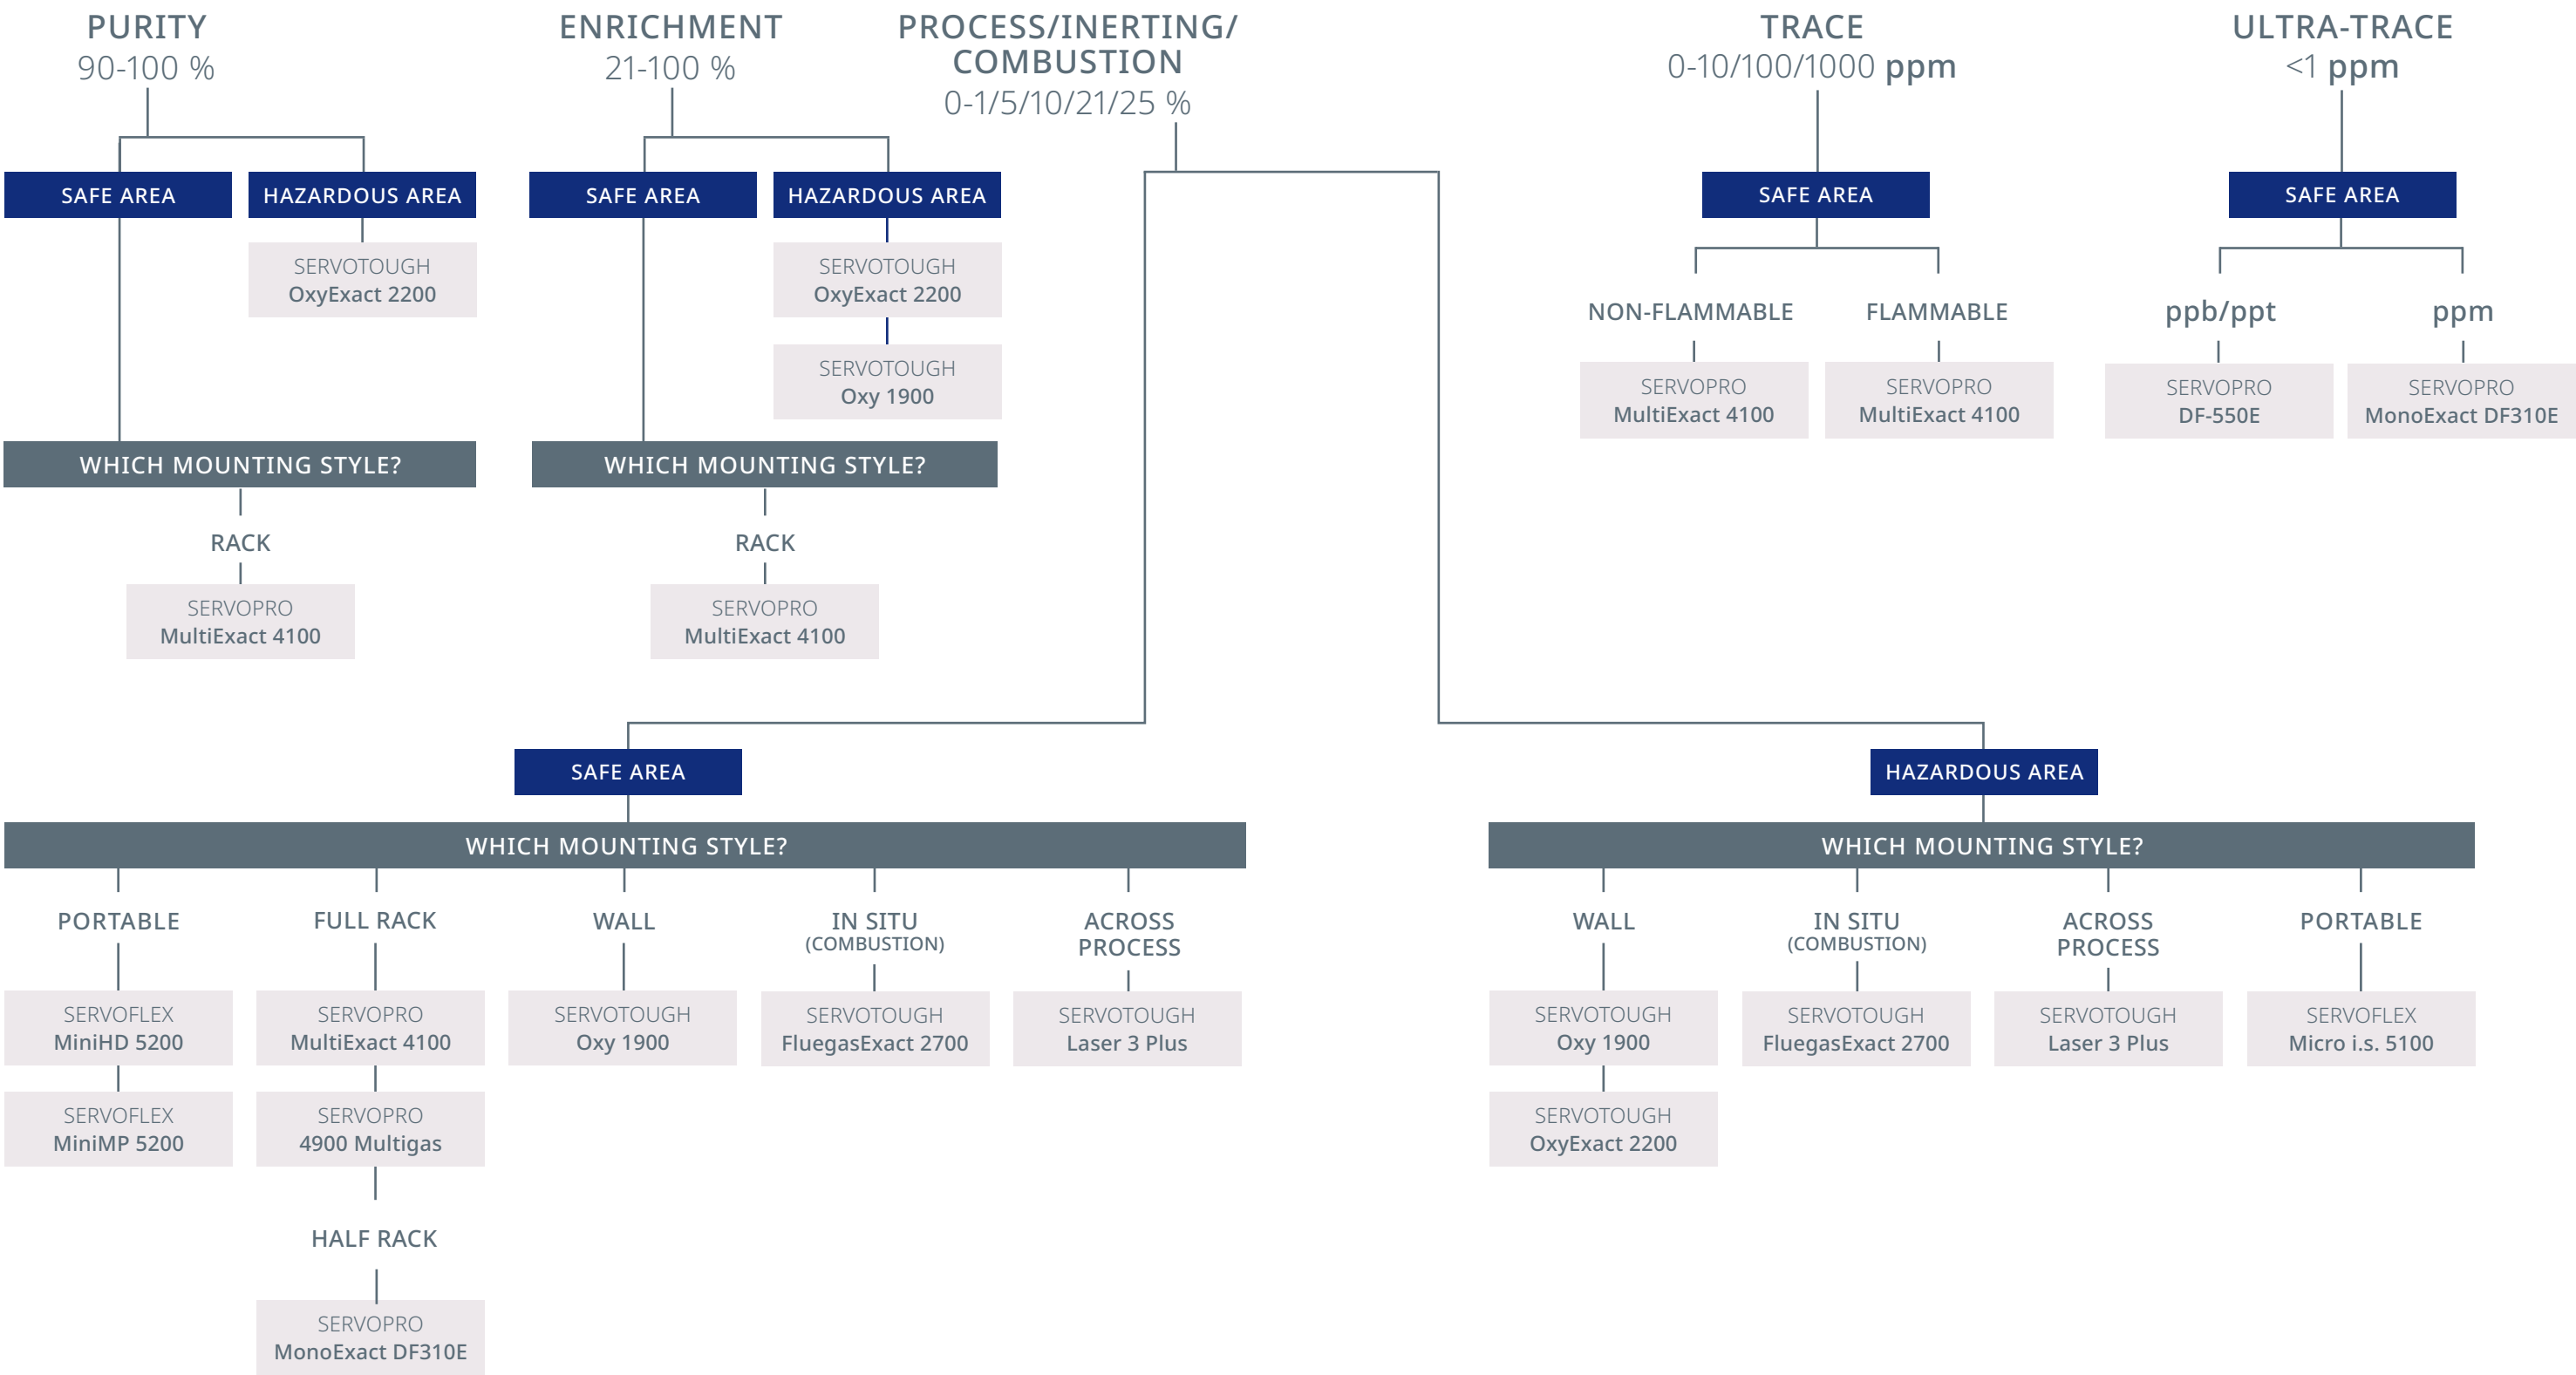

See our full range of analyzers on [pages 102-133](#) or visit: [servomex.com](#)

The right solution for your process environment

Hazardous area
SERVOTOUGH



Analizers designed to operate in hostile environments, including high temperatures, acidic or corrosive conditions, or outdoors, exposed to the weather. Typically enclosed in protective casings, meeting specific standards for hazardous area operation.

servomex.com/servotough

Safe area
SERVOPRO



Analizers built to operate in standard ambient conditions, such as those found in a laboratory, air separation unit, or any non-hazardous industrial environment. They require no special adaptations to operate reliably in these conditions.

servomex.com/servopro

Portable
SERVOFLEX



Mobile analyzers typically designed for use in safe areas. However, they also need to have a robust design in order to cope with being transported to and from each measurement site, as well as day-to-day operation in the field.

servomex.com/servoflex

Hazardous area enclosures

A range of custom-built enclosures are offered by the Servomex systems team to ensure safe and reliable operation in hazardous environments.

These rugged enclosed cabinets keep instruments under controlled conditions for reliable, continuous performance, while allowing easy access for maintenance.



Methane

The primary constituent of natural gas, methane (CH_4) is an extremely flammable hydrocarbon, and can form explosive mixtures with air. It is used in many industrial processes, both as a chemical feedstock and as fuel.

When methane is used in combustion, it is important to measure CH_4 levels in the heater, to ensure safety. Pockets of high methane concentration can form during the process,

which significantly increases the risk of an explosion. These may not be detected by spot measurements, so a cross-stack analyzer is better suited to this application.



Methane is used in the production of hydrogen gas through the steam reforming process, where the measurement of CH_4 is key to reaction efficiency and safety.

CH_4 reactions are typically difficult to control, so accurate monitoring by a gas analyzer is essential for safety and efficiency.

It may also be a contaminant in medical or semiconductor gases, so must be measured at trace levels to ensure product purity.

Methane is a greenhouse gas, so many industrial processes must be monitored to ensure CH_4 emissions do not exceed environmental regulatory limits.

What measurement/range do you require?

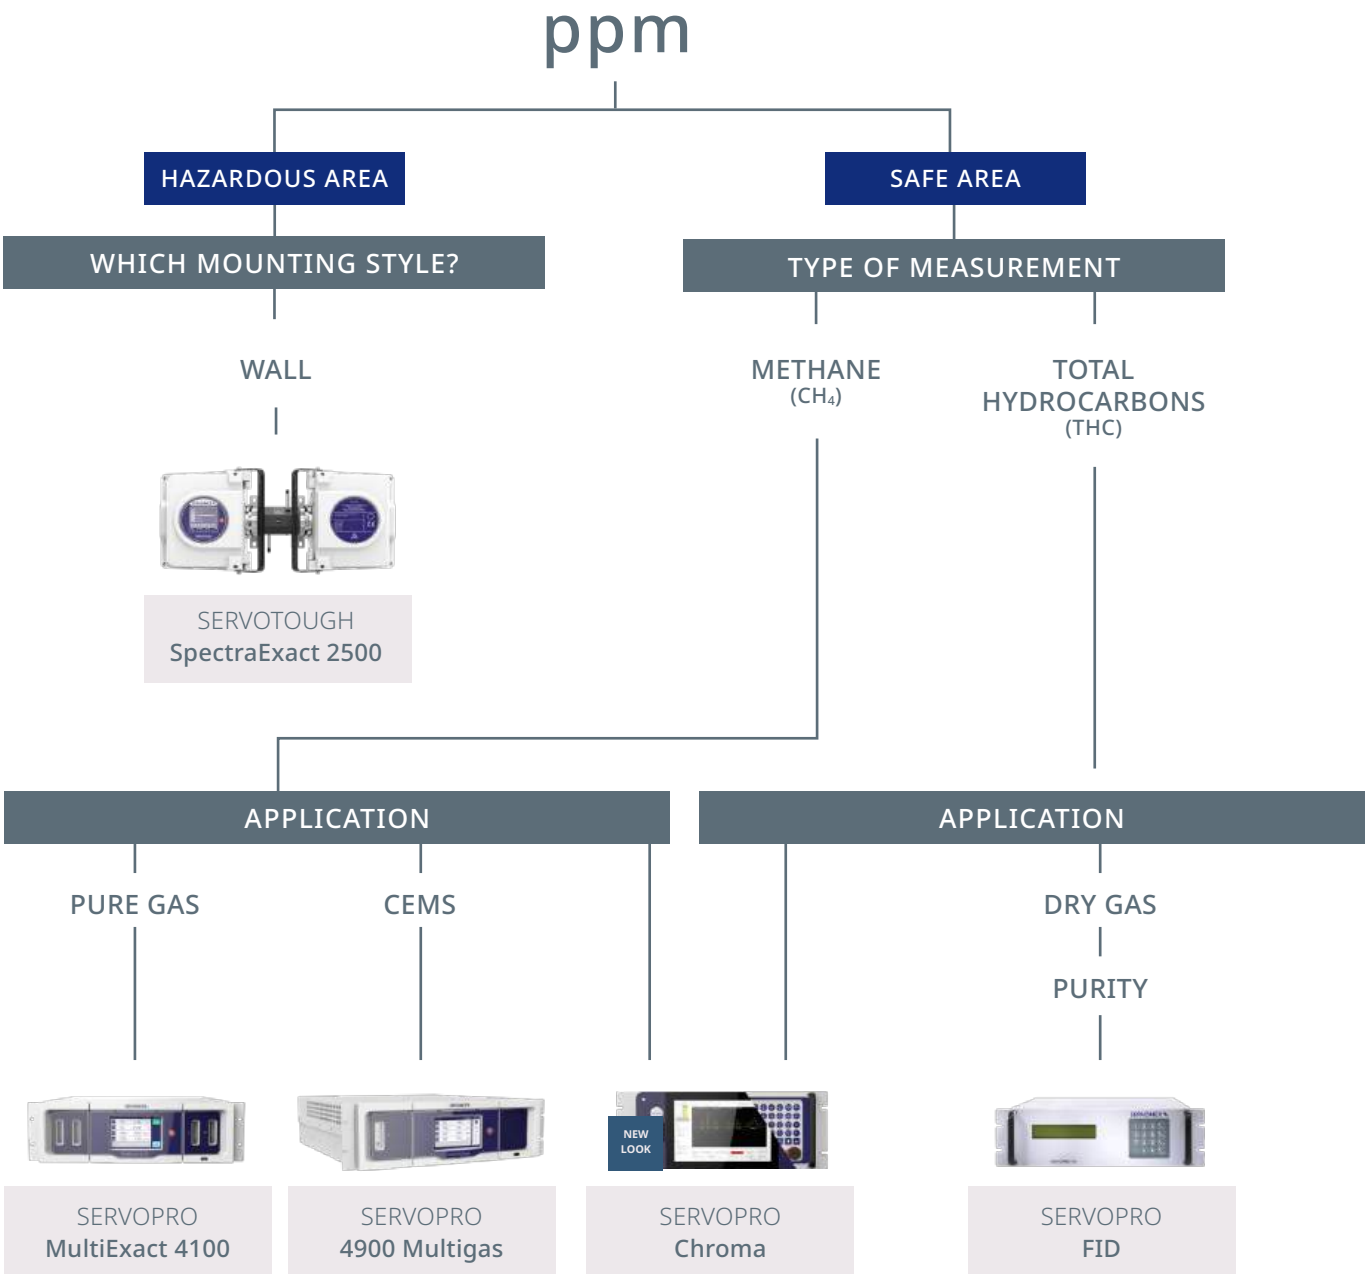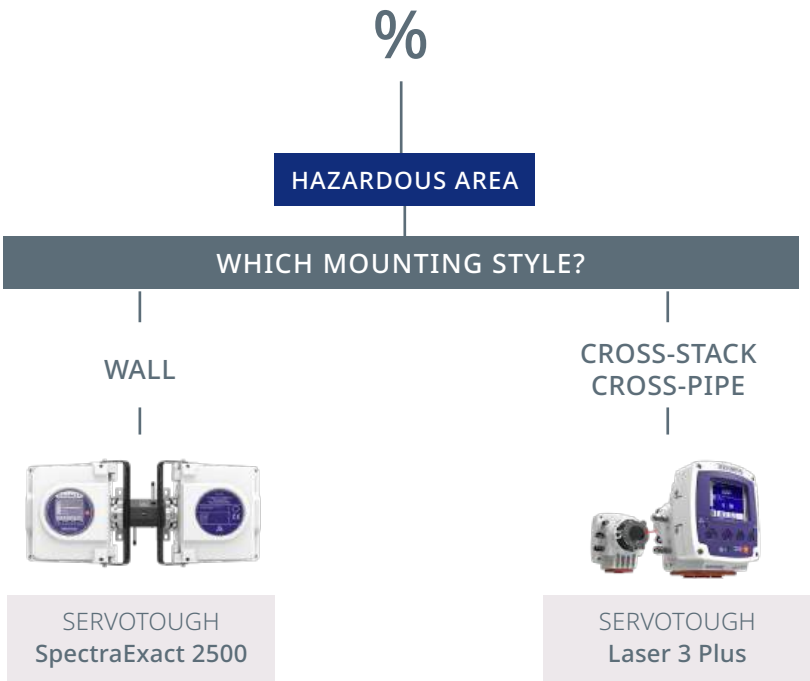

See our full range of analyzers on **pages 102-133** or visit: **servomex.com**

Selecting the right gas analyzer partner

If you're unfortunate enough to pick the wrong gas analyzer supplier, it can lead to problems from the outset. However, the right choice will ensure smooth installation and many years of successful analyzer operation.



The main points to look out for:

Expertise Deep applications knowledge will ensure the supplier understands the challenges you need to overcome, enabling them to find the best solution for your process – or create a bespoke one if necessary.	Ethics Partnering with a company that operates in a moral and responsible way – with strong and clearly established ethics policies – ensures your own business dealings are being handled properly, and protects you and your company from reputational damage.	Reputation What do others in your marketplace think of the supplier? Are they well thought of, and do their products have a strong track record?	Support To ensure maximum value from your gas analyzer, choose a supplier that delivers the support you need, when and where you need it. After all, gas analyzers are a long-term investment, and require support and maintenance to continue to operate at peak efficiency over their long lifetime.
--	--	--	--



CO₂

Carbon dioxide

Carbon dioxide (CO₂) is a colourless gas with applications in the food, oil, and chemical industries, and is used in many pressurized gas tools.

Many industrial processes need to monitor CO₂ for process control and efficiency. Additionally, CO₂ is the largest contributor to global climate change, so emissions are also measured by industrial plants to prove compliance with environmental regulations.

Since it is present in air at trace levels, CO₂ is often encountered as a contaminant in high-purity gases, so measurements of very low-level CO₂ must be achieved for this application.

Use pages **22-23** to identify the best CO₂ solution for your process

CO

Carbon monoxide

Carbon monoxide (CO) is a poisonous, flammable gas which is colourless, odourless, and tasteless. It has applications in the chemical, food, medical and metals industries.



Measuring CO (along with O₂) helps to maintain the combustion reaction at an optimum balance, maintaining safety and reducing fuel costs. CO may also be monitored to avoid impurities in the production of industrial, medical, and UHP gases.

As it is regarded as a criterion pollutant under many environmental standards, any industrial emissions of CO must be monitored to ensure regulatory compliance.





Use pages **24-25** to identify the best CO solution for your process

What level/range of **carbon dioxide** do you require?

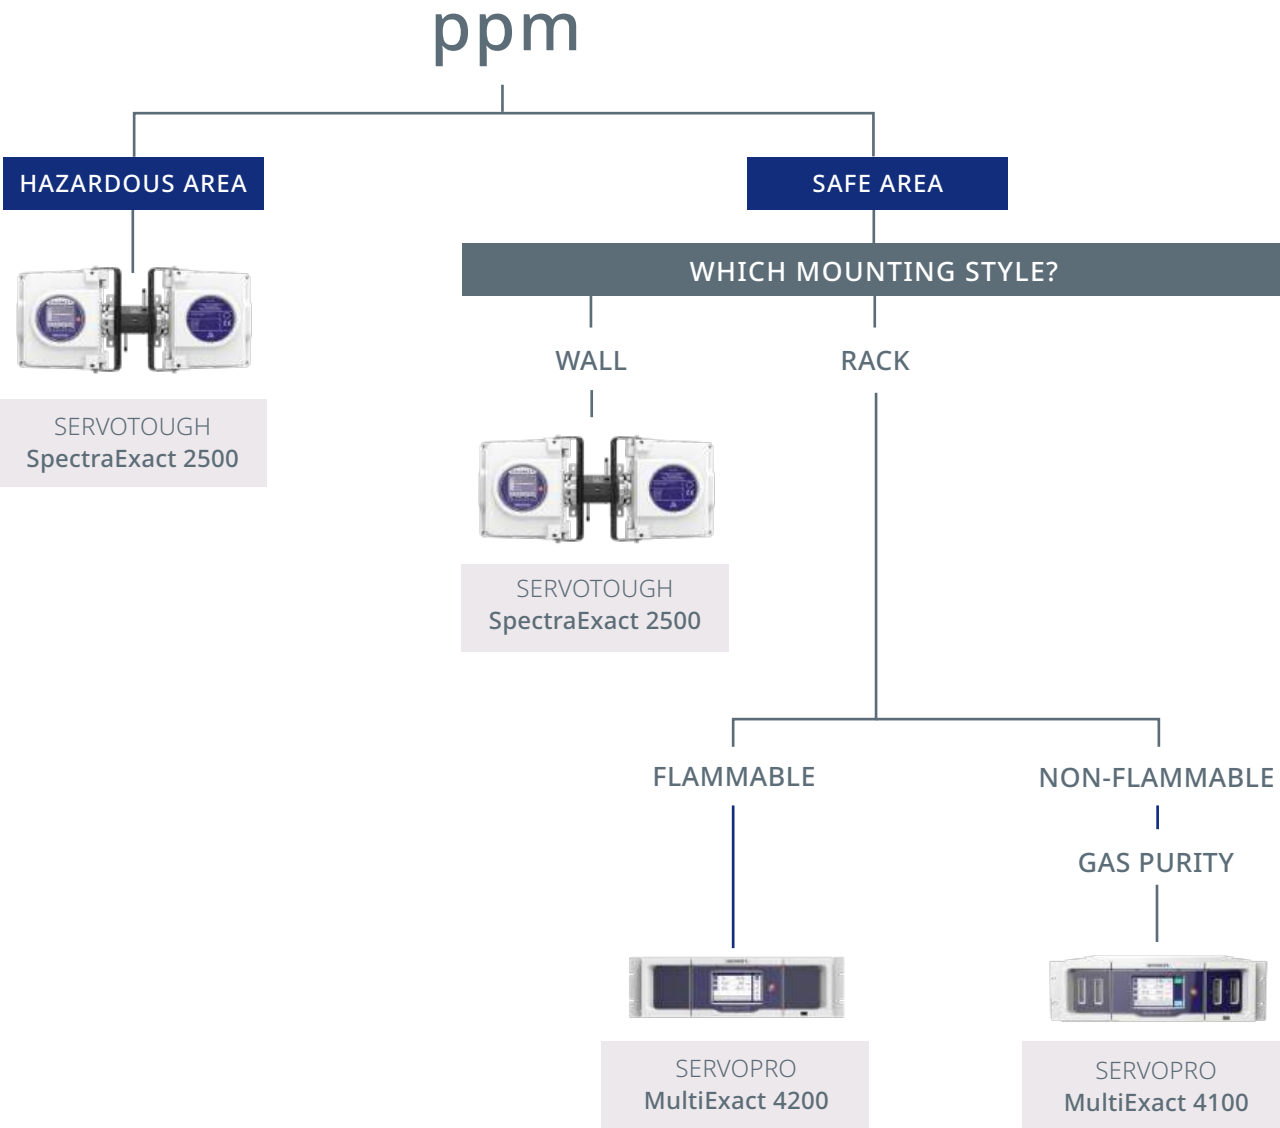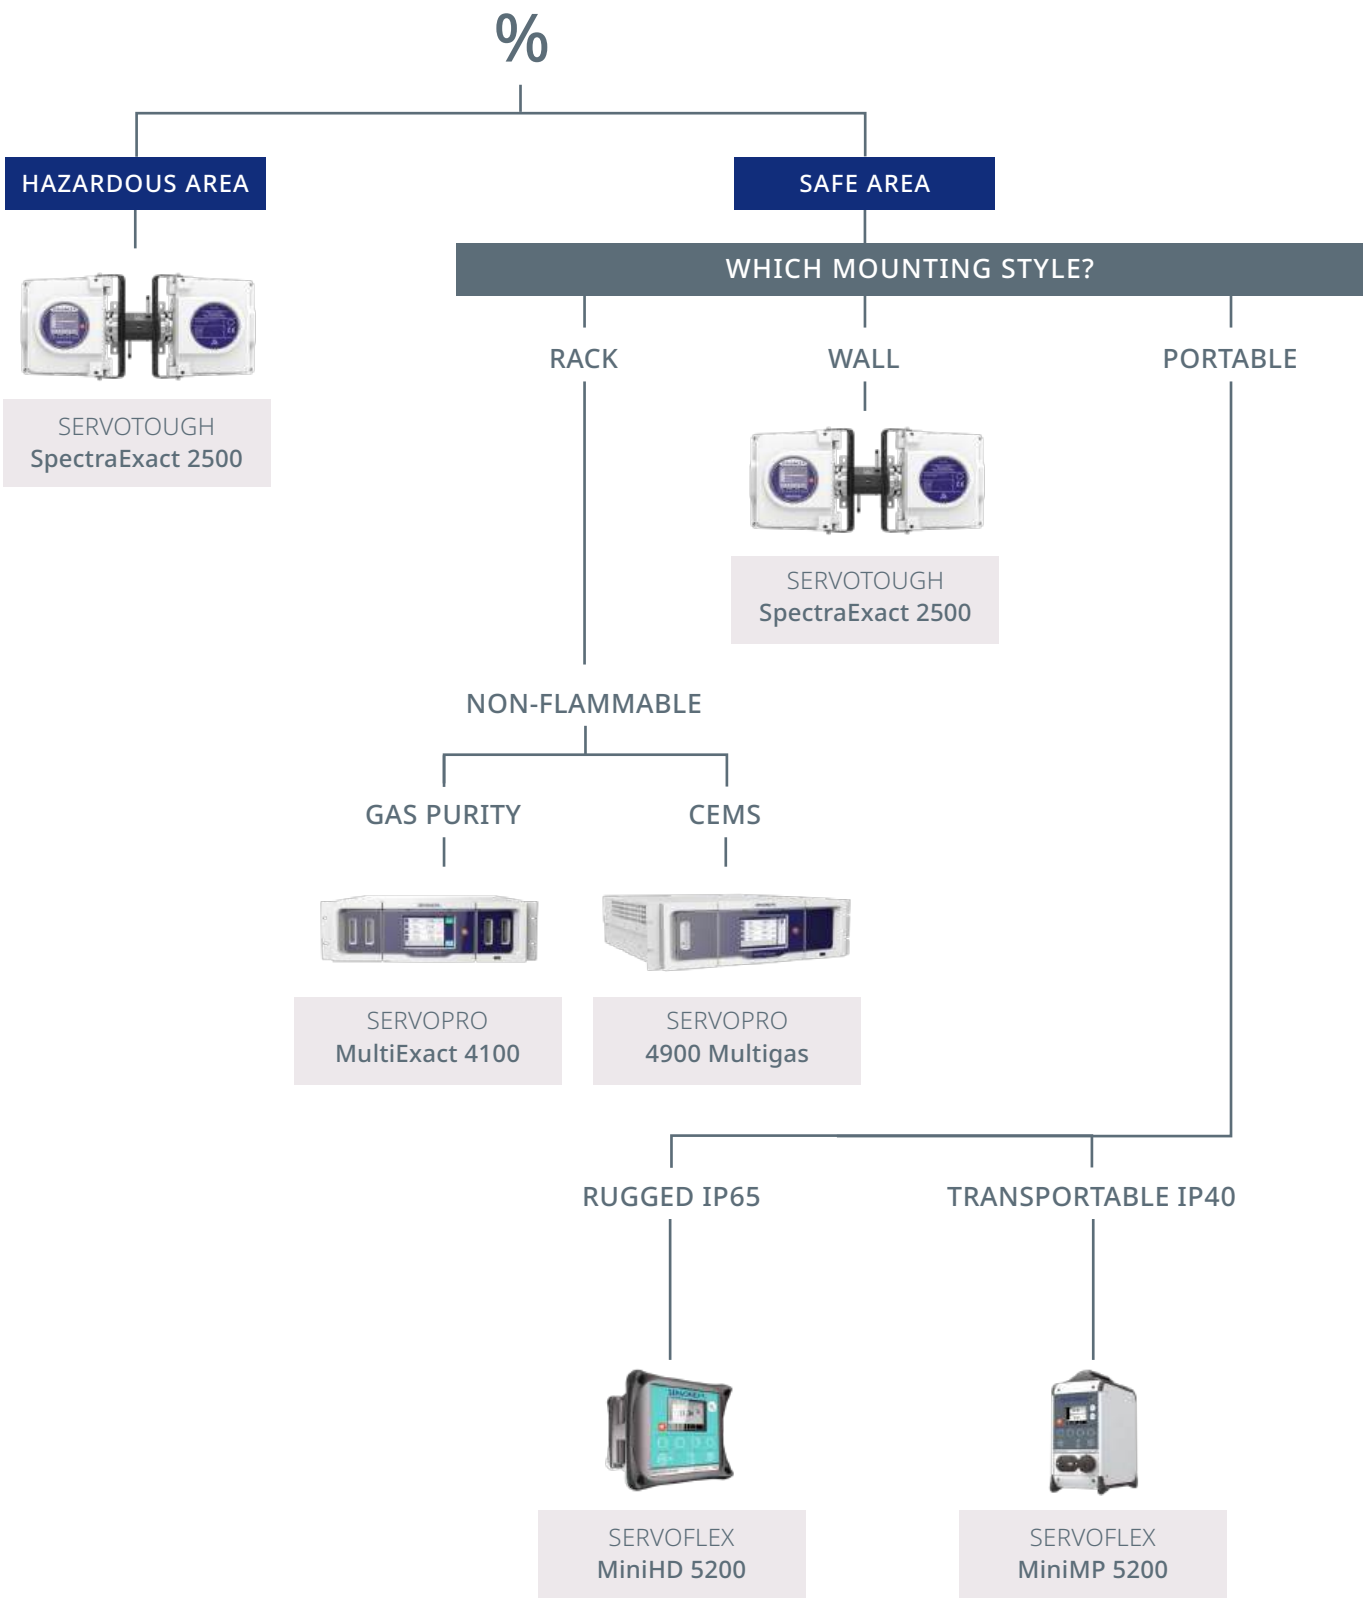

See our full range of analyzers on **pages 102-133** or visit: **servomex.com**

What level/range of **carbon monoxide** do you require?

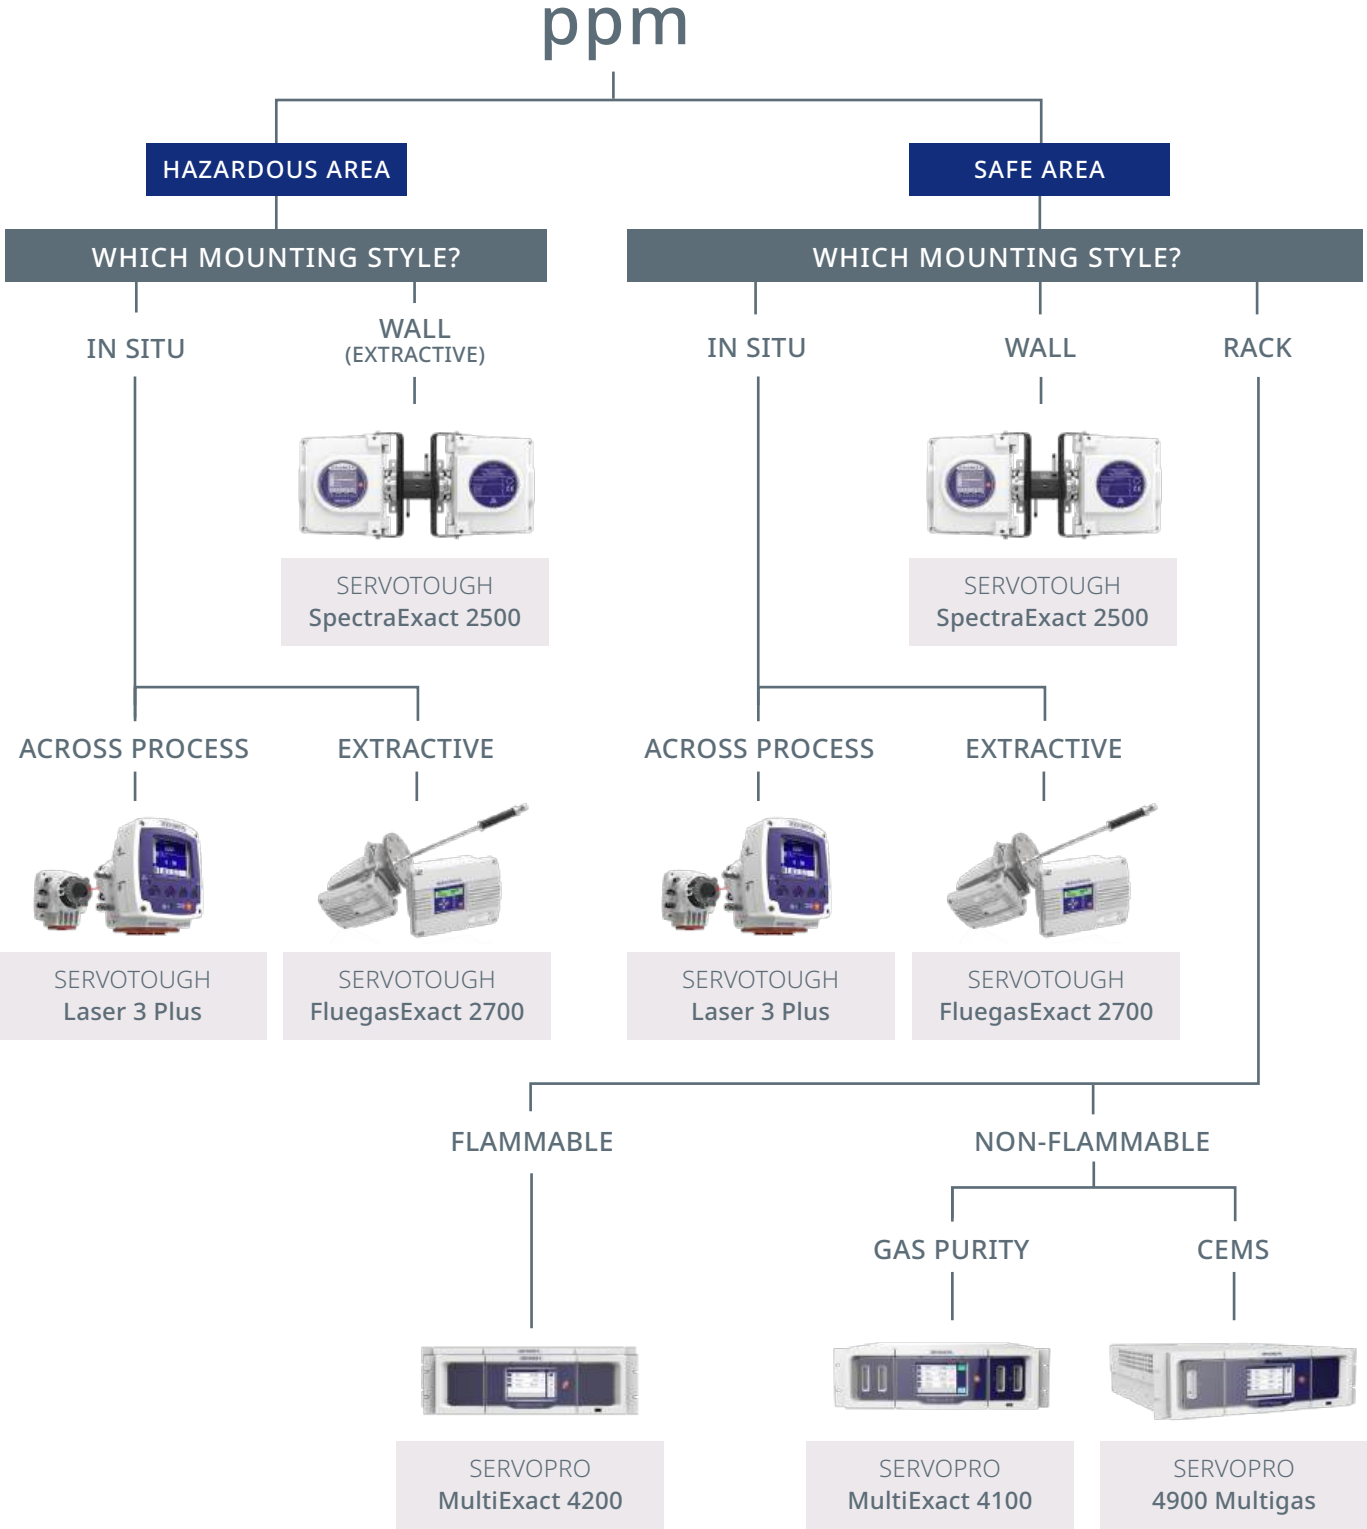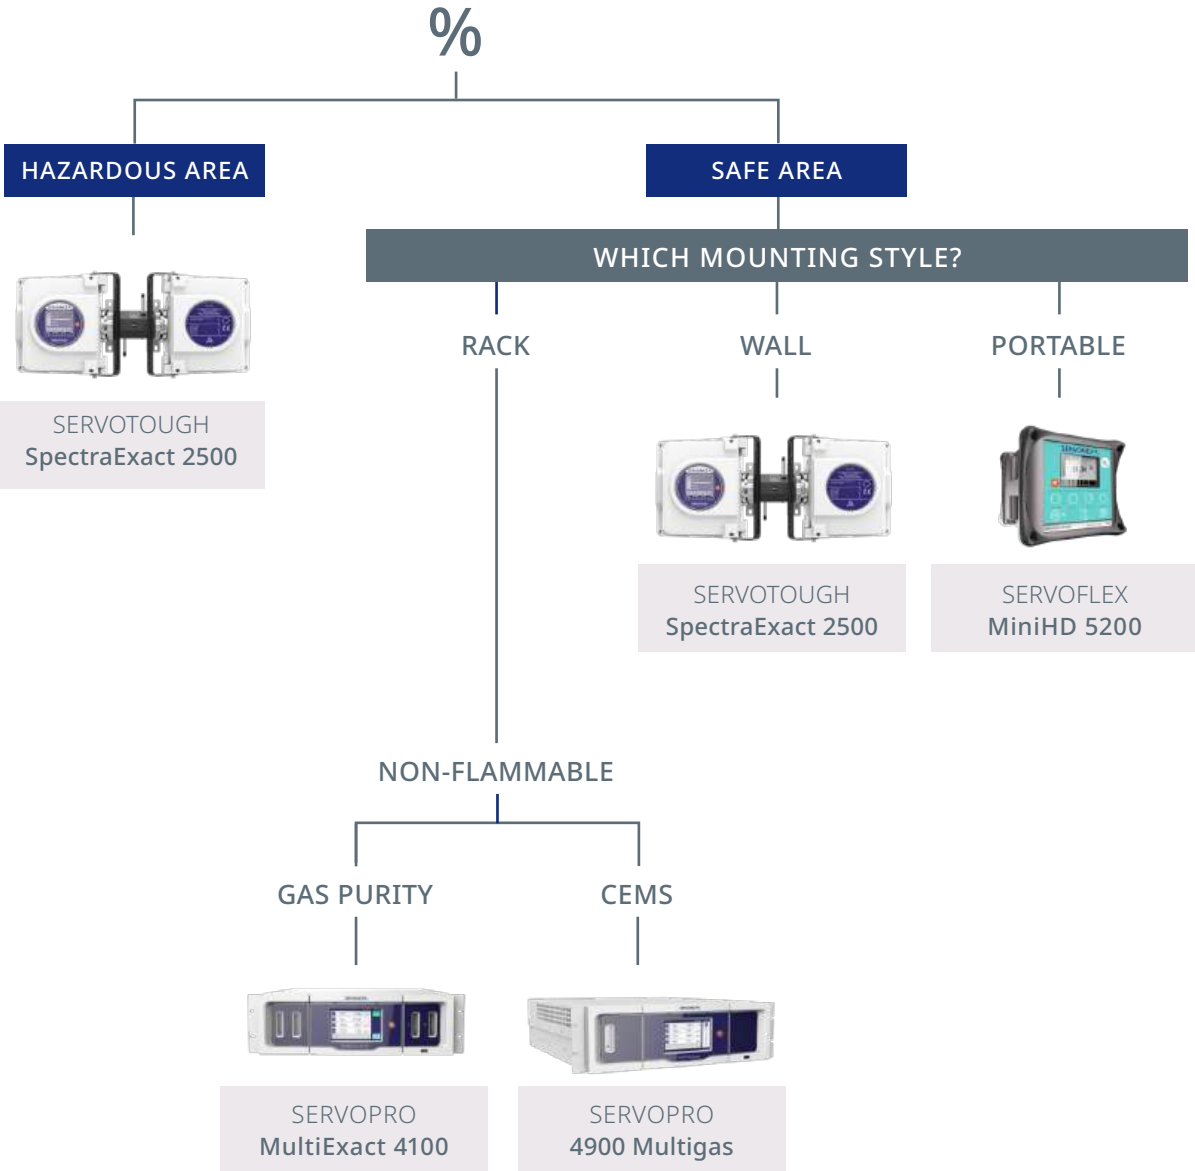

Our solutions for key gas analysis applications

Gas analysis application	Key Servomex solutions
Air separation units	SERVOPRO MultiExact 4100, SERVOPRO AquaXact 1688, SERVOPRO Chroma
Medical gases	SERVOPRO MultiExact 4100, SERVOPRO Chroma
Ultra-high-purity gases and semiconductors	SERVOPRO NanoTrace DF-560E ULTRA, SERVOPRO NanoTrace DF-750 ULTRA, SERVOPRO NanoChrome ULTRA, SERVOPRO NanoTrace DF-760E ULTRA
Clean air	SERVOTOUGH FluegasExact 2700, SERVOTOUGH Laser 3 Plus Combustion, SERVOTOUGH Laser 3 Plus Environmental, SERVOPRO 4900 Multigas, SERVOTOUGH SpectraExact 2500
Pre-combustion carbon capture	SERVOPRO 4900 Multigas, SERVOTOUGH SpectraExact 2500, SERVOPRO AquaXact 1688, SERVOPRO MultiExact 4100, SERVOTOUGH Oxy 1900, SERVOPRO DF-745 SGMax
Oxyfuel combustion carbon capture	SERVOTOUGH Oxy 1900, SERVOPRO MultiExact 4100, SERVOTOUGH Laser 3 Plus Process, SERVOTOUGH FluegasExact 2700, SERVOPRO 4900 Multigas, SERVOTOUGH SpectraExact 2500, SERVOPRO DF-745 SGMax, SERVOPRO AquaXact 1688, SERVOTOUGH OxyExact 2200
Post-combustion carbon capture	SERVOPRO 4900 Multigas, SERVOTOUGH SpectraExact 2500, SERVOPRO DF-745 SGMax, SERVOPRO AquaXact 1688, SERVOPRO MultiExact 4100, SERVOTOUGH Oxy 1900, SERVOTOUGH Laser 3 Plus Process

Gas analysis application	Key Servomex solutions
Direct reduction iron	SERVOTOUGH Oxy 1900, SERVOPRO 4900 Multigas, SERVOTOUGH SpectraExact 2500
Ethylene production	SERVOTOUGH SpectraExact 2500
Ethylene dichloride production	SERVOTOUGH SpectraExact 2500
Ethylene oxide production	SERVOTOUGH OxyExact 2200
HyCO/Hydrogen production	SERVOPRO MultiExact 4200
Marine vapor control	SERVOTOUGH Oxy 1900, SERVOTOUGH OxyExact 2200
Process heaters and furnaces	SERVOTOUGH FluegasExact 2700, SERVOTOUGH Laser 3 Plus Combustion
Propylene oxide production	SERVOTOUGH Oxy 1900
Purified terephthalic acid production	SERVOTOUGH OxyExact 2200
Thermal power: coal	SERVOTOUGH FluegasExact 2700
Vinyl chloride monomer production	SERVOTOUGH SpectraExact 2500

Gas analysis solutions for your applications

Servomex provides an extensive range of scalable gas analysis solutions, from single analyzers to turnkey application systems in off-the-shelf and customized designs. These are used in hundreds of industrial applications across many different sectors.

In this section, we highlight some key examples of the hundreds of processes that use our gas analysis products to overcome their core application challenges.

We have divided it into two sections: Purity & Specialty – covering industrial, medical, and ultra-high-purity gases, including semiconductor processes, and Industrial Process & Emissions – covering power generation, hydrocarbon processing, and emissions monitoring.

Our extensive array of sensing technologies ensure we can find the best-fit solutions for your process, supported by our deep applications knowledge and global service network.


Get in touch with our experts to learn more:
servomex.com/contact

Purity and Specialty (P&S)

Our P&S division delivers gas analysis products, knowledge and service support to market sectors including:

- Complete gas analysis for industrial gases
- High-purity trace analysis for medical gases
- Ultra-trace solutions for semiconductor gas applications


Meet the team online

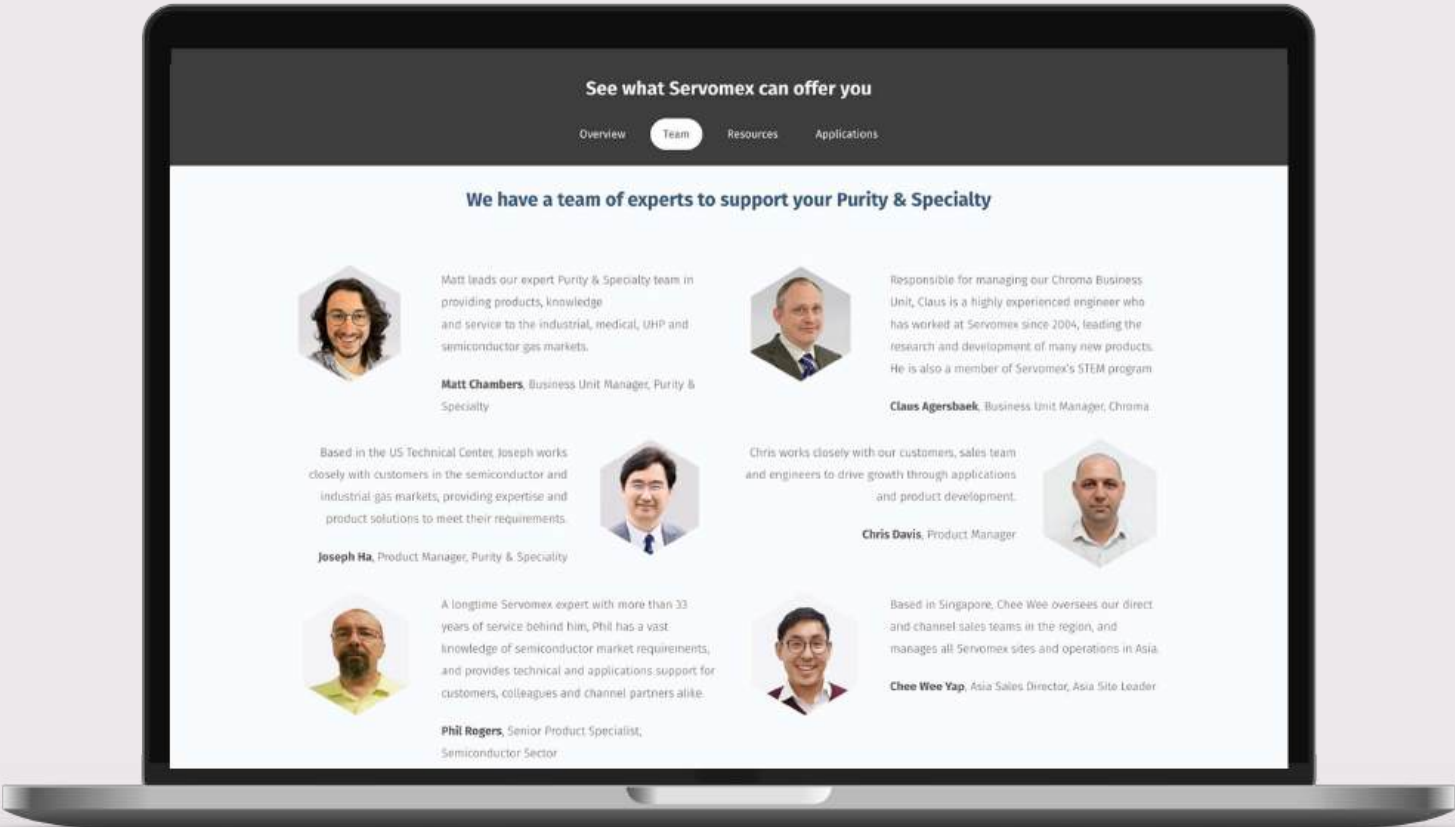

Get in touch to learn more: servomex.com/ps



Air separation unit process

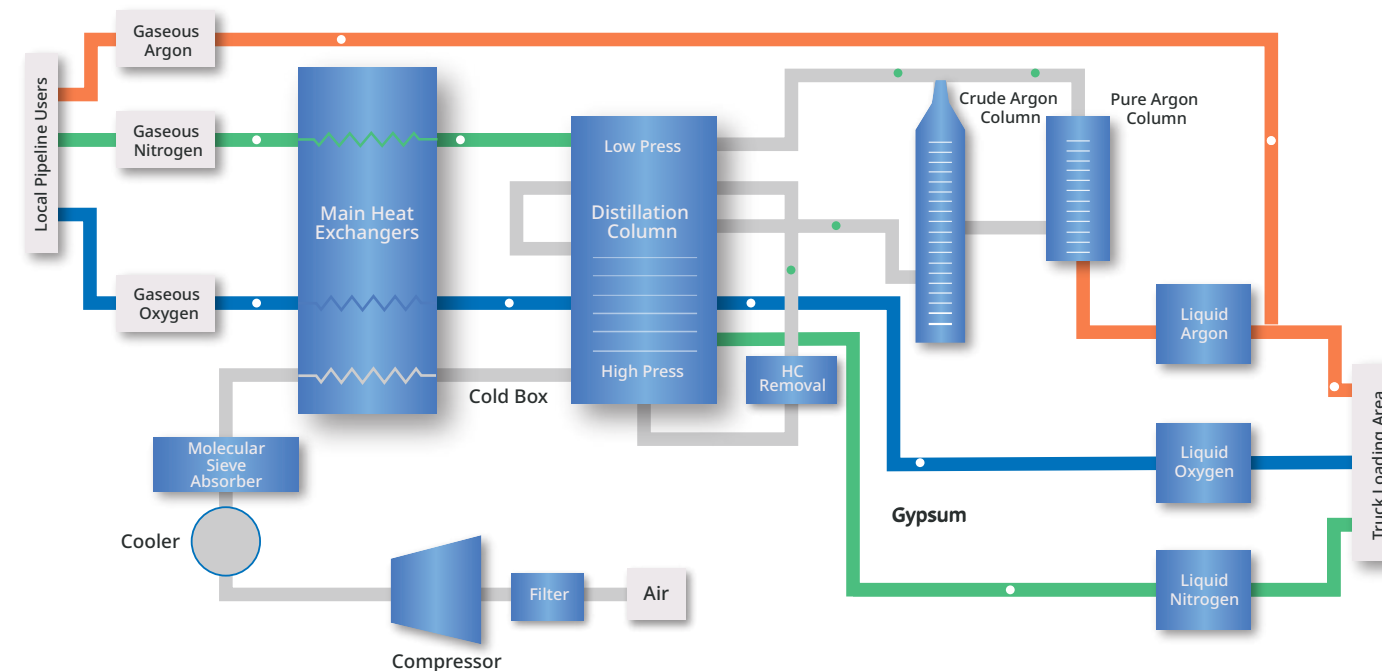

Air separation unit (ASU) applications

Improving process control, safety, and product quality are critical considerations for ASU applications.

The ASU separates atmospheric air into pure gaseous nitrogen, oxygen and argon.

Further separation is required for quantities of noble gases such as neon, krypton and xenon. Accurate gas compositional analysis is essential to ensure purity across the air separation process.


It is essential to maintain product purity between the separation process and product transportation by pipeline or vehicle. This relies on highly accurate trace measurements for a range of impurities to ensure that quality is maintained at the highest possible standards.



SERVOPRO
MultiExact 4100



SERVOPRO
AquaXact 1688



SERVOPRO
Chroma

Key solutions

We have a broad range of analytical solutions providing continuous, reliable analysis throughout the process. These include the **SERVOPRO MultiExact 4100** multigas analyzer, **SERVOPRO AquaXact 1688** moisture sensor, and the versatile **SERVOPRO Chroma**. All of which provides the complete application measurements required to control the process, ensure product purity and guarantee plant safety.



Watch our application video: servomex.com/asu



Medical gases

Gases for medical treatment are regulated like medicinal drugs. These regulations are typically covered in a publication called a Pharmacopeia, and specify production and validation methods, the acceptable purity level, and official measurement records.

For instance, under European Pharmacopeia (EP) rules, medical oxygen (O₂) requires an assay measurement to ensure that its O₂ purity is better than 99.5%. It also needs measurements of carbon monoxide (CO) and carbon dioxide (CO₂) to ensure that the impurities are less than 5 parts per million (ppm) of CO and less than 300 ppm of CO₂.

Servomex's high-performance solutions and technologies deliver the measurements required to meet US and European Pharmacopeia concentration limits for medical gas quality using industry-approved sensing techniques.



SERVOPRO
MultiExact 4100



SERVOPRO
Chroma


Key solutions

The **SERVOPRO MultiExact 4100** is an advanced solution for purity assay and impurity detection. It offers a combined solution for all three medical oxygen analytes, meeting EP standards and providing the measurement limits required. A multi-gas analyzer capable of monitoring up to four gas streams simultaneously, it can be fitted with a Paramagnetic cell for a highly stable O₂ reading, and a customized Infrared Gas Filter Correlation (GFC) sensor for CO and CO₂.

The **SERVOPRO Chroma** provides measurements for nitrogen assay and the determination of carbon dioxide impurity in nitrous oxide using Thermal Conductivity Detector sensing. The nitrogen assay measurement meets the European Pharmacopeia's required concentration limit of greater than 99.5% purity and the US National Formulary requirement of 99%.



Watch our application video: servomex.com/medical-gases

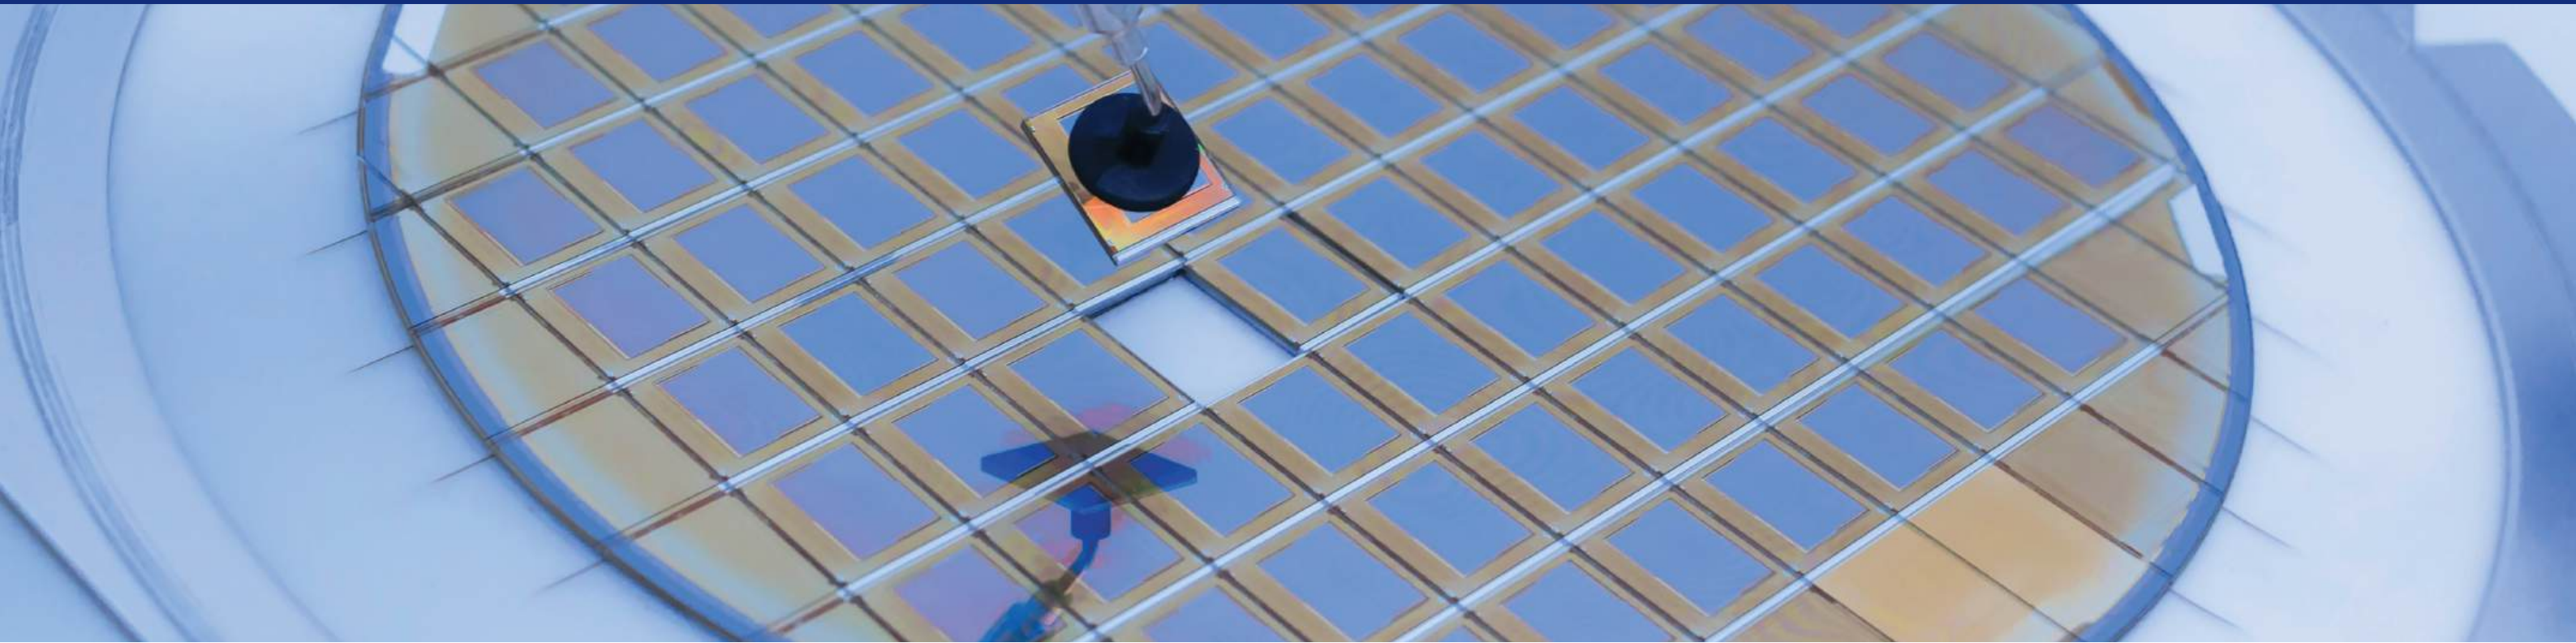

Ultra-high purity gases and semiconductors

Ultra-high purity (UHP) gases are essential for semiconductor manufacturing and the production of electronics such as LED and LCD displays.

Manufacturing the silicon wafers needed for semiconductor applications requires ultra-pure gases, as even the smallest impurities in the production atmosphere can cause major

defects in a wafer, resulting in costly scrap and waste.

To ensure that UHP gases of the correct quality are delivered to the manufacturing process, multiple gas purification techniques and other strict procedures are used. This requires accurate gas monitoring at very low levels of concentration.

Quality control gas measurements must cover all the impurities present. A comprehensive solution is required, but this can lead to integration issues between hardware and software from different sources.



SERVOPRO NanoTrace DF-560E ULTRA




SERVOPRO NanoTrace DF-750 ULTRA



SERVOPRO NanoChrome ULTRA

Key solutions

Servomex provides a single-supplier solution for all UHP measurements in these applications. Our **SERVOPRO NanoTrace DF-560E** and **NanoTrace DF-750 ULTRA** oxygen and moisture analyzers offer the lowest detection limits available to the industry, while the multi-gas **SERVOPRO NanoChrome ULTRA** provides the other trace impurity measurements required. These can be seamlessly integrated into existing systems or supplied as a turnkey system designed to meet specific customer requirements.

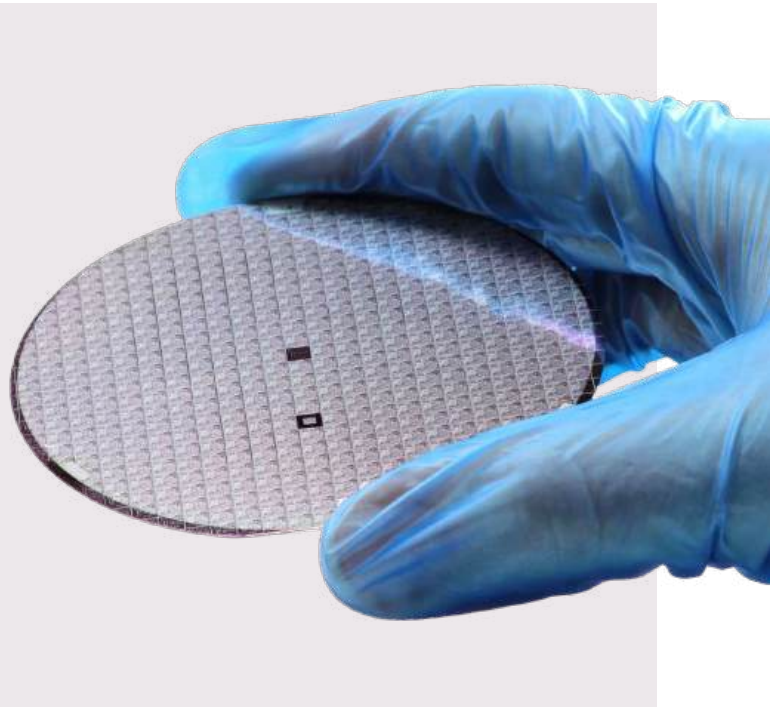

Watch our application video: servomex.com/uhp

The project

Servomex analyzers used for measuring oxygen in membrane-free water electrolyzers.

The challenge

With the global push to develop clean energy solutions for the future, hydrogen, as one of the world's most versatile natural gases, is important as a future clean energy source.

Electrolyzers, which use electricity to split water into hydrogen and oxygen, are a critical technology for producing low-emission hydrogen. Typically, an electrolyzer utilizes a membrane to separate the hydrogen and oxygen.

Green hydrogen technology and manufacturing group CPH2 has developed a unique technology that uses cryogenic separation to deliver pure hydrogen and pure oxygen. The benefits of the 1MW Membrane-Free Electrolyzer technology are the faster manufacturing process, the longer durability, which makes it more reliable, and the absence of precious metals such as Platinum, which makes it more cost-effective and sustainable.

The CPH2 electrolyzers are used to decarbonize energy systems, replacing diesel backup systems and using excess wind and solar energy to generate hydrogen to power equipment, machinery and transportation (forklift trucks, buses, airport ground support equipment).

The Servomex solution

CPH2 needed a robust, highly accurate analyzer that detects the impurity of oxygen in the hydrogen. The solution had to be tested and from a reliable and branded supplier to demonstrate the superiority of the technology.

With Servomex's long and proven history in measuring oxygen, the SERVOTOUGH OxyExact 2200 is the ideal solution to use to support the CPH2 technology.

This versatile oxygen analyzer was recommended to CPH2 by Servomex's channel partner, SGS, who recognized that the OxyExact would be an excellent addition to the electrolyzer being used in state-of-the-art green hydrogen production plant.

The SERVOTOUGH OxyExact 2200
This high-specification OxyExact 2200 O₂ analyzer offers an unrivalled combination of precision, flexibility and performance for optimum process and safety control.

Its class-leading specification for measuring oxygen in hydrogen makes it the ideal choice for use in electrolyzers as well as other demanding oxygen process monitoring and will enhance the efficiency and safety processes of the CPH2 technology.

The OxyExact 2200 is approved for the measurement of oxygen, including enriched oxygen (>21%), in hydrogen in hazardous areas, and can be configured with a hazardous area control unit with up to six transmitters.

SERVOTOUGH
OxyExact 2200




Industrial Process & Emissions (IP&E)

Servomex's IP&E division handles gas analysis solutions for applications in the power generation, hydrocarbon processing and emissions monitoring markets, including:

- Complete gas analysis for power processes
- Reliable HP application measurements
- Effective emissions monitoring solutions

Meet the team
online

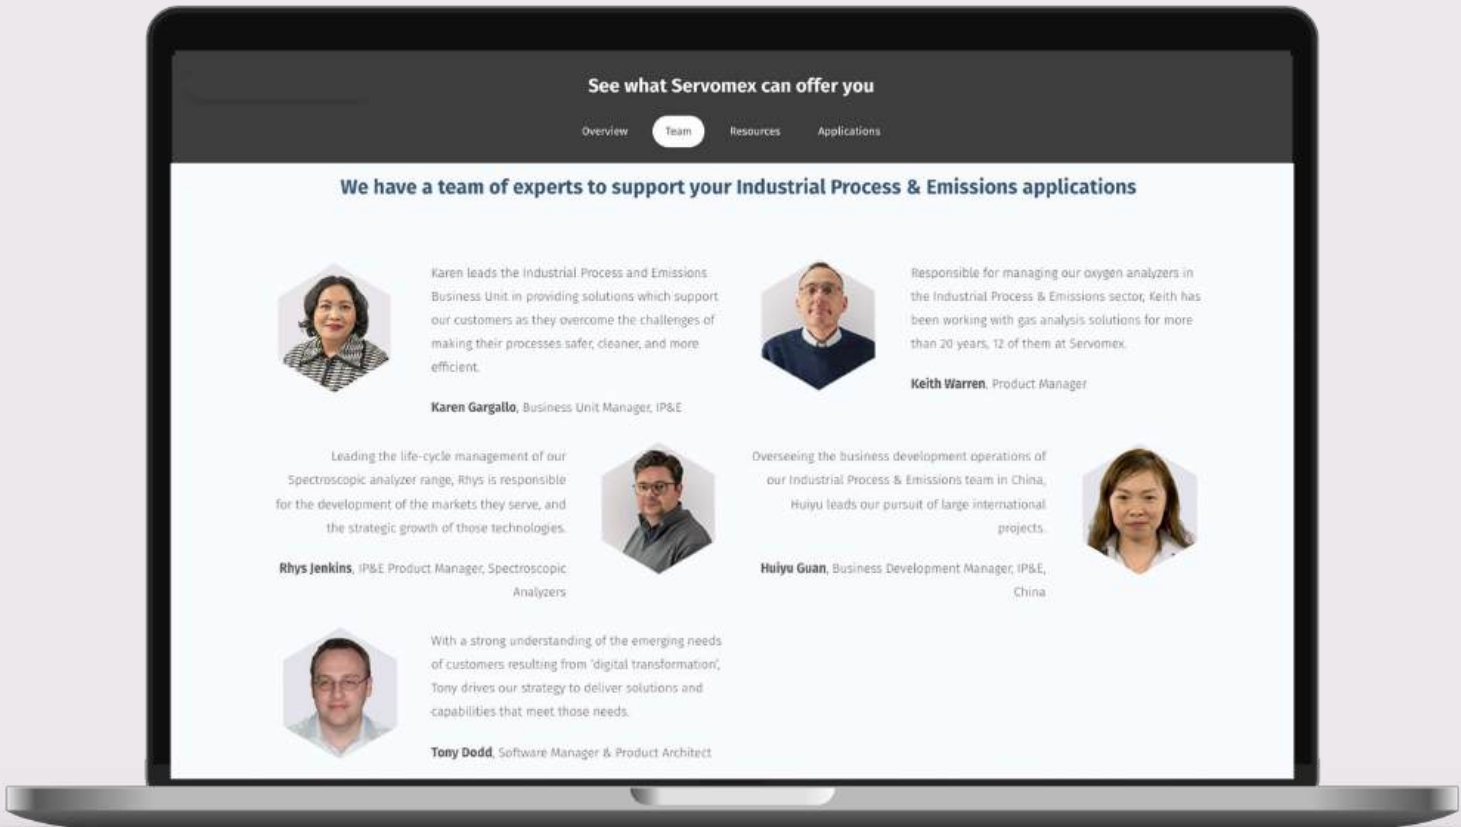

CLEAN AIR SOLUTIONS

Servomex helps a wide range of industries achieve their clean air goals, working to reduce emissions and mitigate the damage caused by harmful pollutants. As the global expert in gas analysis, we offer a three-phase strategy focusing on the key process areas.

PHASE ONE

COMBUSTION EFFICIENCY

Emissions of key pollutants, including NO_x, SO_x, carbon monoxide (CO) and carbon dioxide (CO₂), can be reduced by controlling this important process reaction. Accurate measurements of oxygen (O₂) and combustibles (CO_e) in the reaction mixture allow the optimum ratio between fuel and air to be achieved, lowering fuel consumption, and improving safety.

PHASE TWO

GAS CLEANING

A range of processes are available to safely remove harmful substances from process gases that might otherwise be emitted by the plant. Typical examples include DeNO_x treatments (i.e. ammonia slip processes) and flue gas desulfurization. A variety of gas measurements are required depending on the gas cleaning process being used.

PHASE THREE

EMISSIONS MONITORING

By measuring pollutants within the flue gas, plant operators can determine process efficiency, protect the environment, and demonstrate that they are compliant with regulations. Continuous monitoring is required to measure all the necessary components of the flue gas, including criterion pollutants and greenhouse gases.

Key solutions

PHASE ONE

SERVOTOUGH FluegasExact 2700: measures O₂ and CO_e in flue gases for improved combustion efficiency and reduced emissions.

SERVOTOUGH Laser 3 Plus Combustion: measures either O₂ or CO, and can be configured for a joint measurement of CO and CH₄ for safety.



SERVOTOUGH FluegasExact 2700



SERVOTOUGH Laser 3 Plus Combustion

PHASE TWO

SERVOTOUGH Laser 3 Plus Environmental: for ammonia slip, monitors NH₃ with an average signal across the duct, for accuracy despite uneven flow conditions.

SERVOPRO 4900 Multigas: for flue gas desulfurization, measures SO₂ in real-time, accurate to very low levels.

SERVOTOUGH SpectraExact 2500: for a range of demanding process applications, measures gases in flammable sample streams in hazardous areas.



SERVOTOUGH Laser 3 Plus Environmental



SERVOTOUGH SpectraExact 2500

PHASE THREE

SERVOPRO 4900 Multigas: for continuous emissions monitoring, can monitor four gas streams simultaneously, measuring from a choice of O₂, CO₂, CO, SO₂, NO, CH₄ and N₂O.

SERVOPRO NO_x: uses non-depleting Chemiluminescence detection technology to measure NO or NO/NO₂/NO_x concentrations.



SERVOPRO 4900 Multigas



Watch our application video: servomex.com/cleanair

Pre-combustion carbon capture


Collecting carbon dioxide (CO₂) emissions from power plants and heavy industry through carbon capture and storage (CCS) technologies helps to reduce the amount of CO₂ that enters the atmosphere.

Pre-combustion capture removes CO₂ before the combustion of the fuel, and requires a carbonaceous fuel to be broken down into hydrogen (H₂) and carbon monoxide (CO), a mixture known as syngas.

For high-efficiency CO₂ capture, the syngas has to be 'shifted' after it is cleaned, yielding heat and a gas stream with high CO₂ and H₂ concentrations.

The CO₂ can then be removed with chemical and physical solvents, adsorbents, and membranes. CO₂ traces can be present in the H₂ stream.

Other applications, for example H₂, NH₃ and synthetic fuel production have been using the same technology that captures CO₂ from the syngas generated in a gasifier for decades. In addition, the reforming and partial oxidation of natural gas are already widely applied, for example in the production of H₂ in the NH₃ production process.

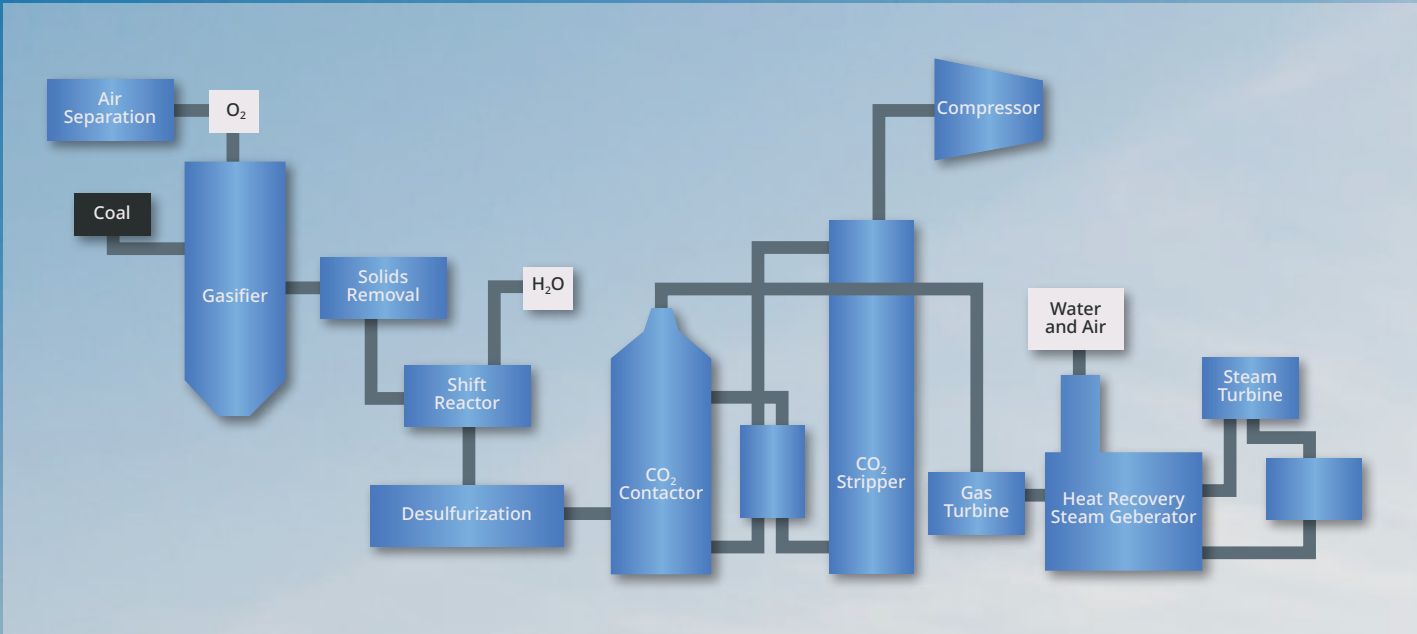

Process measuring points

Installation location	Gas measured	Measuring range	Application	Servomex analyzer
Flue gas to stack	CO ₂ NOx O ₂ SO ₂	5/10% 500 ppm 25% 100/2,000 ppm	Emissions	SERVOPRO 4900 Multigas
CO ₂ stream to storage (product)	CO ₂ CO SO ₂	100% 300-4,000 ppm 100 ppm	Quality	SERVOTOUGH SpectraExact 2500
Pipeline/ temporary storage	CO ₂ H ₂ O O ₂	4% 70 ppm 21%	Safety	SERVOTOUGH SpectraExact 2500 SERVOTOUGH Oxy 1900 SERVOPRO DF-745 SGMax SERVOPRO AquaXact 1688 SERVOPRO MultiExact 4100
CO ₂ storage	CO ₂ O ₂	4% 21%	Safety	SERVOTOUGH SpectraExact 2500 SERVOTOUGH Oxy 1900 SERVOPRO MultiExact 4100



Watch our application video: servomex.com/ccs

Oxyfuel combustion carbon capture


Based on denitrification of the combustion medium, oxyfuel combustion sees the nitrogen (N₂) removed from the air through a cryogenic air separation unit (ASU) or with the use of membranes.

This means that combustion takes place with almost pure oxygen (O₂), so the resultant flue gas contains mainly carbon dioxide (CO₂) and water.

Trace components like oxides of nitrogen (NO_x) and sulfur dioxide (SO₂) may be present. The CO₂ is purified by removing water and impurities.

Remaining small amounts of N₂, O₂ and argon are vented off, though they may contain traces of CO₂. The production of O₂ requires a significant amount of energy, which results in a reduction of the efficiency of

the power plant. Further, the purification and the compression of the CO₂ stream also requires energy. The combustion with O₂ is currently applied in the glass and metallurgical industry. Oxyfuel combustion for steam and power production using solid fuels has been at present only proven in test and pilot facilities. Oxyfuel combustion can also be applied in natural gas-fired concepts.

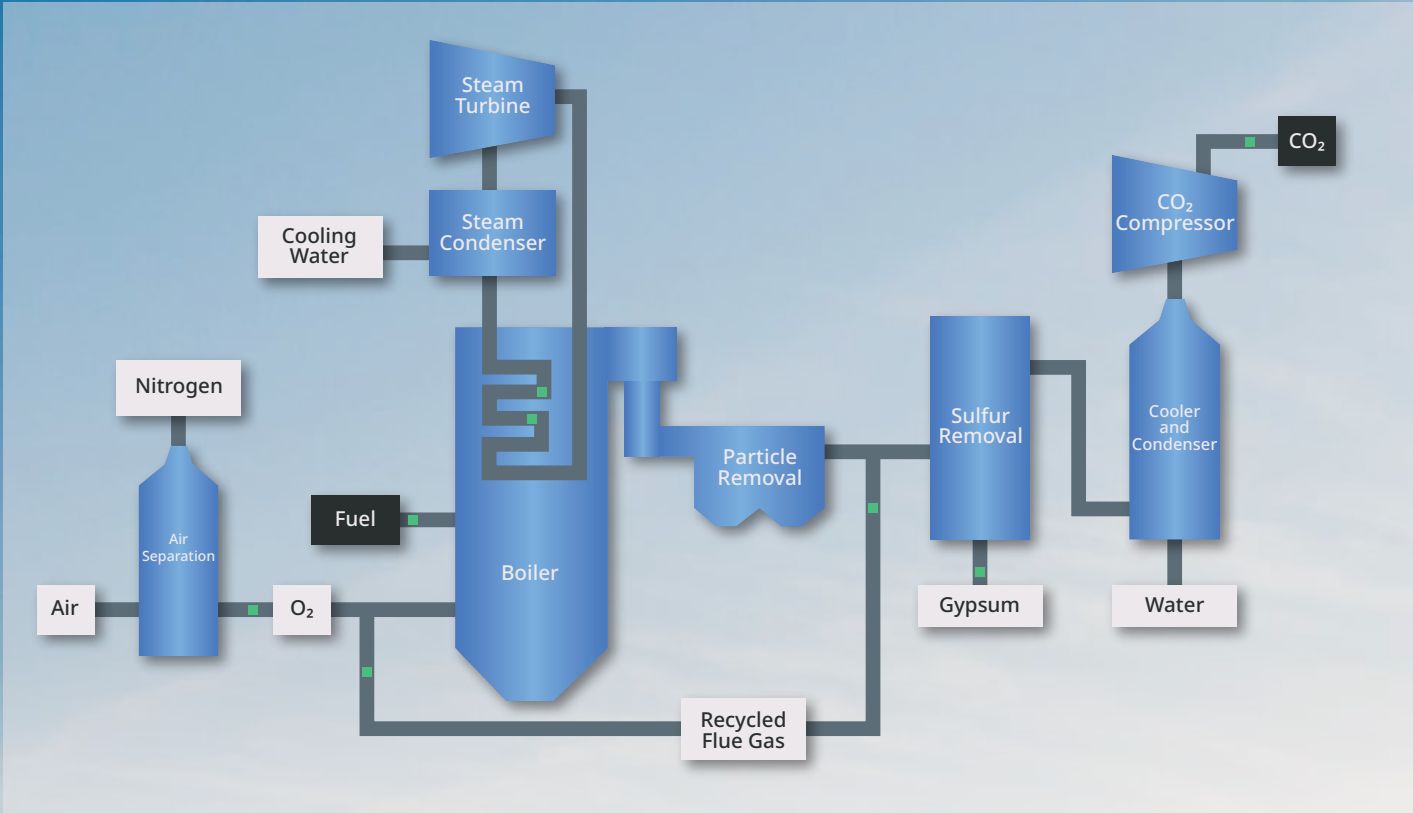

Process measuring points

Installation location	Gas measured	Measuring range	Application	Servomex analyzer
O ₂ stream (ASU)	O ₂	100%	Quality	SERVOTOUGH OxyExact 2200 SERVOPRO MultiExact 4100
Combustion control	CO O ₂	1000 ppm 50%	Process control	SERVOTOUGH Laser 3 Plus SERVOTOUGH FluegasExact 2700 (modified)
Flue gas	CO ₂ CO NO _x O ₂ SO ₂	80% 500/3,000 ppm 500 ppm 25% 100/2,000 ppm	Emissions	SERVOPRO 4900 Multigas
CO ₂ stream outlet cooler (product)	CO ₂ SO ₂ H ₂ O O ₂	100% 100 ppm 70 ppm 5%	Quality	SERVOTOUGH SpectraExact 2500 SERVOPRO MultiExact 4100 SERVOPRO DF-745 SGMax SERVOPRO AquaXact 1688
Pipeline/temporary storage	CO ₂ H ₂ O O ₂ NH ₃	4% 70 ppm 21% 10 ppm	Safety	SERVOTOUGH SpectraExact 2500 SERVOTOUGH Laser 3 Plus SERVOPRO DF-745 SGMax SERVOPRO AquaXact 1688 SERVOPRO MultiExact 4100 SERVOTOUGH Oxy 1900



Listen to our podcast: servomex.com/ccs

Post-combustion carbon capture


Carbon dioxide (CO₂) resulting from a combustion process can be captured from the flue gas. This flue gas may come from any pressurized combustion in a boiler, gas turbine, or industrial process yielding CO₂.

A flue gas cleaning process removes trace components like sulfur dioxide (SO₂) and hydrogen chloride (HCl) to prevent malfunctioning of the capture process.

Various capture mechanisms, or combinations of them can be applied, including phase separation, selective permeability, and sorption (the most common mechanism at large point sources).

After CO₂ is captured from the flue gas, the inert gases, for example nitrogen (N₂), oxygen (O₂) and argon (Ar) in the flue gas are vented to the atmosphere. Traces of CO₂ will be present in the vented gas due to the efficiency of the capture process being less than 100%.

Research, design and development in post-combustion capture is focused on reducing energy requirement and capital cost through developing and adapting solvents, optimizing the required process installations, and integrating the capture system within the process.

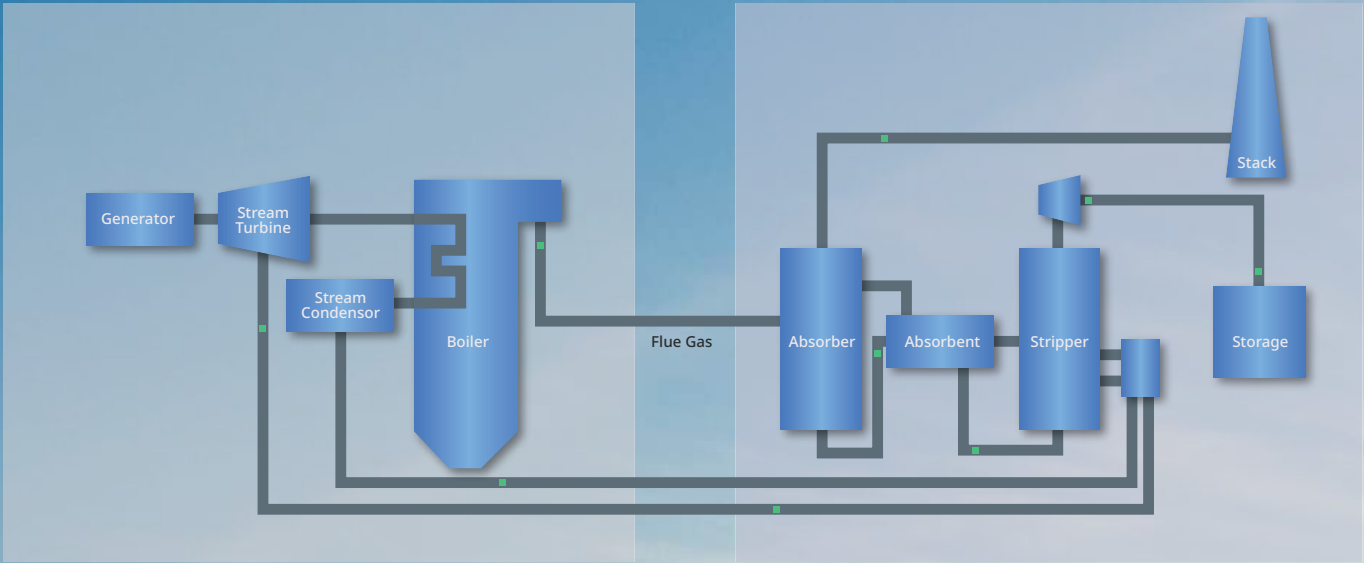

THERMAL POWER PLANT

CO₂ CAPTURE TECHNOLOGY

Process measuring points

Installation location	Gas measured	Measuring range	Application	Servomex analyzer
Flue gas from power plant	CO ₂ CO NO _x O ₂ SO ₂ H ₂ O	20% 500/3,000 ppm 500/3,000 ppm 25% 100/2,000 ppm 30%	Emissions	SERVOPRO 4900 Multigas SERVOTOUGH SpectraExact 2500
CO ₂ stream capture/product	CO ₂ SO ₂ H ₂ O	100% 100 ppm 70 ppm	Quality	SERVOTOUGH SpectraExact 2500 SERVOPRO MultiExact 4100 SERVOPRO DF-745 SGMax SERVOPRO AquaXact 1688
Lean absorbent stream from CO ₂ stripper	CO ₂ (slip)	1%/10%	Process control	SERVOTOUGH SpectraExact 2500 SERVOPRO MultiExact 4100
Pipeline/temporary storage	CO ₂ H ₂ O O ₂ NH ₃	4% 70 ppm 21% 10 ppm	Safety	SERVOTOUGH SpectraExact 2500 SERVOTOUGH Laser 3 Plus SERVOPRO MultiExact 4100 SERVOPRO DF-745 SGMax SERVOPRO AquaXact 1688
Flue gas to stack	CO ₂ CO NO _x O ₂ SO ₂	5% 100/1,000 ppm 500 ppm 25% 100/2,000 ppm	Emissions	SERVOPRO 4900 Multigas
CO ₂ storage	CO ₂ O ₂	4% 21%	Safety	SERVOTOUGH SpectraExact 2500 SERVOTOUGH Oxy 1900 SERVOPRO MultiExact 4100



Watch our application video: servomex.com/ccs



Direct reduction iron (DRI)

DRI plants are able to operate at the highest levels of efficiency, while achieving low emissions targets, with the assistance of accurate gas measurements.

The Midrex DRI process is a low-carbon-dioxide-emission application in steelmaking using virgin iron ore in an electric arc furnace.

The iron ore is heated as it descends through a shaft furnace, and oxygen (O₂) is removed from the ore using counterflowing gases with a high hydrogen and carbon monoxide content. Accurate gas monitoring during this process ensures efficient operation.

The reaction between the counterflow gases and iron oxide in the ore produces metallic iron, water vapor, and carbon dioxide (CO₂), so emissions monitoring is also important. Oxides of nitrogen (NOx) may be generated by the process; these must be continuously monitored to ensure environmental compliance.

Key solutions

The **SERVOTOUGH Oxy 1900** provides essential O₂ monitoring in the DRI process. This industry-leading Paramagnetic O₂ analyzer is designed for hazardous areas. It is supported by the highly flexible **SERVOTOUGH SpectraExact 2500** photometric analyzer for the other measurements. The **SERVOPRO 4900 Multigas** analyzer provides the required continuous emissions monitoring.



SERVOTOUGH
Oxy 1900



SERVOTOUGH
SpectraExact 2500



SERVOPRO
4900 Multigas



Watch our application video: servomex.com/dri



Ethylene production

The safe and efficient operation of ethylene plants is supported by rapid, accurate gas analysis, which brings control and confidence to every process point.

Ethylene production plants require reliable monitoring of process gases, while feed gas quality is also critical to

the overall process. It is also vital to ensure a high product yield by controlling gas quality throughout the process.

Failure to monitor the gas feed throughout the process can significantly reduce efficiency.

A less pure gas results in a lower ethylene yield once the cracked gas is quenched and cleaned.

There are also issues for safety and emissions if high levels of contaminants enter the wrong part of the process.

Accurate, reliable analysis of process gases

O₂

CO


CO₂

SO_x




SERVOTOUGH SpectraExact 2500

The Ethylene production process

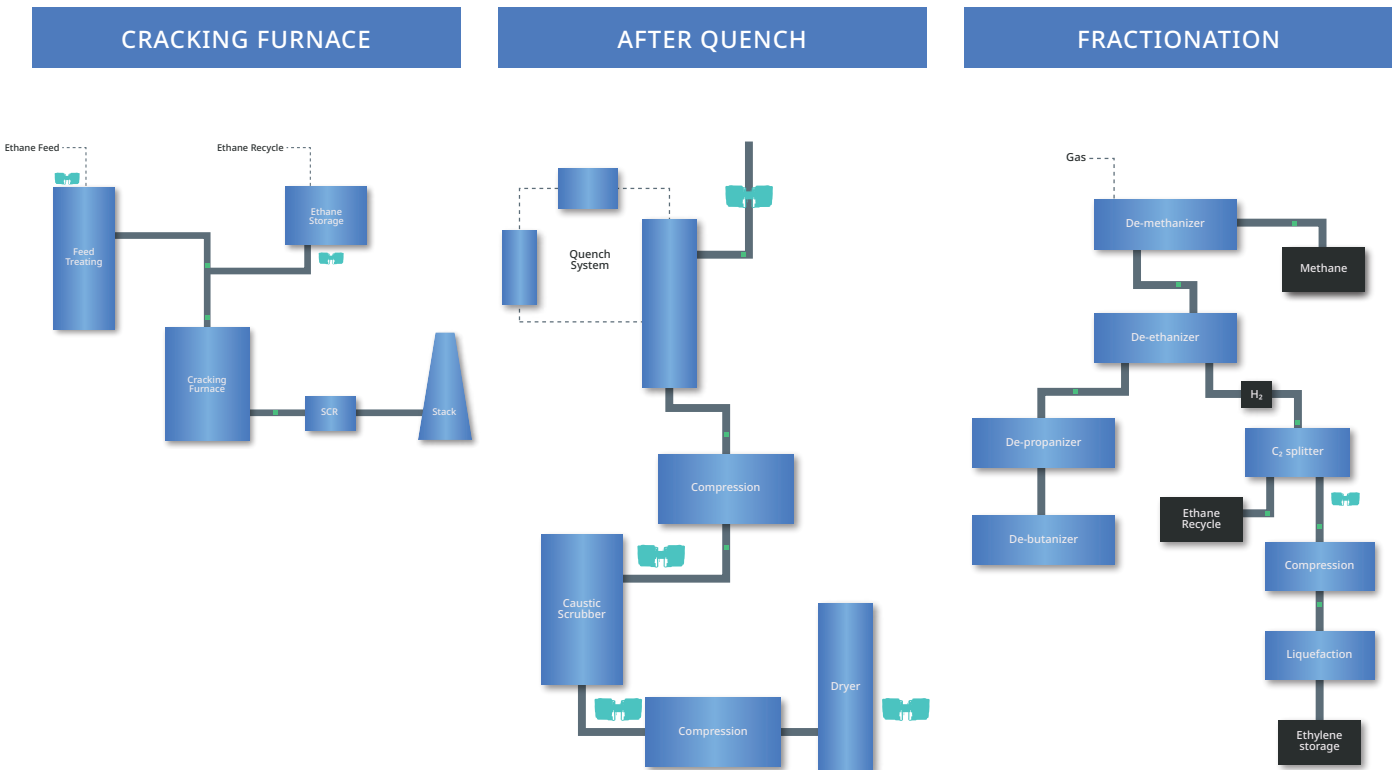

Key solutions

The **SERVOTOUGH SpectraExact 2500** analyzer provides the accurate gas quality monitoring at many points throughout the ethylene process. This allows optimization of the process reactions to ensure greater efficiency, delivering a higher yield and better-quality product. We also supply analytical solutions for safety, combustion control and emissions monitoring.

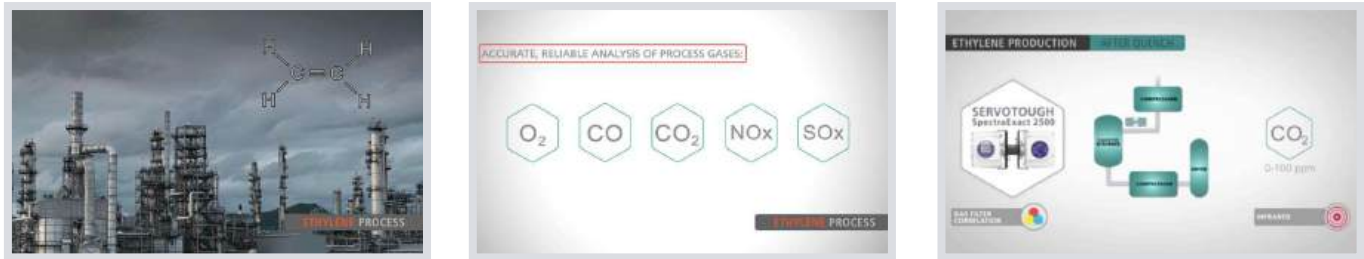

Watch our application video: servomex.com/ep




Ethylene dichloride production

The predominant global method for PVC production is the ethylene-based route, using ethylene dichloride (EDC) as an intermediate. EDC production requires gas analysis at several points, for process control and quality monitoring. A variety of technologies are needed to measure the range of gas components within the process.

Gas analyzer systems must overcome challenging process conditions, including condensation and corrosion. Large amounts of hydrogen chloride, EDC and residual water can increase the corrosion damage, so a resilient analyzer that can make accurate moisture measurements in the EDC stream is required.

The Ethylene Dichloride production process

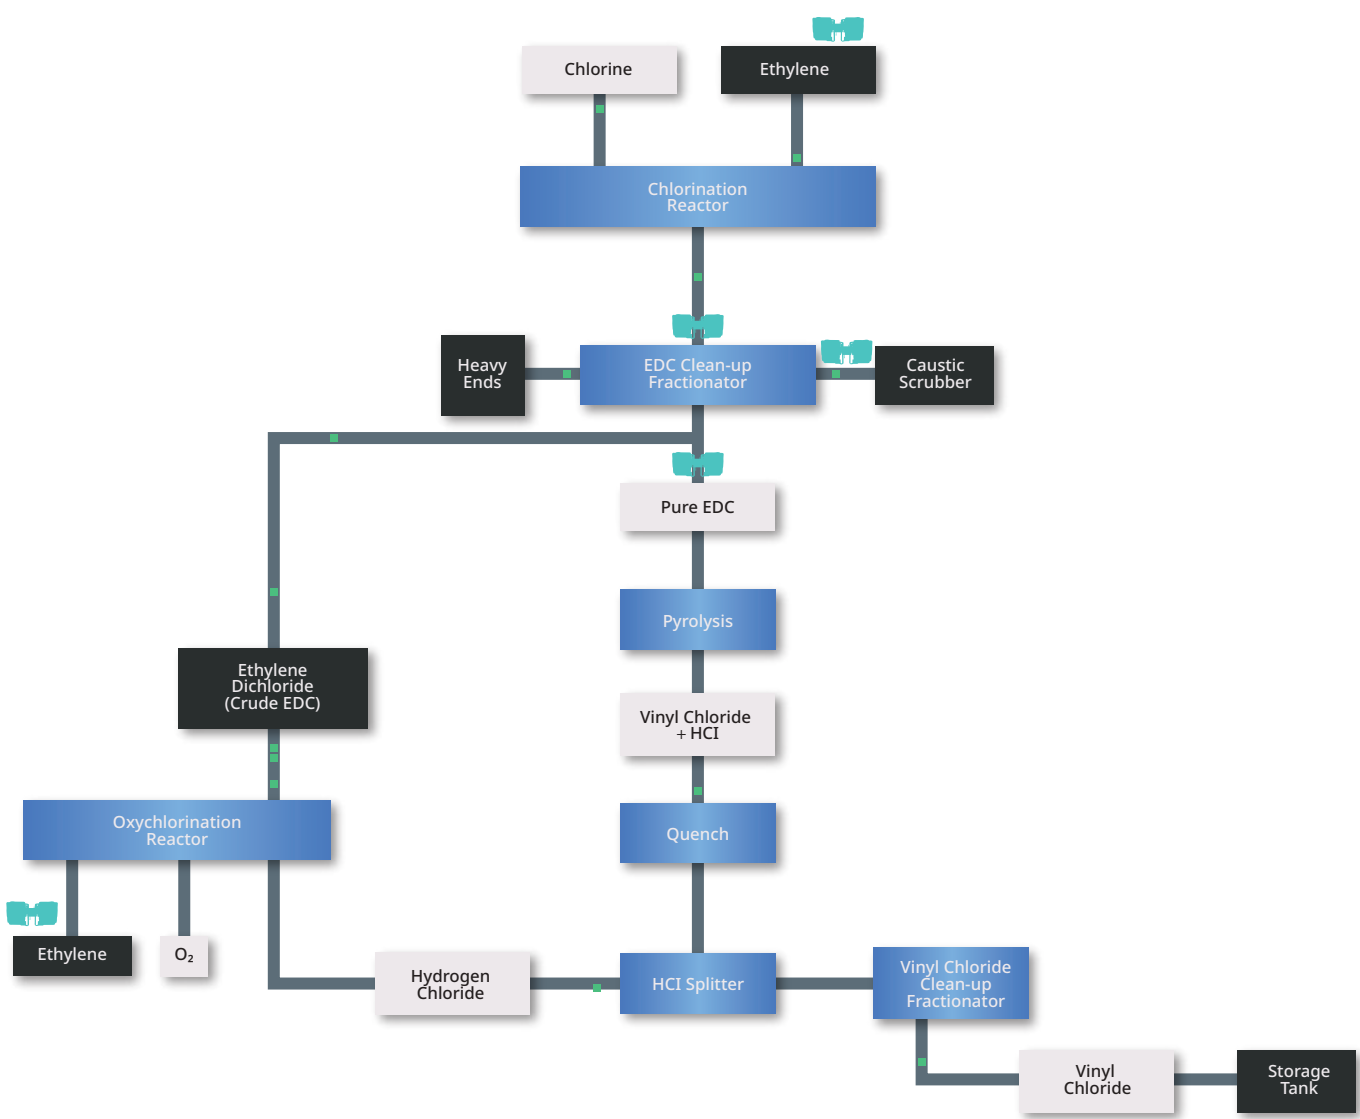


Key solutions

Our rugged, highly flexible **SERVOTOUGH SpectraExact 2500** photometric gas analyzer delivers many of the key measurements required in the EDC process, including residual water levels in the EDC stream. Capable of single and multi-component analysis, it can also be used to monitor ethylene, sodium hydroxide, and hydrogen chloride in the EDC production process.



SERVOTOUGH SpectraExact 2500

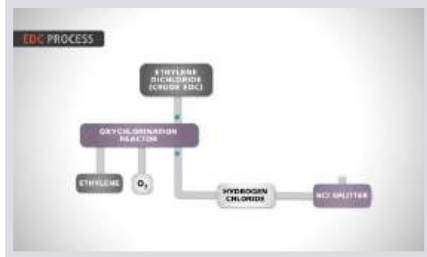

Watch our application video: servomex.com/edc



Ethylene oxide production

Ethylene oxide (EO) is a versatile chemical building block. Its production relies on precise gas analysis measurements to ensure process safety and high productivity.

EO is formed in a reaction between oxygen and ethylene. Highly accurate monitoring of oxygen levels is required to protect the process against the risk of explosion. To support efficiency, quality and process control measurements are also made.

Safety is an essential concern, especially around the process reactors where hazardous flammable samples containing ethylene, oxygen, ethylene oxide and methane may be present.




SERVOTOUGH
OxyExact 2200

Key solutions

To provide safety-critical oxygen analysis, Servomex supplies a dual or triple-redundancy gas analysis system using **SERVOTOUGH OxyExact 2200** analyzers. Specifically designed for hazardous area operation, these Paramagnetic analyzers deliver the accurate, reliable measurements needed as part of a Safety Integrated System (SIS).

The Ethylene Oxide production process

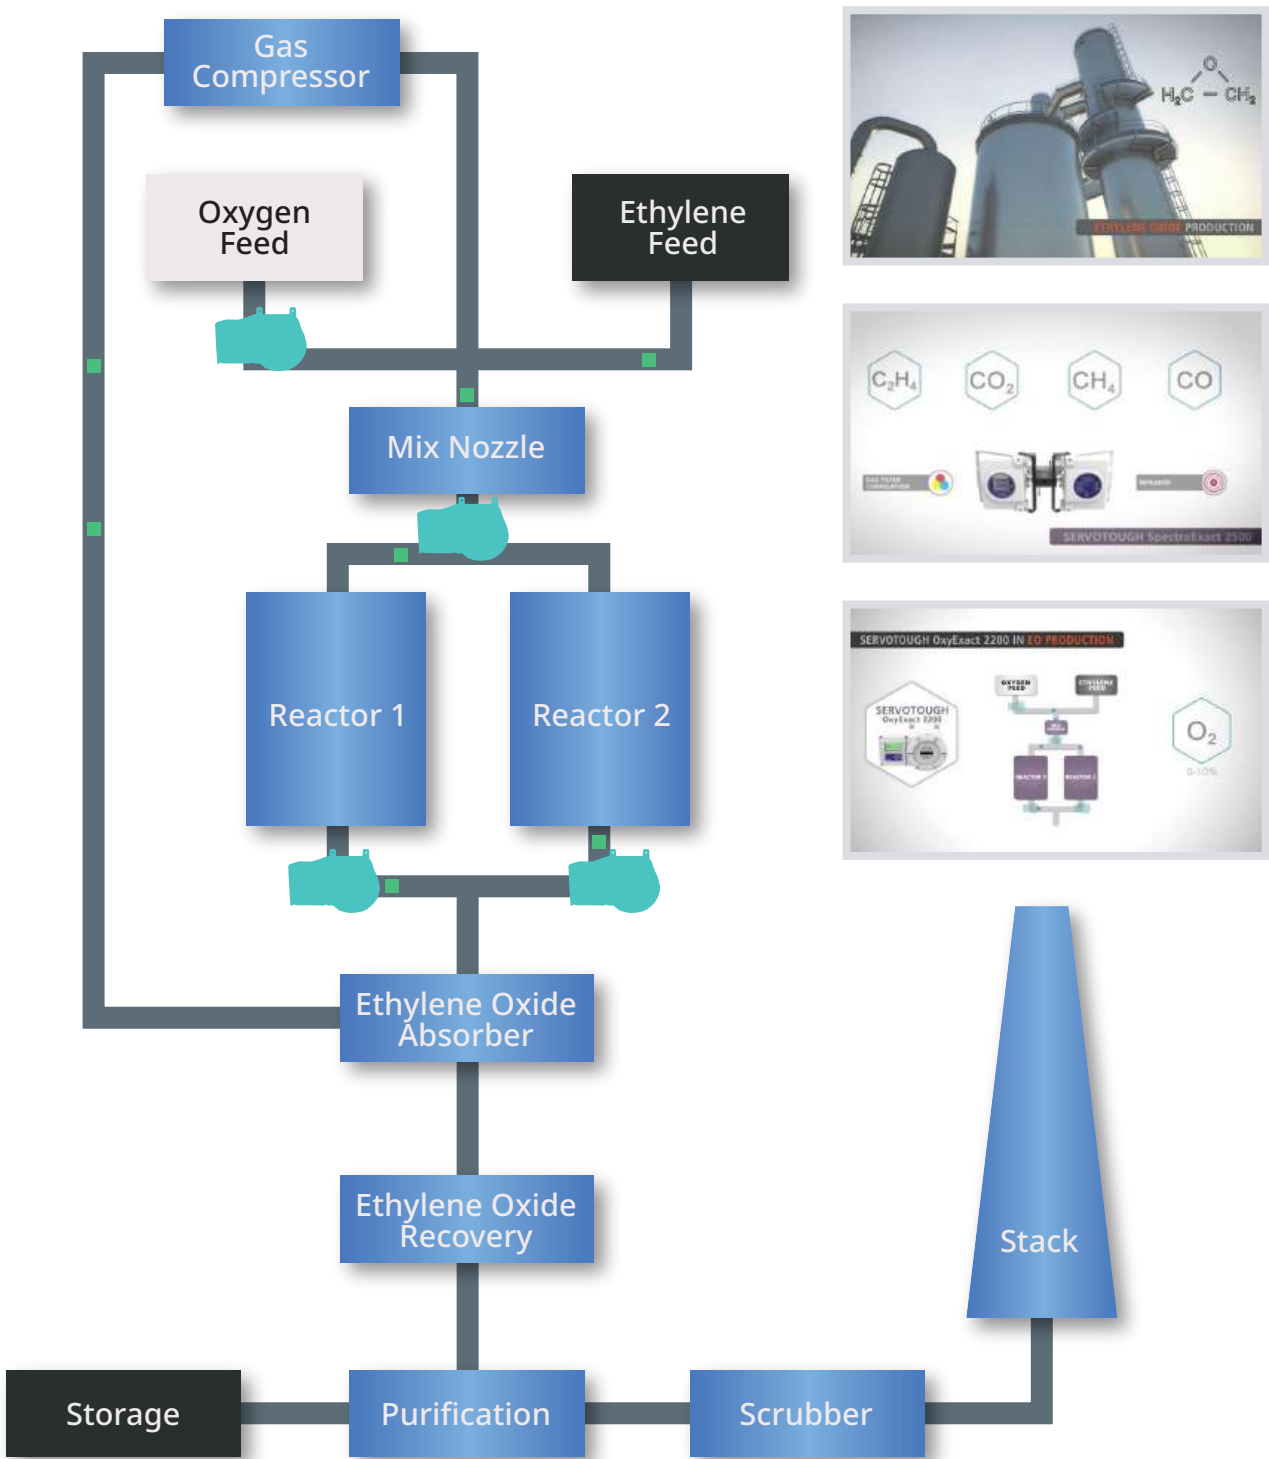

Watch our application video: servomex.com/eo




HyCO and hydrogen production

HyCO is a synthetic fuel consisting of hydrogen and carbon monoxide. Also known as syngas, it is most commonly made by converting natural gas in a steam reformer into a mixture of H₂ and CO.

To obtain hydrogen for fuel, the CO is further converted into H₂ and CO₂ in water-shift reactors, then the CO₂ is removed via absorption or carbon capture. When manufacturing hydrogen, a high-quality gas analysis system improves process control, increases safety, monitors emissions, and optimizes product quality.

Alongside product quality measurements for the hydrogen and carbon monoxide gases produced, safety and control measurements are required to monitor levels of oxygen, carbon dioxide, methane, total hydrocarbons, and trace moisture, as well as monitor feedstock and combustion processes.

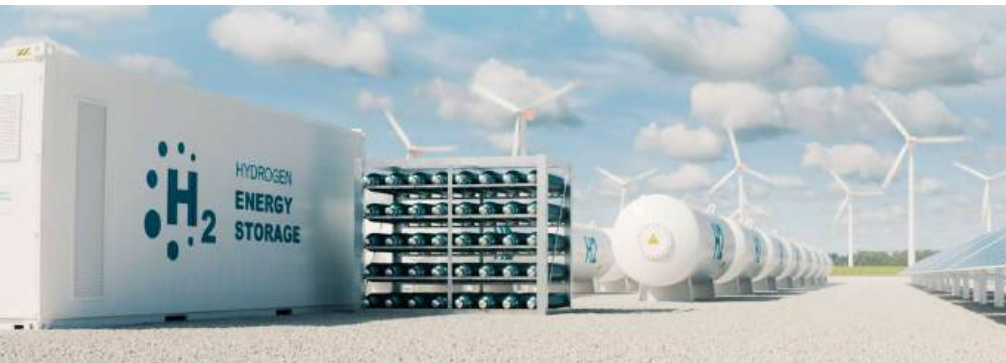

SERVOPRO
MultiExact 4200

Key solutions

Depending on the manufacturing method, the most common contaminants in hydrogen production will be O₂, CO, and CO₂. All three of these can be monitored by the **SERVOPRO MultiExact 4200**, Servomex's multi-component analyzer, using a combination of Paramagnetic and Gas Filter Correlation sensing.

The **MultiExact 4200** can measure up to four gas streams simultaneously, providing high-specification, multi-gas analysis of trace contaminants and flammable gas samples. The analyzer can also be configured to measure ppm-level CO, CO₂, CH₄, and N₂O.



Find out more: servomex.com/4200



Marine vapor control

The systems used to monitor marine vapors are controlled by strict regulations which govern the performance levels of the analyzer and its suitability to the hazardous environment. Analyzers used in these systems must be approved by the relevant regulatory body.

The vapors produced during loading are either returned to the plant and used for fuel or raw materials, or taken to a safe area and incinerated. In either case, it is essential to monitor the return lines for air ingress, in order to prevent explosive conditions from occurring.




SERVOTOUGH
Oxy 1900



SERVOTOUGH
OxyExact 2200

The Marine vapor control process

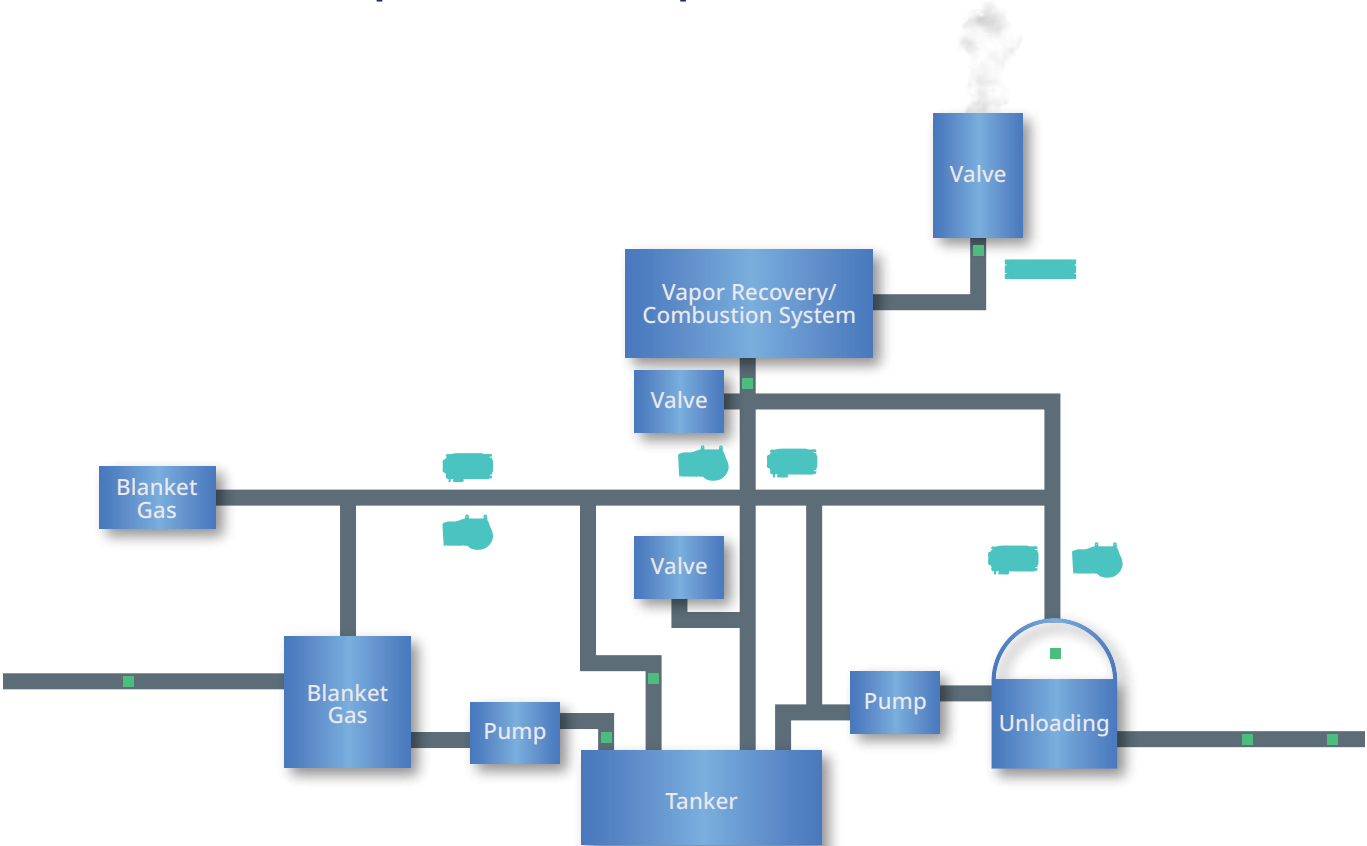

Key solutions

At least two Paramagnetic oxygen analyzers are specified by the regulations for this application, to ensure redundancy within each system. Our proven solution uses either the **SERVOTOUGH Oxy 1900** or **SERVOTOUGH OxyExact 2200** analyzers, depending on application conditions. Both offer the enhanced reliability of non-depleting sensor technology, and are approved by regulatory bodies.



Watch our application video: servomex.com/mvc



Process heaters and furnaces

Process heaters and furnaces allow fuel and air to react together, producing extremely high gas temperatures. They use large quantities of fuel, generate emissions, and can create a safety hazard for plant and personnel alike.

The key to controlling combustion in process heaters and furnaces is the optimization of the air-to-fuel ratio. Using excess oxygen (air) leads to cooler burning, significantly reducing efficiency and increasing emissions. However, a low-oxygen, fuel-rich situation is a potential source of explosions.

Keeping the combustion reaction at the optimum point ensures safe operation while reducing both fuel costs and emissions.



SERVOTOUGH
FluegasExact 2700



SERVOTOUGH
Laser 3 Plus Combustion


The Process heater measuring points



SERVOTOUGH
FluegasExact 2700

O₂

COe

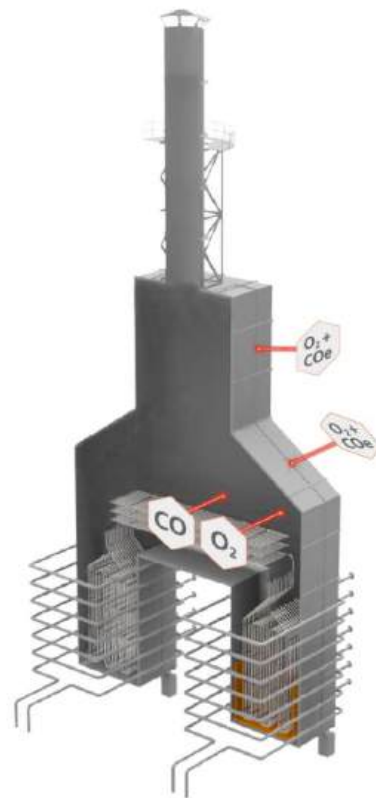


SERVOTOUGH
Laser 3 Plus Combustion

O₂

CO

Key solutions

Using close-coupled extractive sampling, the **SERVOTOUGH FluegasExact 2700** combines proven Zirconia sensing for oxygen and Thick Film Catalytic sensing for combustibles, delivering an effective solution in a single analyzer. The **SERVOTOUGH Laser 3 Plus Combustion** uses Tunable Diode Laser (TDL) technology for in-situ measurements of oxygen, carbon monoxide, or both carbon monoxide and methane. This provides an average measurement across the flue, and is especially effective in supporting safety.

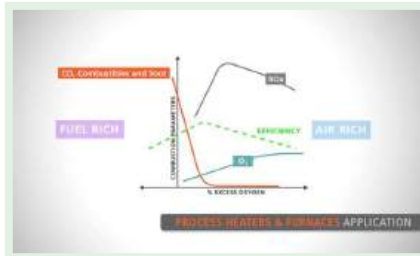

Watch our application video: servomex.com/process-heaters




Propylene oxide (PO) production

An important intermediate for the manufacture of propylene glycol, PO can be used as an antifreeze agent or to create polyurethane plastics.

It can be manufactured through hydrochlorination – converting propene to propylene chlorohydrin and then dechlorinating. More commonly, it is made through the oxidation of propylene with an organic peroxide. Both methods require gas analysis for safety and quality control.

Manufacturing propylene oxide through the oxidation process requires oxygen levels to be monitored in the oxidation reactor for quality and safety. This analysis must be performed under hazardous conditions, since propylene oxide is volatile and highly flammable.

The Propylene oxide production process

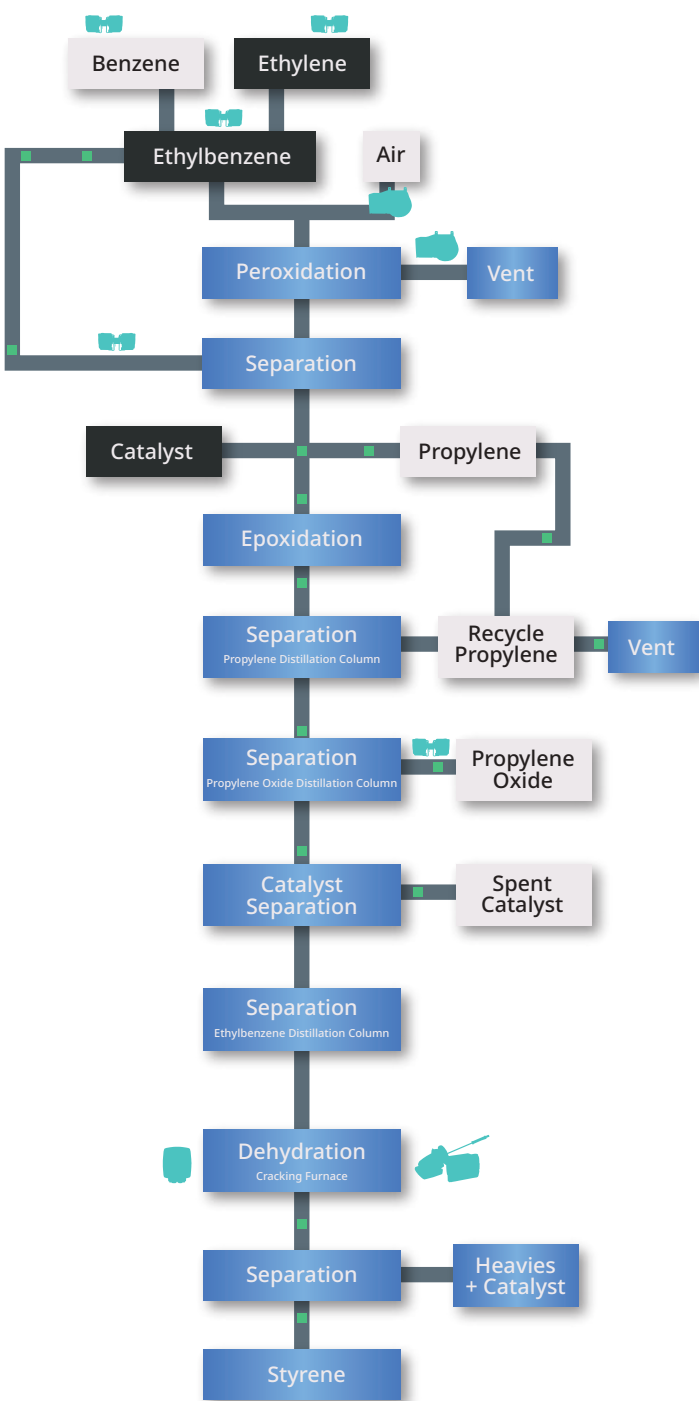


Key solutions

The **SERVOTOUGH Oxy 1900** delivers accurate measurements of oxygen in the oxidation reactor. This hazardous area device provides safety-enhanced oxygen analysis, using stable, non-depleting Paramagnetic sensing technology. A heated sample compartment provides unrivalled stability and simplified sampling.



SERVOTOUGH
Oxy 1900

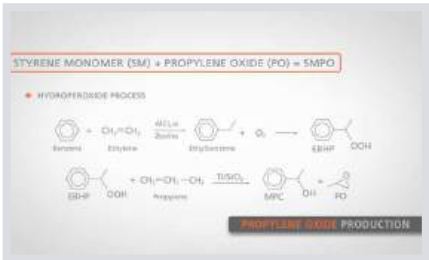

Watch our application video: servomex.com/po



Purified terephthalic acid (PTA) production

The production of PTA relies upon expert gas analysis to ensure process control, efficiency and safety, as well as quality monitoring and environmental compliance.


In order to maintain safety and support productivity, oxygen (O₂) analysis is critical.

Additionally, some operators use an oxygen enrichment process on their PTA plants, which requires a specialist O₂ monitoring solution for both safety and efficiency.

The enriched oxygen process involves adding O₂ to the air being fed to the reactors,

ensuring a more efficient reaction, reducing catalyst consumption, and improving reactor performance. To keep O₂ concentration at the most efficient level, while ensuring it does not exceed safe levels, reliable and accurate monitoring is required.

The Purified terephthalic acid production process

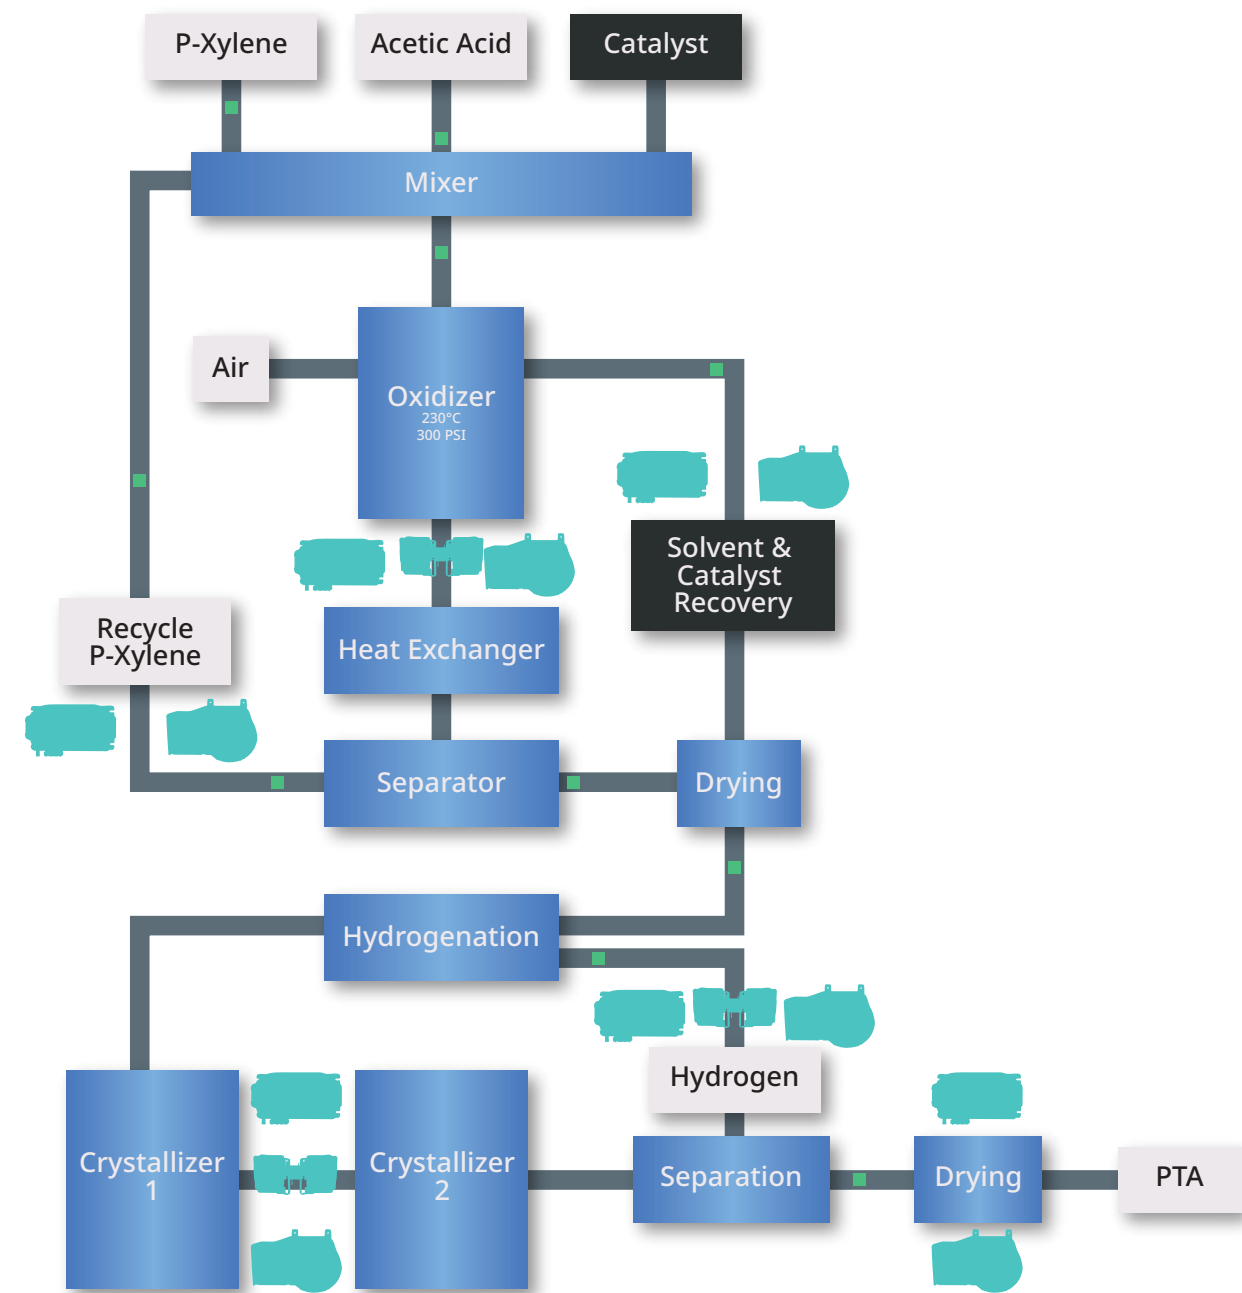

Watch our application video: servomex.com/pta



SERVOTOUGH
OxyExact 2200

Key solutions

Servomex's **SERVOTOUGH OxyExact 2200** high-specification Paramagnetic oxygen analyzer is able to operate effectively and reliably in hazardous environments. It has a resilient enclosure for the transmitter unit, providing an effective solution for this application.




Thermal power – coal

In coal-fired power generation, pre-heated air and pulverized coal are fed into the boiler where combustion takes place. This is a demanding industry which requires operators to deliver the most efficient process while maintaining safe operation, controlling fuel costs and meeting stringent targets for emissions.

To ensure complete combustion, excess air is needed. However, if this excess is too high, combustion efficiency will fall through heat loss, while if the process is run with excess fuel, not all the fuel will be burnt. Precise monitoring and control of flue gas in the process is essential to optimize combustion efficiency, which will minimize fuel costs and reduce harmful emissions.

Combustion process

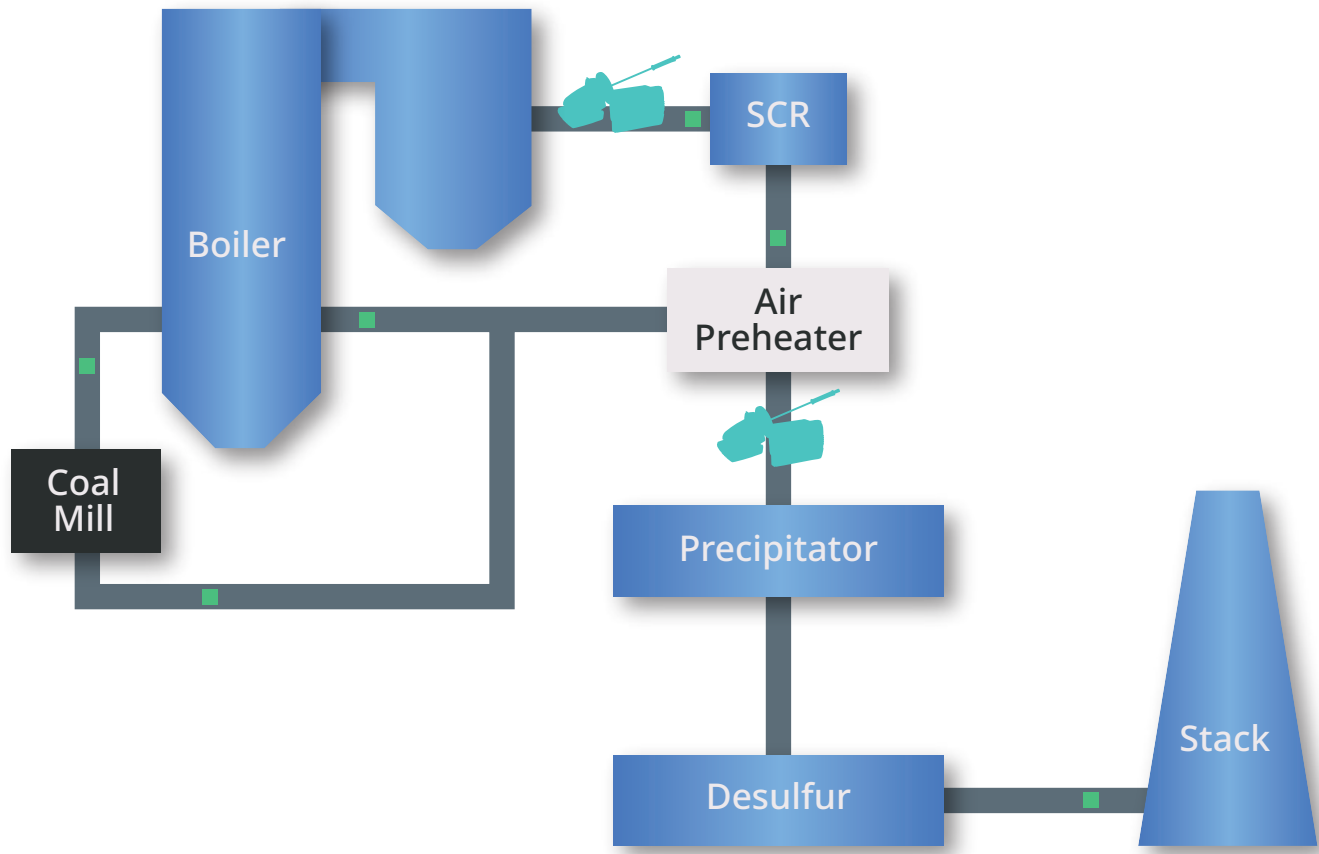


Key solutions

Our **SERVOTOUGH FluegasExact 2700** combustion analyzer continuously monitors oxygen and combustibles in the flue gas, enabling operators to achieve optimum combustion conditions. This helps to reduce carbon and NOx emissions, improve process safety, and save fuel – the FluegasExact 2700 has been proven to cut fuel costs by up to 4%.



SERVOTOUGH
FluegasExact 2700

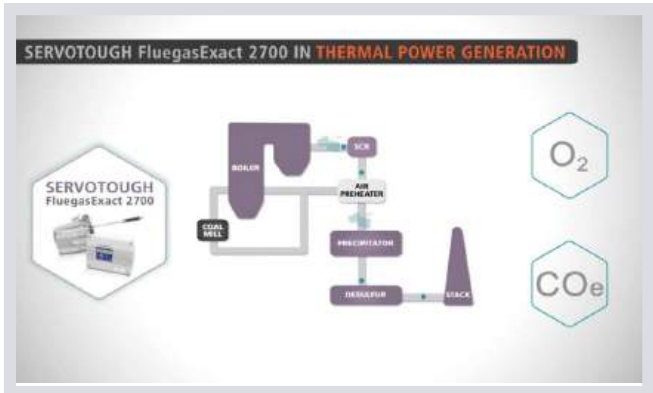

Watch our application video: servomex.com/thermal-power



Vinyl chloride monomer (VCM) production

An important intermediate product for the production of polyvinyl chloride (PVC), VCM is created by reacting hydrogen and chlorine (Cl₂) together to form hydrogen chloride (HCl). This in turn is combined with acetylene to produce VCM.

Gas analysis measurements are required across the process, including monitoring moisture in the Cl₂ stream to avoid compressor corrosion, safety measurements for both HCl and Cl₂, and oxygen measurements in the acetylene stream.

The gas analysis equipment used in this process can be affected by the challenging process conditions, such as condensation and corrosion. The analytical systems used must not only deliver reliable measurements for process control and safety, but be able to do so without being impaired by the conditions themselves.




SERVOTOUGH SpectraExact 2500

Key solutions

The rugged **SERVOTOUGH SpectraExact 2500** accurately provides single and multi-component analysis at key process points, including measurements for moisture in Cl₂ to protect the compressor from corrosion damage. It can also make the necessary measurements for HCl and Cl₂ concentrations between the HCl reactor and preheater stages of the process.

The VCM production process

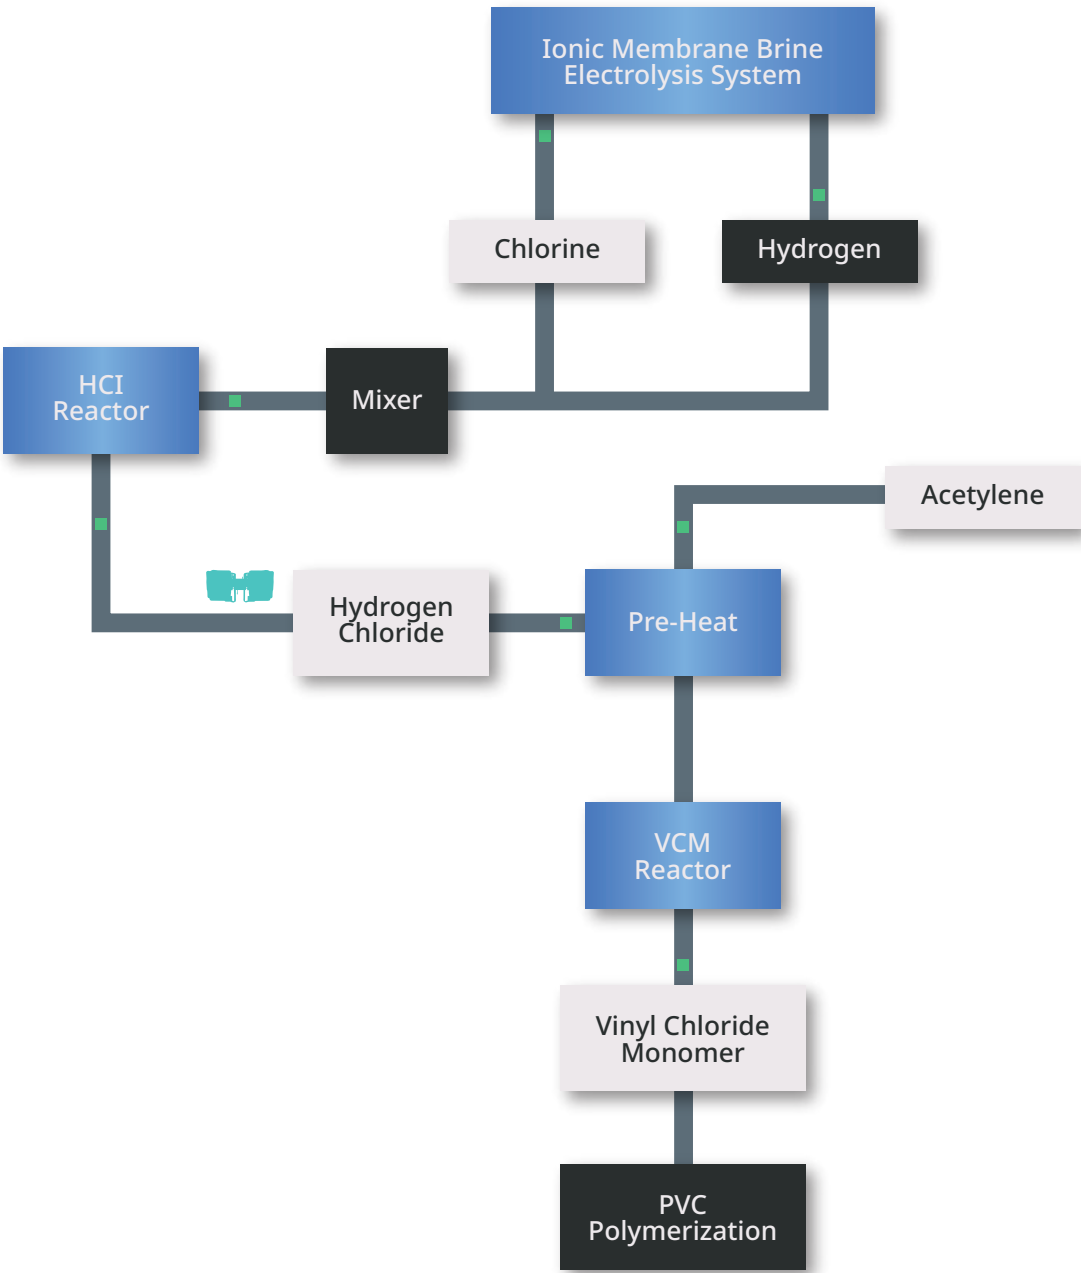

Watch our application video: servomex.com/vcm

Hummingbird

Performance in partnership

Servomex's dedicated sensing technology brand, Hummingbird is the expert in sensor technology for industrial and medical OEM partners. It manufactures innovative, reliable products using cutting-edge techniques, bringing easy integration and superior performance to your devices.

Since its formation in 2011, Hummingbird has developed world-leading technologies that redefine gas sensor performance, powering Servomex's industry-leading gas analysis range, and providing custom solutions for OEMs.

Customers include major producers of equipment such as critical care medical devices, gas analyzers for industrial applications, research instruments and deep-sea diving analysis.



Award-winning solutions



Hummingbird Sensing Technology is a proud two-time winner of the Queen's Award for Enterprise.

In 2022, Hummingbird won in the International Trade category, after demonstrating significant growth over a six-year period.

Part of this growth was attributed to the ways in which Hummingbird responded to the COVID-19 pandemic in order to meet a surge in demand for its sensors. Methods were developed to increase productivity to meet heavy demand from partners in the healthcare market as the global need for critical care ventilators soared.

A new, faster-to-produce model of the paramagnetic oxygen sensor for non-medical OEM customers was also developed, in an effort to maintain commitments to industrial customers while fulfilling the increased demand from the healthcare industry.

Hummingbird also won the award, this time in the Innovation category, in 2016. This followed the development of a small, vibration-resistant sensor designed for medical critical care applications.

Discover more at: hummingbirdsensing.com

Performance you can trust

Hummingbird sensors deliver accurate, stable, and repeatable measurements to OEM customers, ready for integration into a wide range of gas analyzers and systems.



Medical devices

From critical care to intra-hospital patient transfer, Hummingbird delivers precision-designed gas sensing to medical device manufacturers around the world, combining superior performance with a low cost of ownership.

Industrial analysis

Hummingbird's high-powered sensors power the accurate and reliable gas measurements needed to maintain product quality, process safety, and environmental monitoring in a vast range of industrial applications.

And beyond...

Hummingbird partners with OEM manufacturers in any sensor that needs high-quality gas sensing, with solutions as diverse as sports medicine, bio-research, marine diving, and anywhere else your innovation takes you.

Ready to help when you need us

If you have a medical or industrial application that needs a gas sensor, Hummingbird is ready to help integrate it into your design. If you know exactly what you need, and you're looking for a supplier that can deliver quality sensors to your production line. From first concepts to finished products, we're here for you, ensuring performance in partnership.

Learn more at hummingbirdsensing.com



Hummingbird
SENSING TECHNOLOGY

Your guide to our sensing technologies

This complete A-Z guide introduces our wide range of sensing technologies ready for use in gas analysis applications within a variety of important industries.

Manufactured by our Hummingbird Sensing Technology business unit, these sensors are key to the highly accurate and reliable measurements provided by our comprehensive range of gas analyzers.

One of Servomex's major advantages as a supplier of gas analysis solutions is the variety of sensors that we have available to select from. Instead of choosing from just two or three sensing technologies to resolve an application challenge, we can apply the most accurate and cost-effective solution from our entire range.

Sensing technologies

Selecting the right sensing technology is essential

Technology	Gas sensed	Typical applications
 Aluminum Oxide	H ₂ O	Air separation units (ASU), medical gases, semiconductors
 Calorimetry	CO, COe	Process heaters, thermal crackers, incinerators
 Coulometric	O ₂	Semiconductors, solder reflow ovens, reactor process control
 Flame Ionization Detector	Total hydrocarbons	ASU, product pipelines, cylinder filling stations
 Gas Chromatography	Multiple	Semiconductors, ASU, medical gases
 Gas Filter Correlation	Multiple	Continuous emissions monitoring, ethylene, chlorine and TDI production processes, HyCO process control
 Infrared	Multiple	Ethylene, chlorine and TDI production, continuous emissions monitoring, ASU process control
 Paramagnetic	O ₂	Oxidation control reactions, EO, PTA and EDC manufacturing, industrial and medical gas production
 Plasma	Multiple	Semiconductors, medical gases, ASU process control
 Thermal Conductivity Detector	Binary gas mixtures	Medical gases
 Laser Moisture	H ₂ O	Semiconductors, UHP gas purity, specialty gases
 Tunable Diode Laser	O ₂ , CO, CH ₄ , NH ₃	Process and combustion control, ammonia slip DeNOx measurements, safety monitoring
 Zirconia	O ₂	Process heaters, thermal crackers, incinerators

Moisture and dew point analysis

Aluminum Oxide (Al₂O₃) sensors work by measuring the capacitance between the aluminum core and a gold film deposited on the oxide layer.

The capacitance varies according to the water vapor content in the pores of the oxide layer. The ultra-thin Al₂O₃ sensors have three innovative structural

improvements that offer better performance than traditional Al₂O₃ sensors, with advantages for sensitivity and stability.

1. **A much thinner oxide layer**

This results in higher capacitance, since this is inversely proportional to the distance of the capacitor's plates from each other. Higher capacitance results in a more sensitive measurement. The thinner layer also allows water molecules to travel in and out of the pores more quickly, ensuring a faster response.


2. **A better-defined barrier layer**

The sharply defined barrier means that the sensor's wet to dry capacitance ratio is very high, reducing the effects of any drift due to undesirable factors. It also reduces metal migration, one of the major causes of drift in conventional Al₂O₃ sensors.


3. **Unique pore geometry**

Holding more water than conventional sensors, the ordered pore geometry increases the change in capacitance for a given change in dew point. This means greater accuracy and a quicker response. It is also more stable, so only annual calibration checks are needed when the sensor is used in clean, non-corrosive gases.

Aluminum Oxide sensor structure

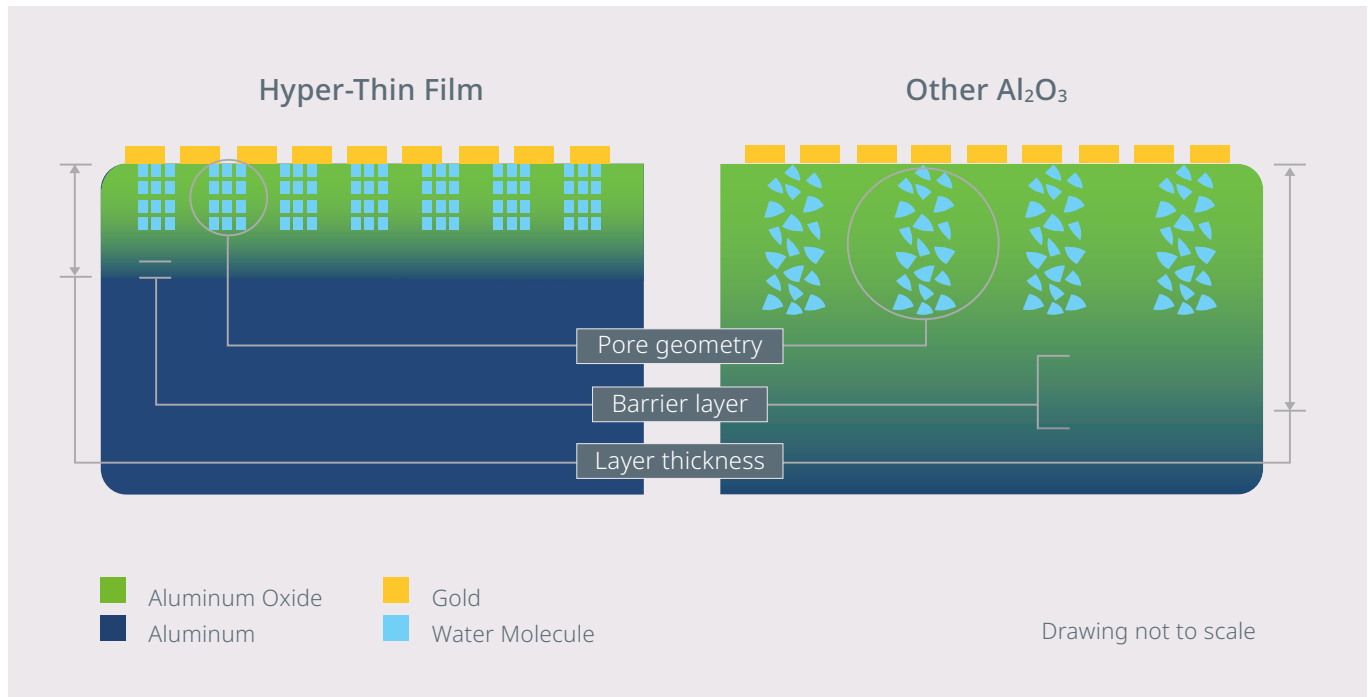

Aluminum Oxide

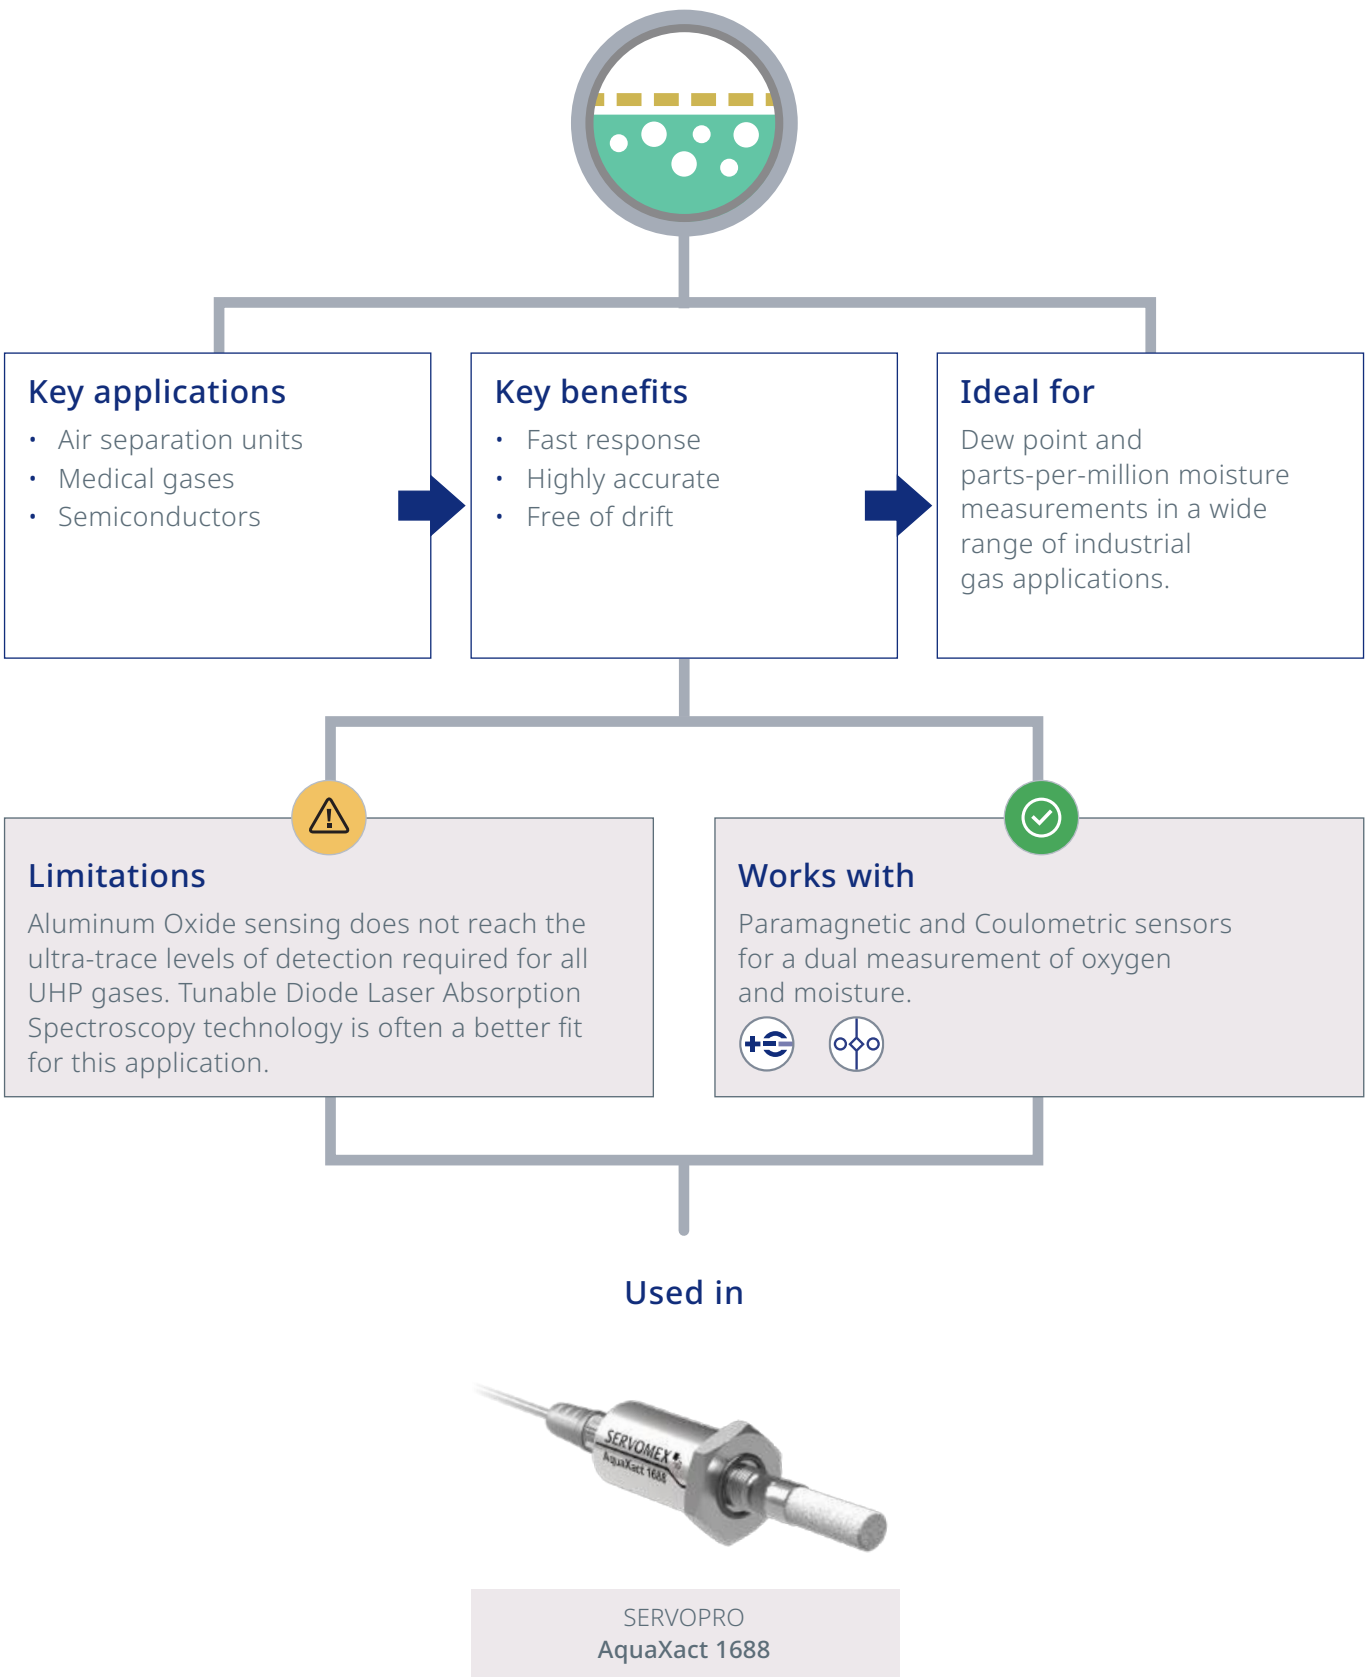

Accurate combustibles measurements

The sensor measures combustibles (COe) from its exothermic reaction with oxygen (O₂) over a catalytic platinum surface, which produces carbon dioxide (CO₂) and the heat generated is used to determine the COe concentration.

A four quadrant bridge track is over-glazed to shield the circuit

from the sample gas and two quadrants are then coated in platinum catalyst. These quadrants form a Wheatstone bridge circuit, with the disc mounted in a cell heated to 300°C (572°F) or 400°C (752°F).

When the gas sample is added, any COe present in the sample will combust on the catalyst,


which will heat the respective quadrant and alter the Wheatstone bridge output voltage.

The output delivered will be directly proportional to the COe concentration, providing an accurate measurement.

Wheatstone bridge



Calorimetry

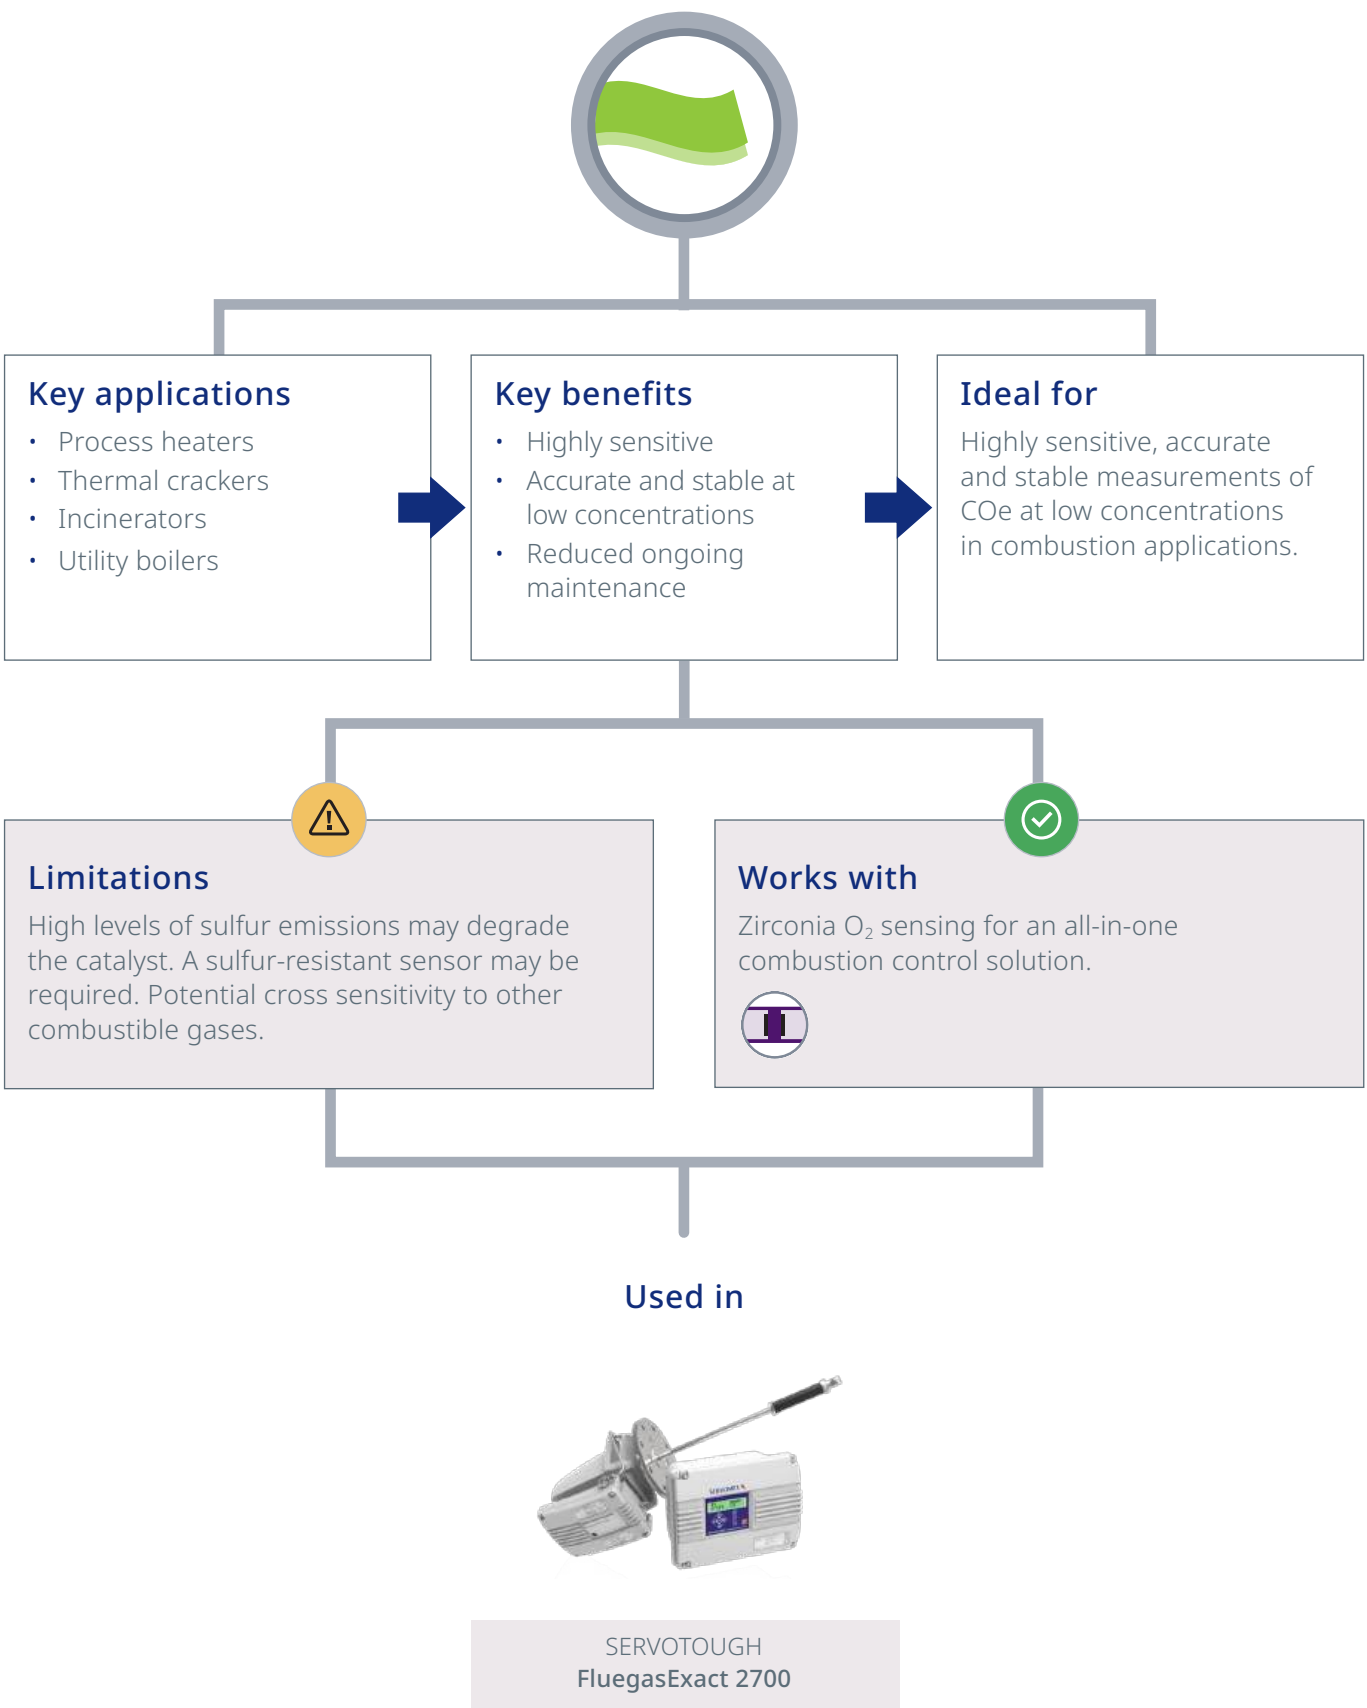

High-sensitivity measurements of oxygen

Our Coulometric technology enables the measurement of oxygen (O₂) at percent or parts-per-million (ppm) levels. It is non-depleting, so there is no requirement for periodic cell replacement, and it avoids the false low readings associated with standard electrochemical sensors. It operates through a simple Coulometric process where O₂ from the sample gas is reduced


to hydroxyl ions at the sensor cathode. The resulting current flow is proportional to the O₂ content in the gas, and the process signal can be displayed in ppm or parts-per-billion (ppb) units of O₂. Coulometric sensors respond very quickly to changing O₂ concentrations. For instance, a 0-1,000 ppm range sensor can be exposed to air and in less than

a minute will measure <10 ppm on pure nitrogen. This is highly beneficial for users who have upset-prone applications. Additionally, the performance of the sensor is unaffected by reasonable changes in flow rate. Because the non-depleting sensor is not consumed when exposed to O₂, it has a long lifespan and does not require a purge gas to protect it when not in use.

Hummingbird Coulometric sensor



Coulometric

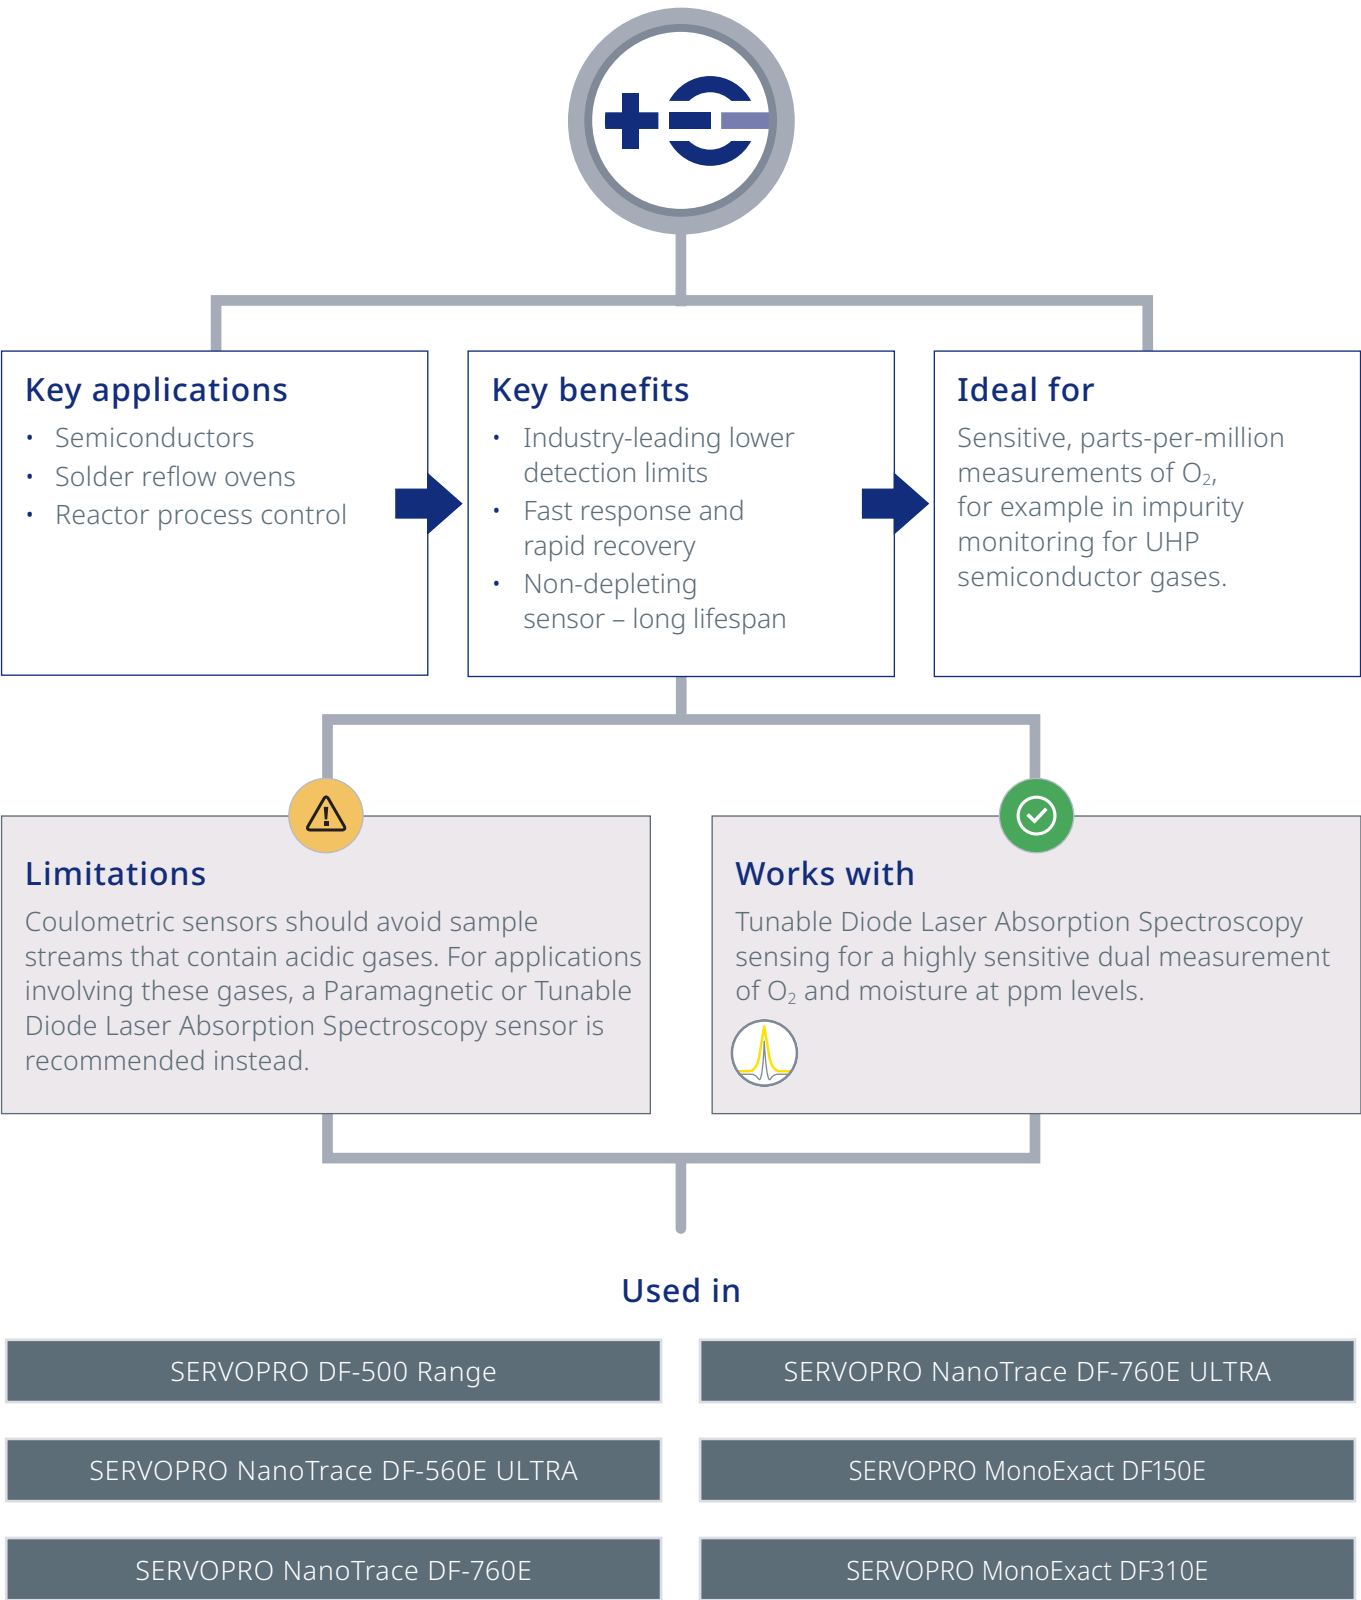

Measuring hydrocarbons down to ultra-trace levels


Flame Ionization Detector (FID) sensors are designed to measure flammable Total Hydrocarbons (THC) down to parts-per-billion (ppb) levels.

They work by detecting ions formed in the combustion of organic compounds in a sample, producing charged molecules that cause electrical conduction between two electrodes.


The ions are attracted to a collector plate and induce a current upon hitting the plate. The FID measures this conduction and produces an output which is directly proportional to the concentration of THC in the sample.

This signal is then enhanced by a logarithmic amplifier that reduces drift and thermal noise, delivering an accurate, non-depleting measurement with 100 ppb resolution.

A typical Flame Ionization Detector

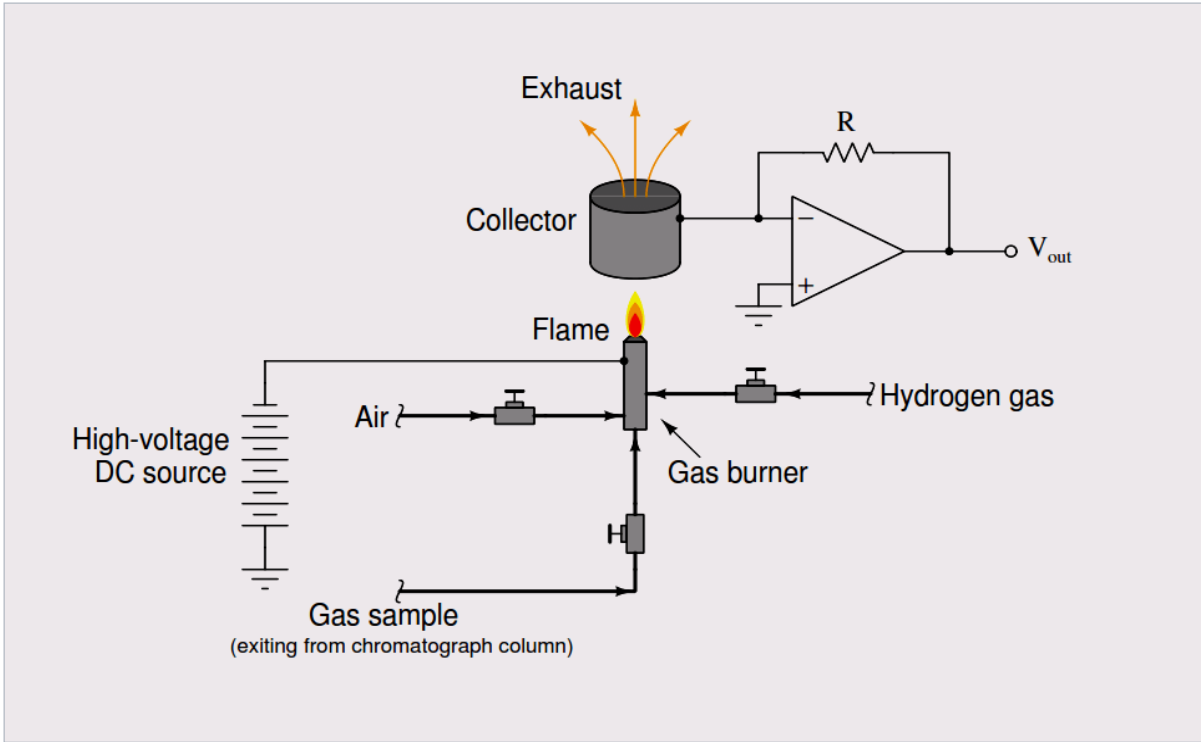

Flame Ionization Detector

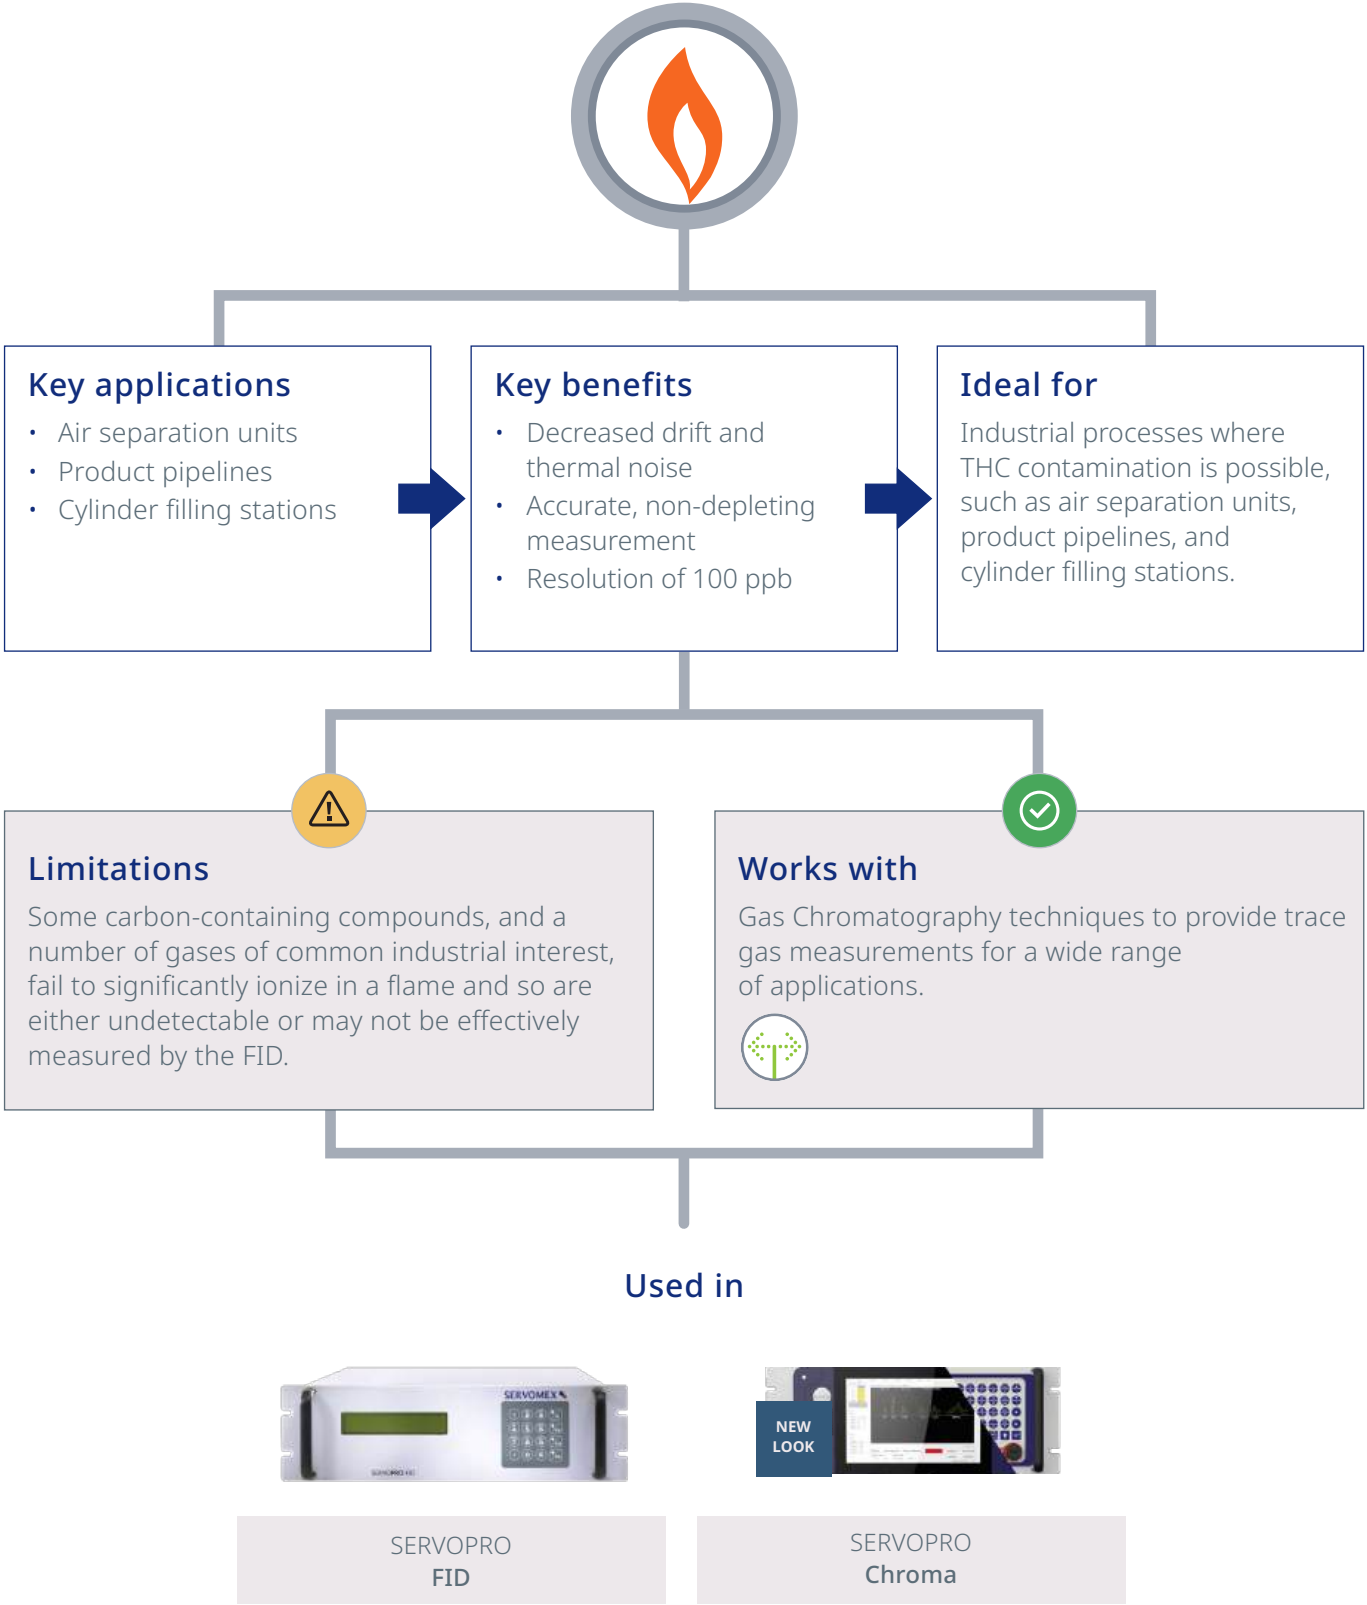

High-purity analysis for a range of gases

Gas Chromatography (GC) separates out a mixture in the gas phase to determine the presence and concentration of constituent components. Under optimized conditions, it can measure down to parts-per-billion (ppb) levels, making it ideal for high purity processes.

The components of a mixture in the gas phase are separated by introducing a small portion of the sample into a flowing carrier gas (mobile phase),

which percolates through a stationary phase consisting of particulates packed within a column.


The different gas constituents are separated due to their own specific, adsorptive interaction between the stationary phase and the mobile phase. This causes the constituents to exit the column (elute) at different times.

These specific times are detected at the exit of the column.


By comparing times, users can identify analytes by the order in which they elute from the column. Each constituent concentration is determined, after calibration, from the integral of each analyte's detector response time.

The conditions under which GC technology operates differ for each application, and require individual optimization.

The Gas Chromatography technique

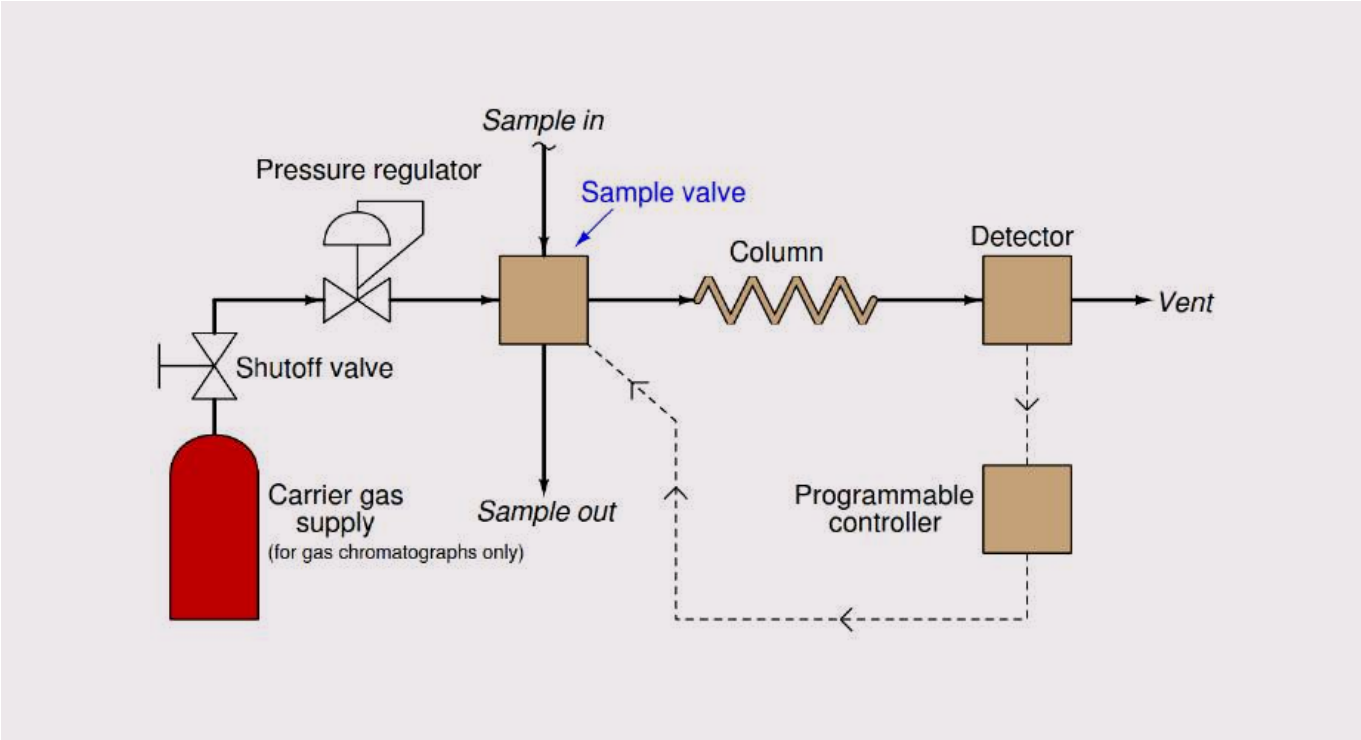

Gas Chromatography

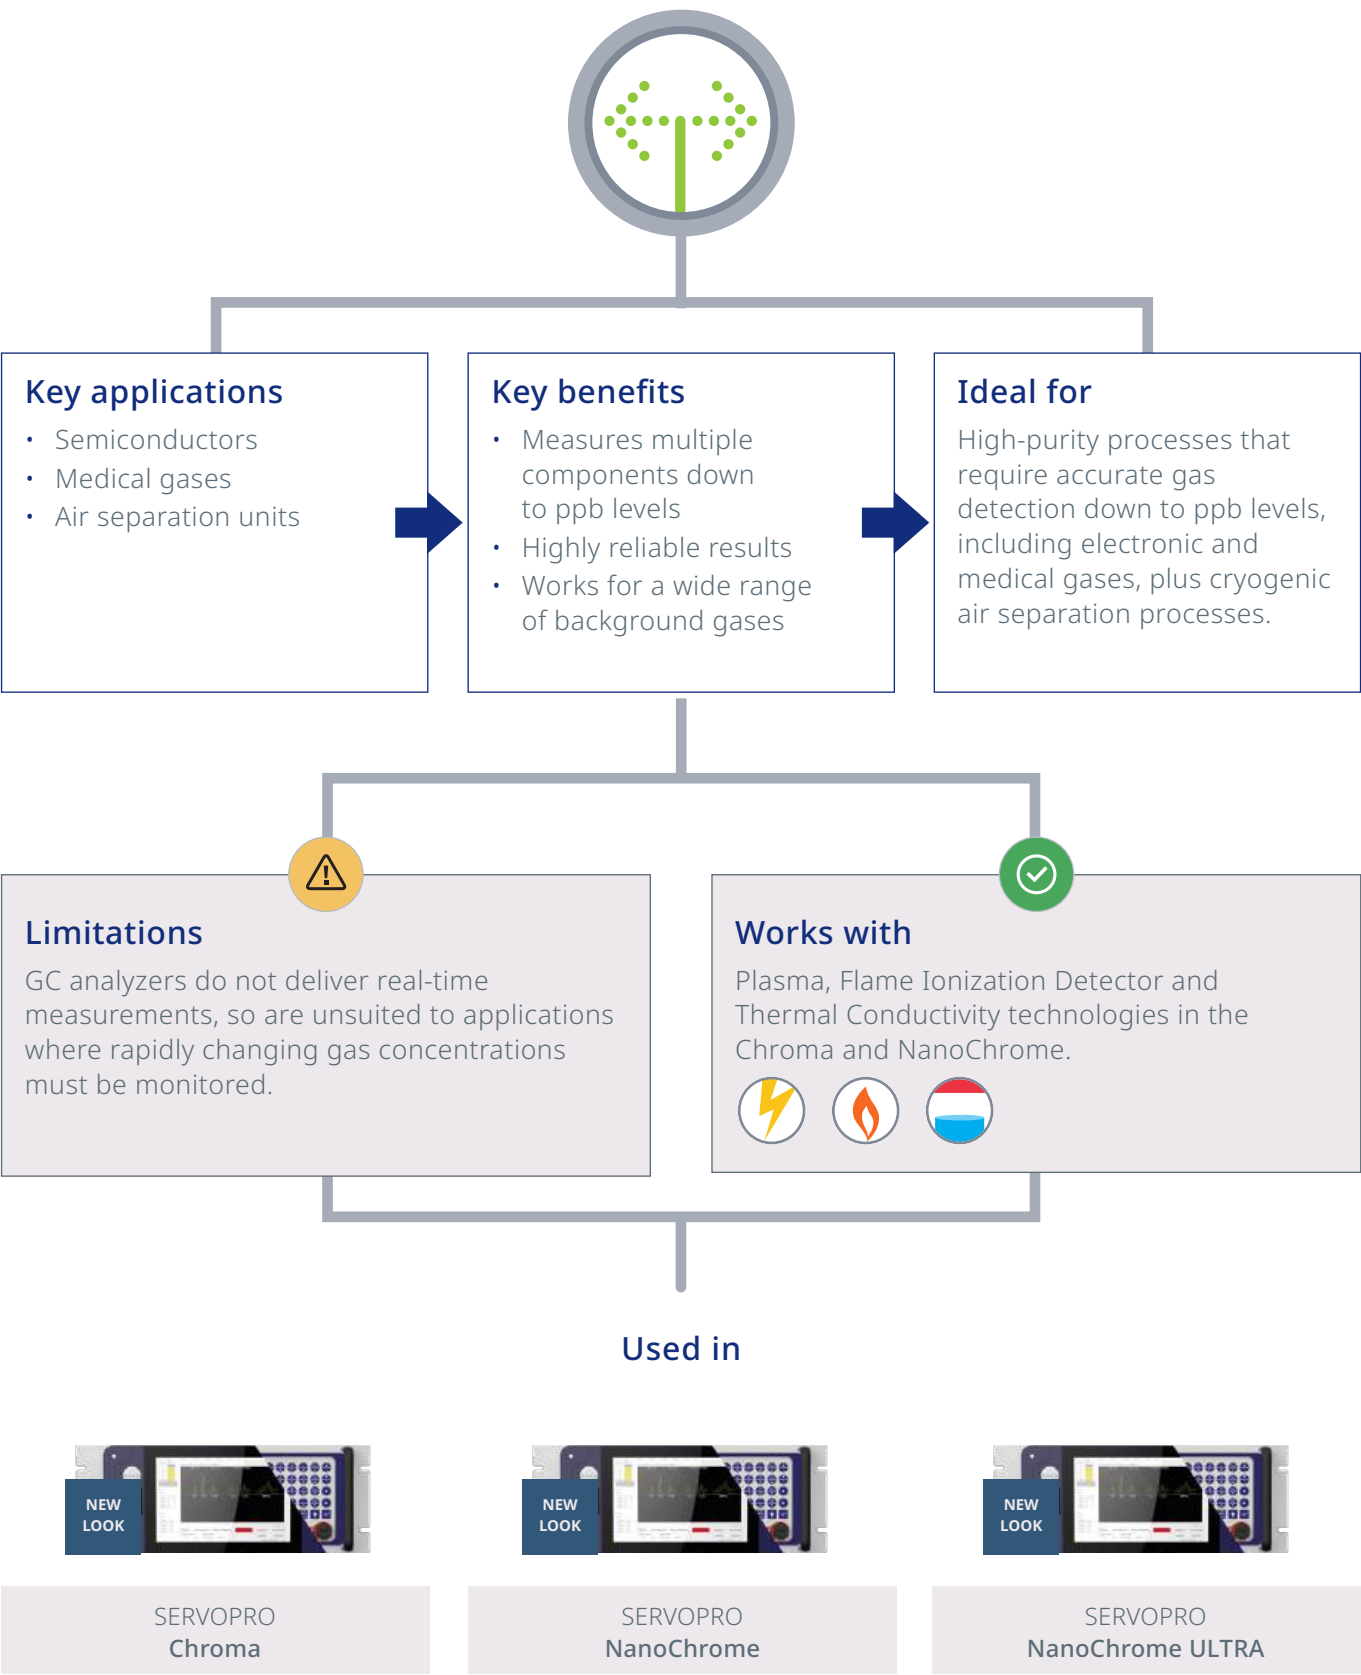

Stable, ultra-accurate photometric gas analysis


Gas Filter Correlation (GFC) sensing is an enhanced version of the photometric analysis used in our Infrared technologies. It performs effectively where extremely accurate, low-level measurements are needed, or where background gases may interfere with the measurement.

Gases have the ability to absorb unique light wavelengths – GFC sensing uses that property to detect the concentration of a selected gas in a mixture.


Two gas-filled cuvettes are mounted on a rotating disk, each passing through a beam of light alternately. One cuvette (the measure cuvette) is typically filled with nitrogen while the other cuvette (the reference cuvette) is filled with a sample of the gas to be measured. Light is passed through the gas to be measured: the difference in absorbance is measured and provides a direct output of the gas concentration.

Offering real-time measurement response, GFC measurements are unaffected by background gases, and the technique is virtually immune to obscuration of the optics. This prevents sensor drift, greatly reducing calibration frequency.

The GFC Transducer

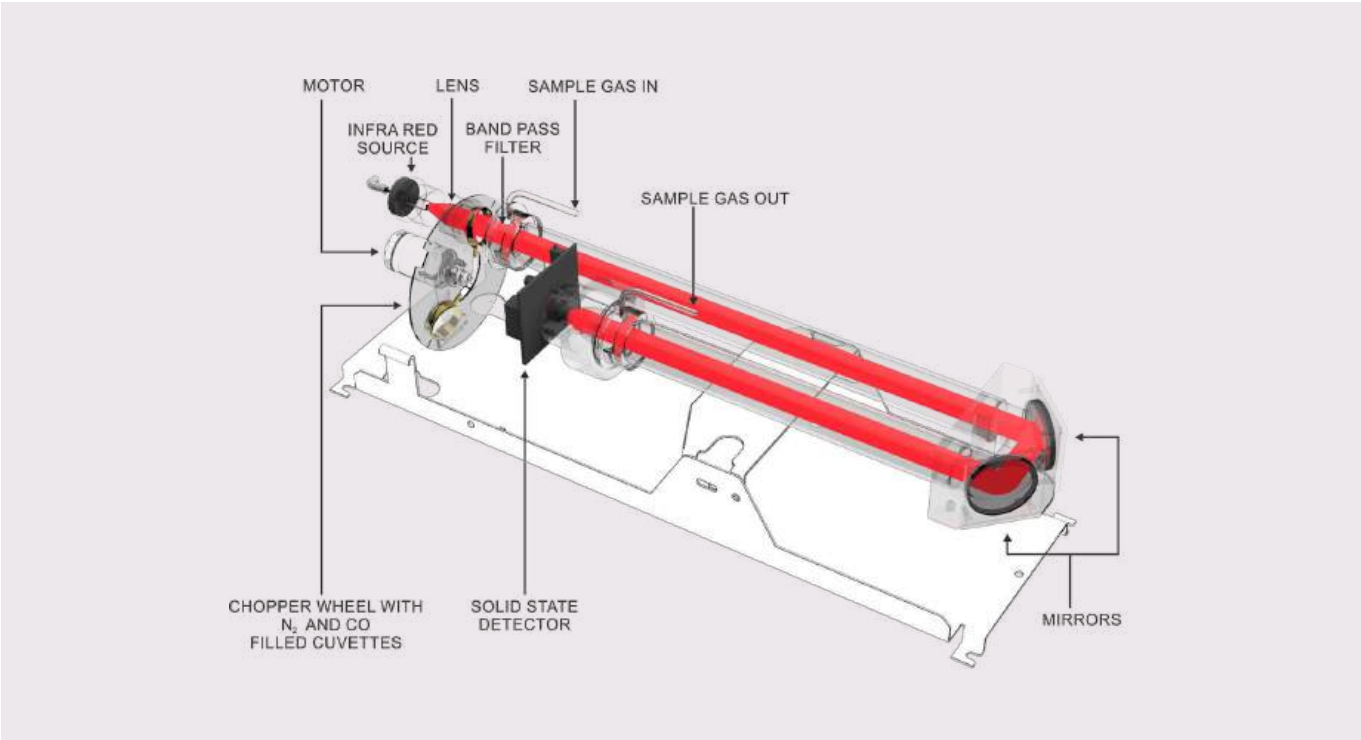

Gas Filter Correlation

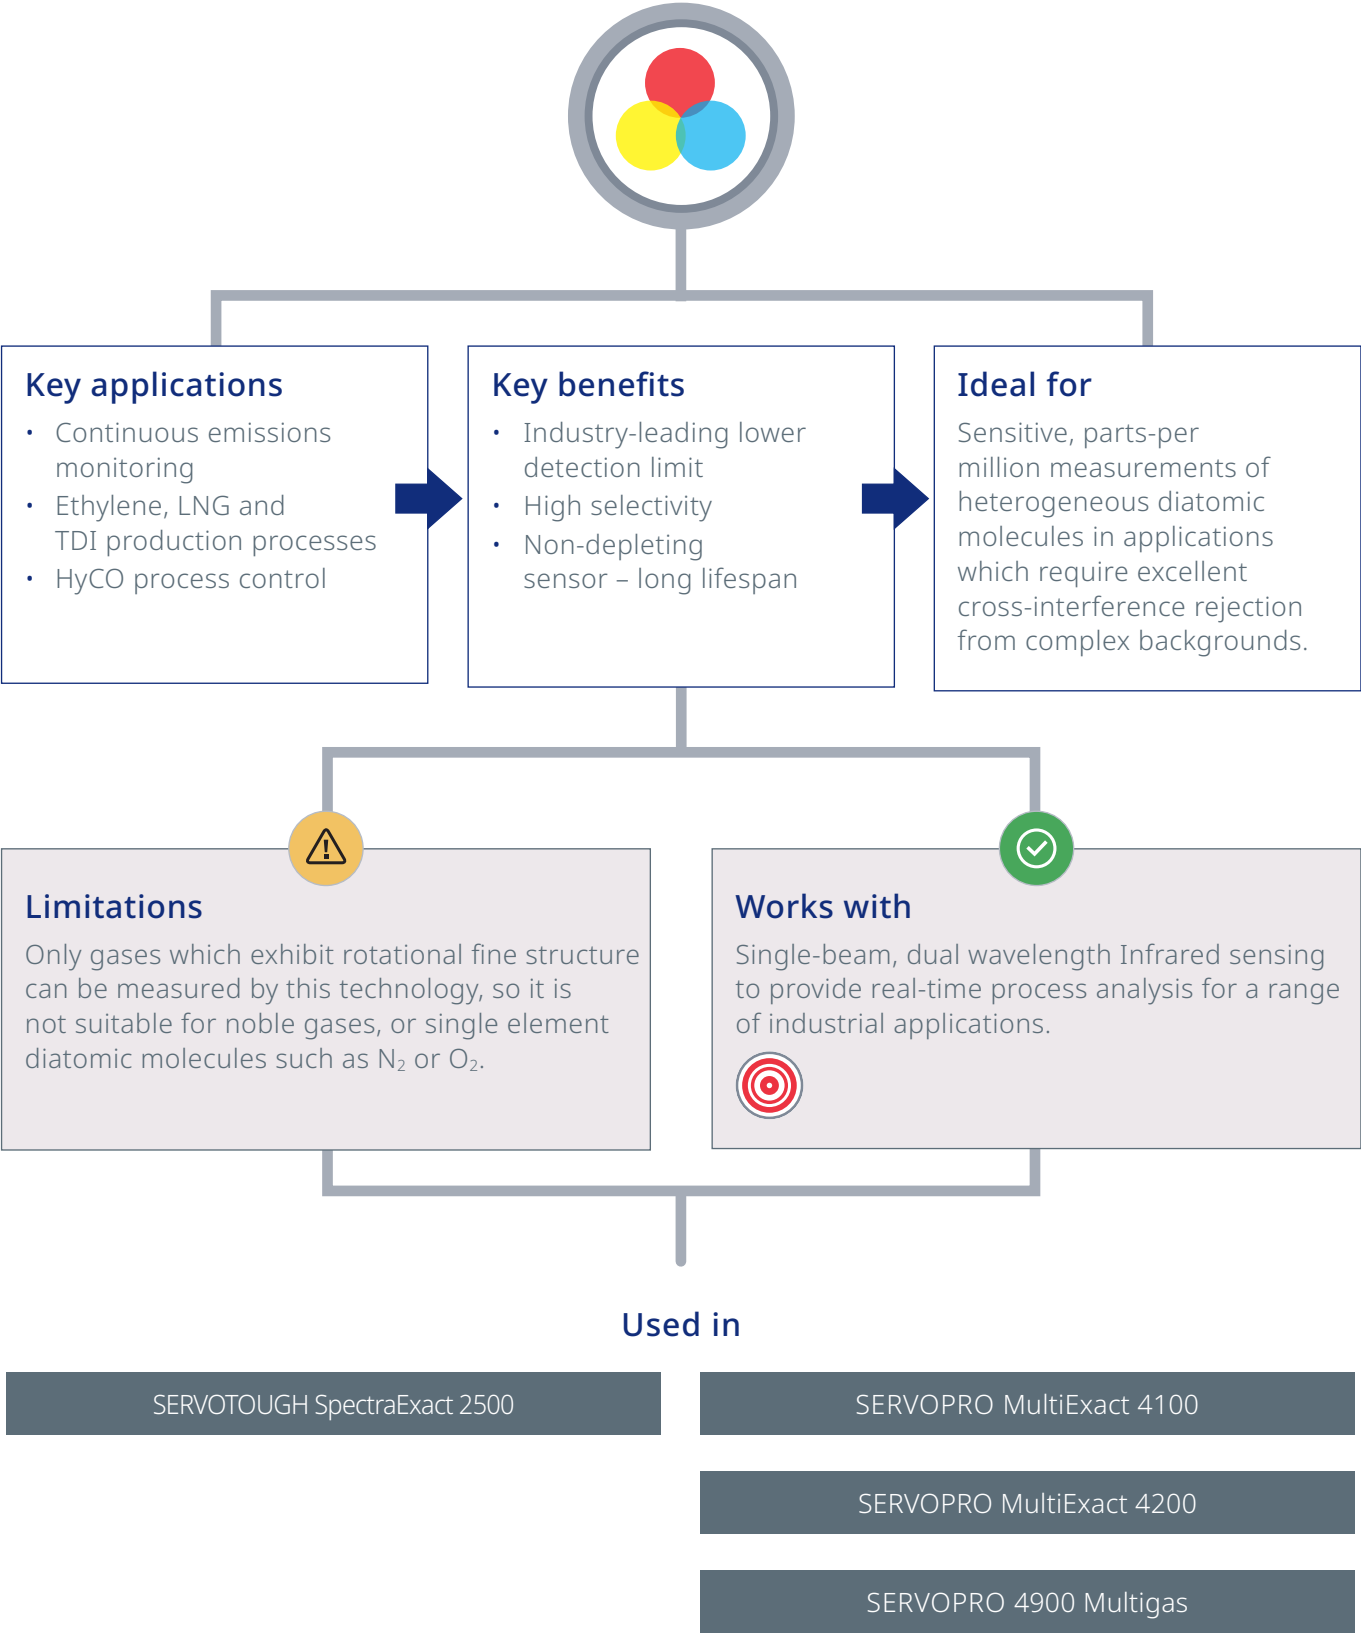

Real-time measurements of gases in a mixture

Our Infrared (IR) sensors focus an IR light source through a sample cell holding a continuously flowing sample of the gas mixture, and onto a detector after wavelength selection.

The property of some gases to absorb unique light wavelengths can be used to detect the concentration of a selected gas in a mixture.

Depending on the intended application, this concept can be applied in two ways:

Single Beam, Single Wavelength (SBSW)

Delivers fast, stable and accurate real-time measurements with low maintenance requirements. It is used where a small transducer is required – the IR light source is electronically modulated, removing the need for a motor and rotating filters.


Single Beam, Dual Wavelength (SBDW)

Uses a pair of optical filters mounted on a rotating disc, which passes through a beam of IR light alternately. One filter (the measure filter) is chosen to pass light only at a wavelength that the gas to be measured absorbs, while the other filter (the reference filter) has a light passed through it at a wavelength unaffected by the gas to be measured. The difference in absorbance is measured by the detector and provides a direct output of the gas concentration.

SERVOTOUGH SpectraExact 2500



Infrared

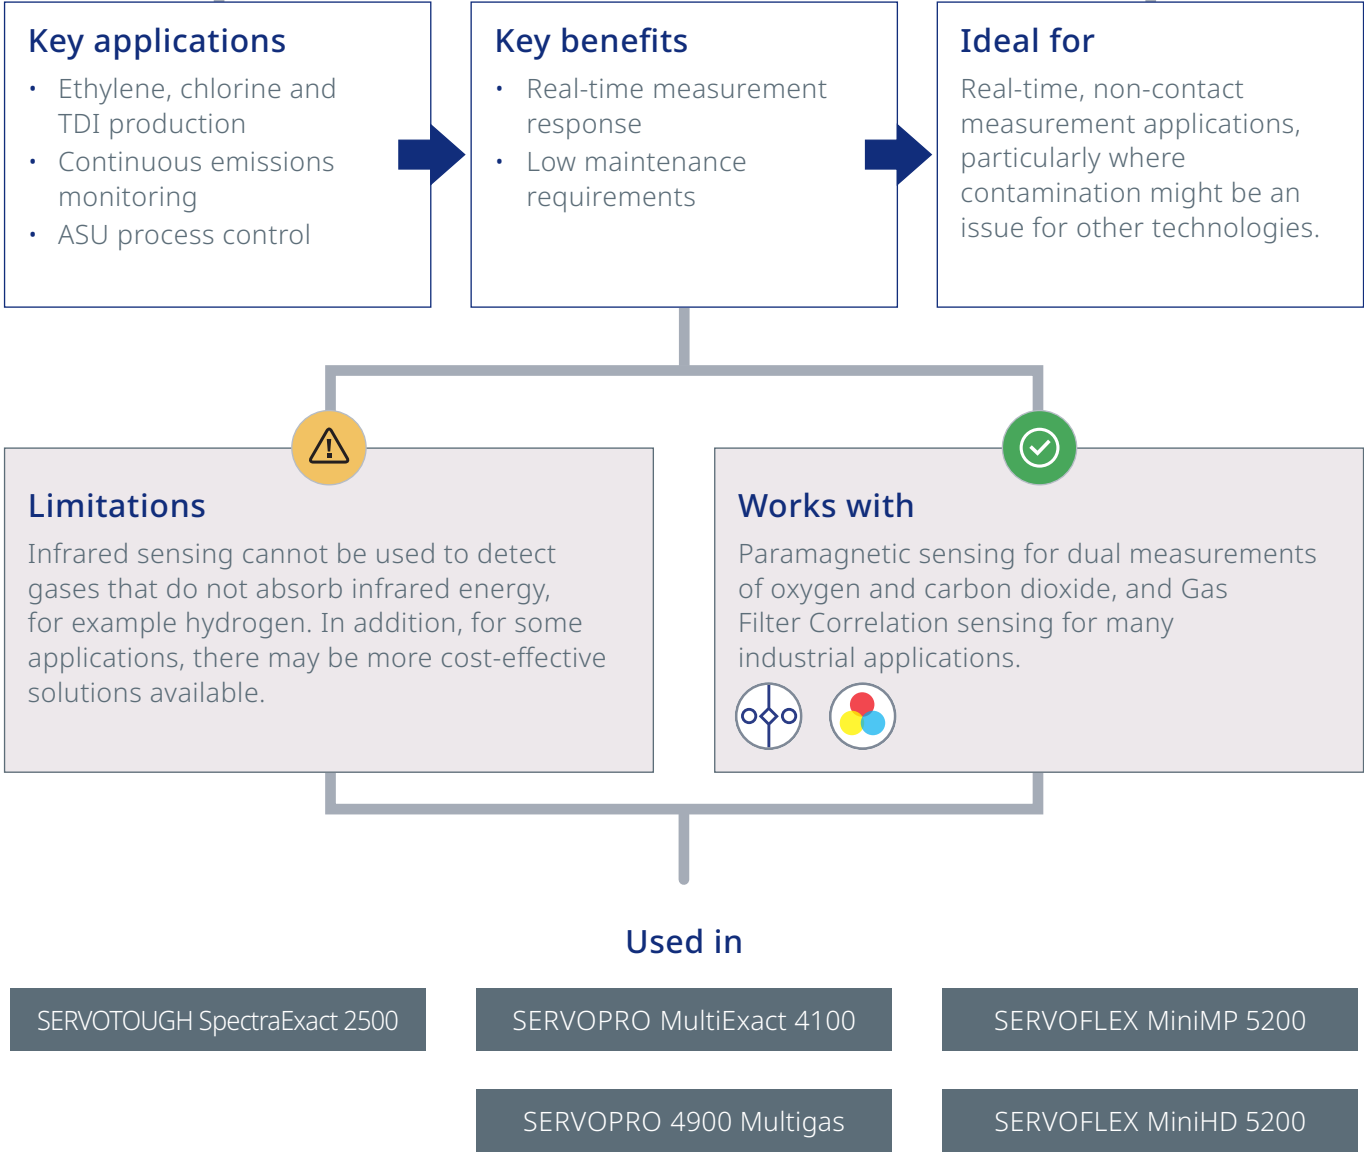

An innovative solution for percentage oxygen


Our groundbreaking magnetodynamic Paramagnetic technology provides fast, accurate and sensitive measurements of percentage levels of oxygen (O₂).

The Paramagnetic cell consists of two nitrogen-filled glass spheres, mounted within a magnetic field, on a rotating suspension, with a centrally-placed mirror. Light shines on the mirror and is reflected onto a pair of photocells.


O₂ is naturally Paramagnetic, so is attracted to the magnetic field, displacing the glass spheres and causing suspension rotation which is detected by the photocells. Current is applied through a feedback coil present in the magnetic field to provide sufficient torque to return the suspension to its original position. The magnitude of this current is directly proportional to the O₂ present in the sample gas mixture.

Unlike electrochemical sensing technologies, a Paramagnetic cell never needs changing and its performance never deteriorates over time, reducing ongoing maintenance requirements and delivering a long operational life.

Inside a Paramagnetic cell

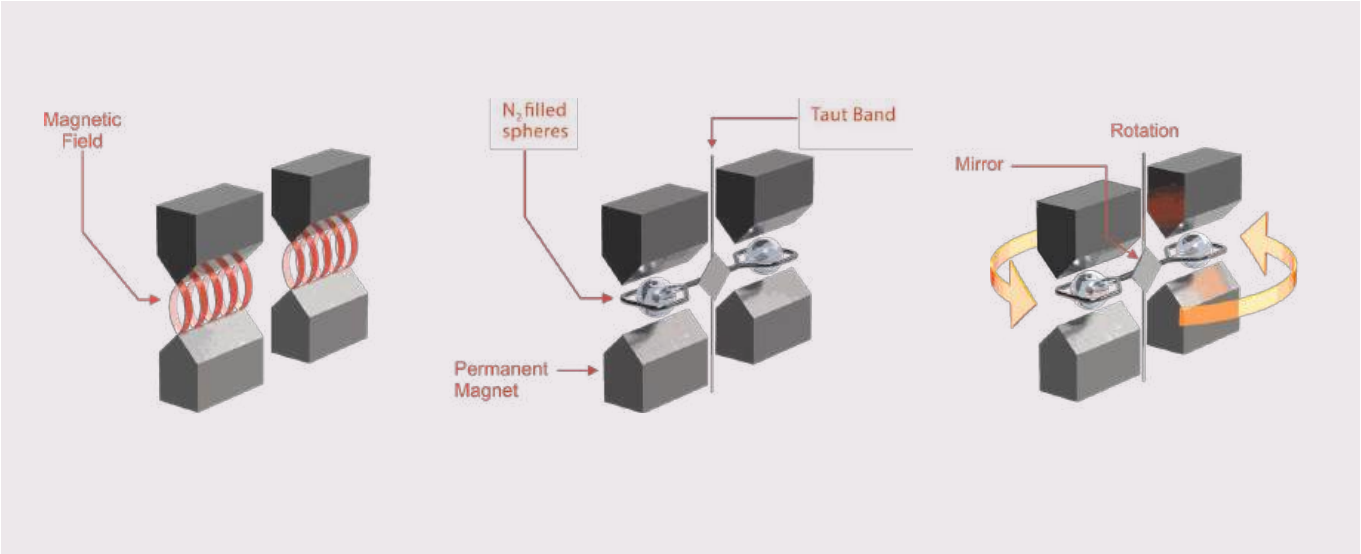

Paramagnetic

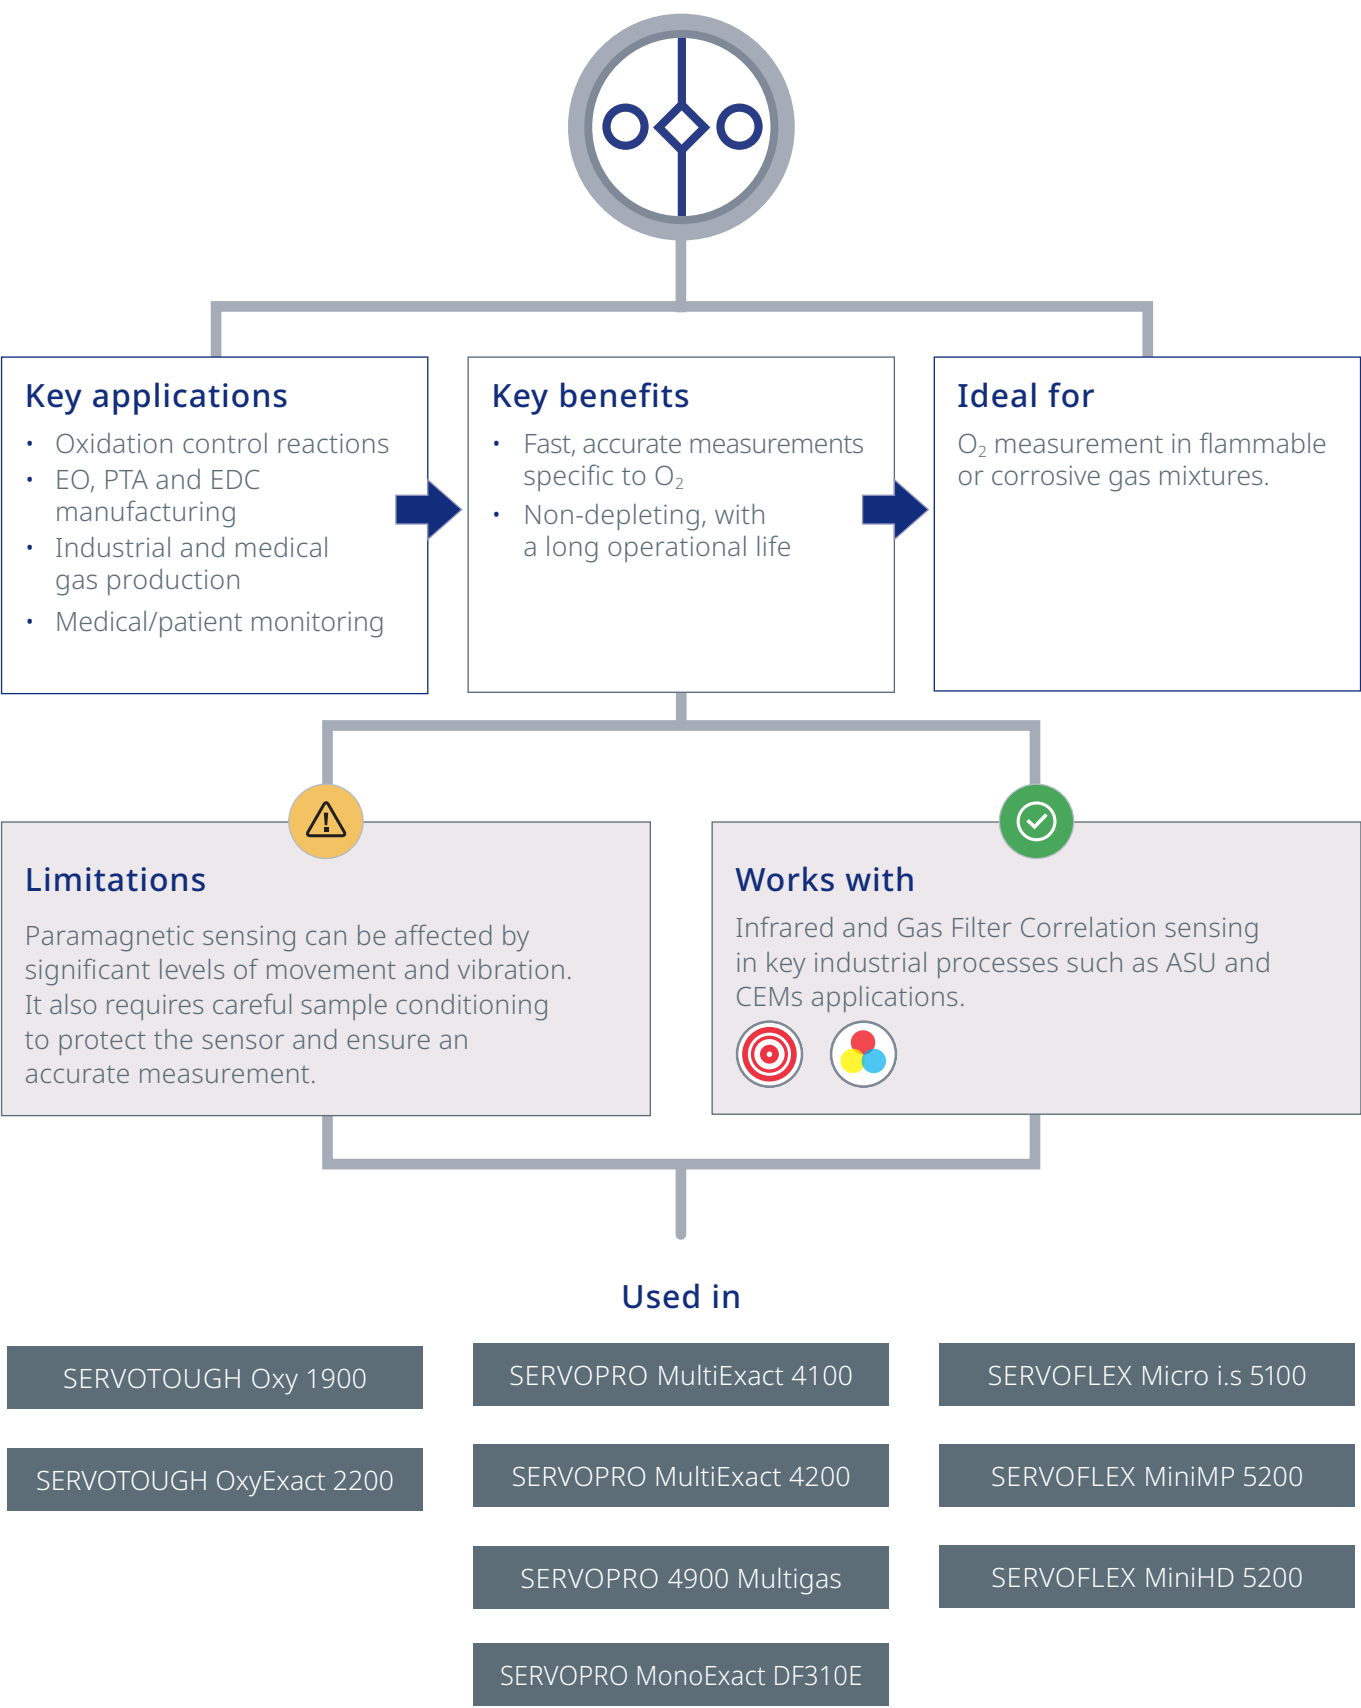

A highly specific and stable gas measurement

A discharge process occurs when sufficient energy is provided to ionize a gas stream. The resulting plasma consists of free electrons, ions, neutral molecules, and high-energy photons in a continuous state of ionization and recombination.

When energized by an external alternating high voltage field, gases flowing in a Dielectric Barrier Discharge (DBD) glow

plasma produce intense emission spectra which relate directly to their unique molecular bonds.


The optical emission spectroscopy (OES) method combines precision optical filters and detectors to provide a highly selective gas measurement.

Our DBD plasma sensor consists of a custom quartz cell with transparent windows fitted

with electrodes powered by a controlled radio frequency (RF) electromagnetic field. Multiple OES detector assemblies surrounding the quartz cell make selective measurements of emitted spectra of multiple gas species at the same time.

This highly sensitive and selective speciation of gases enables measurement of trace parts per billion (ppb) of gases.

Each gas produces unique gas spectra

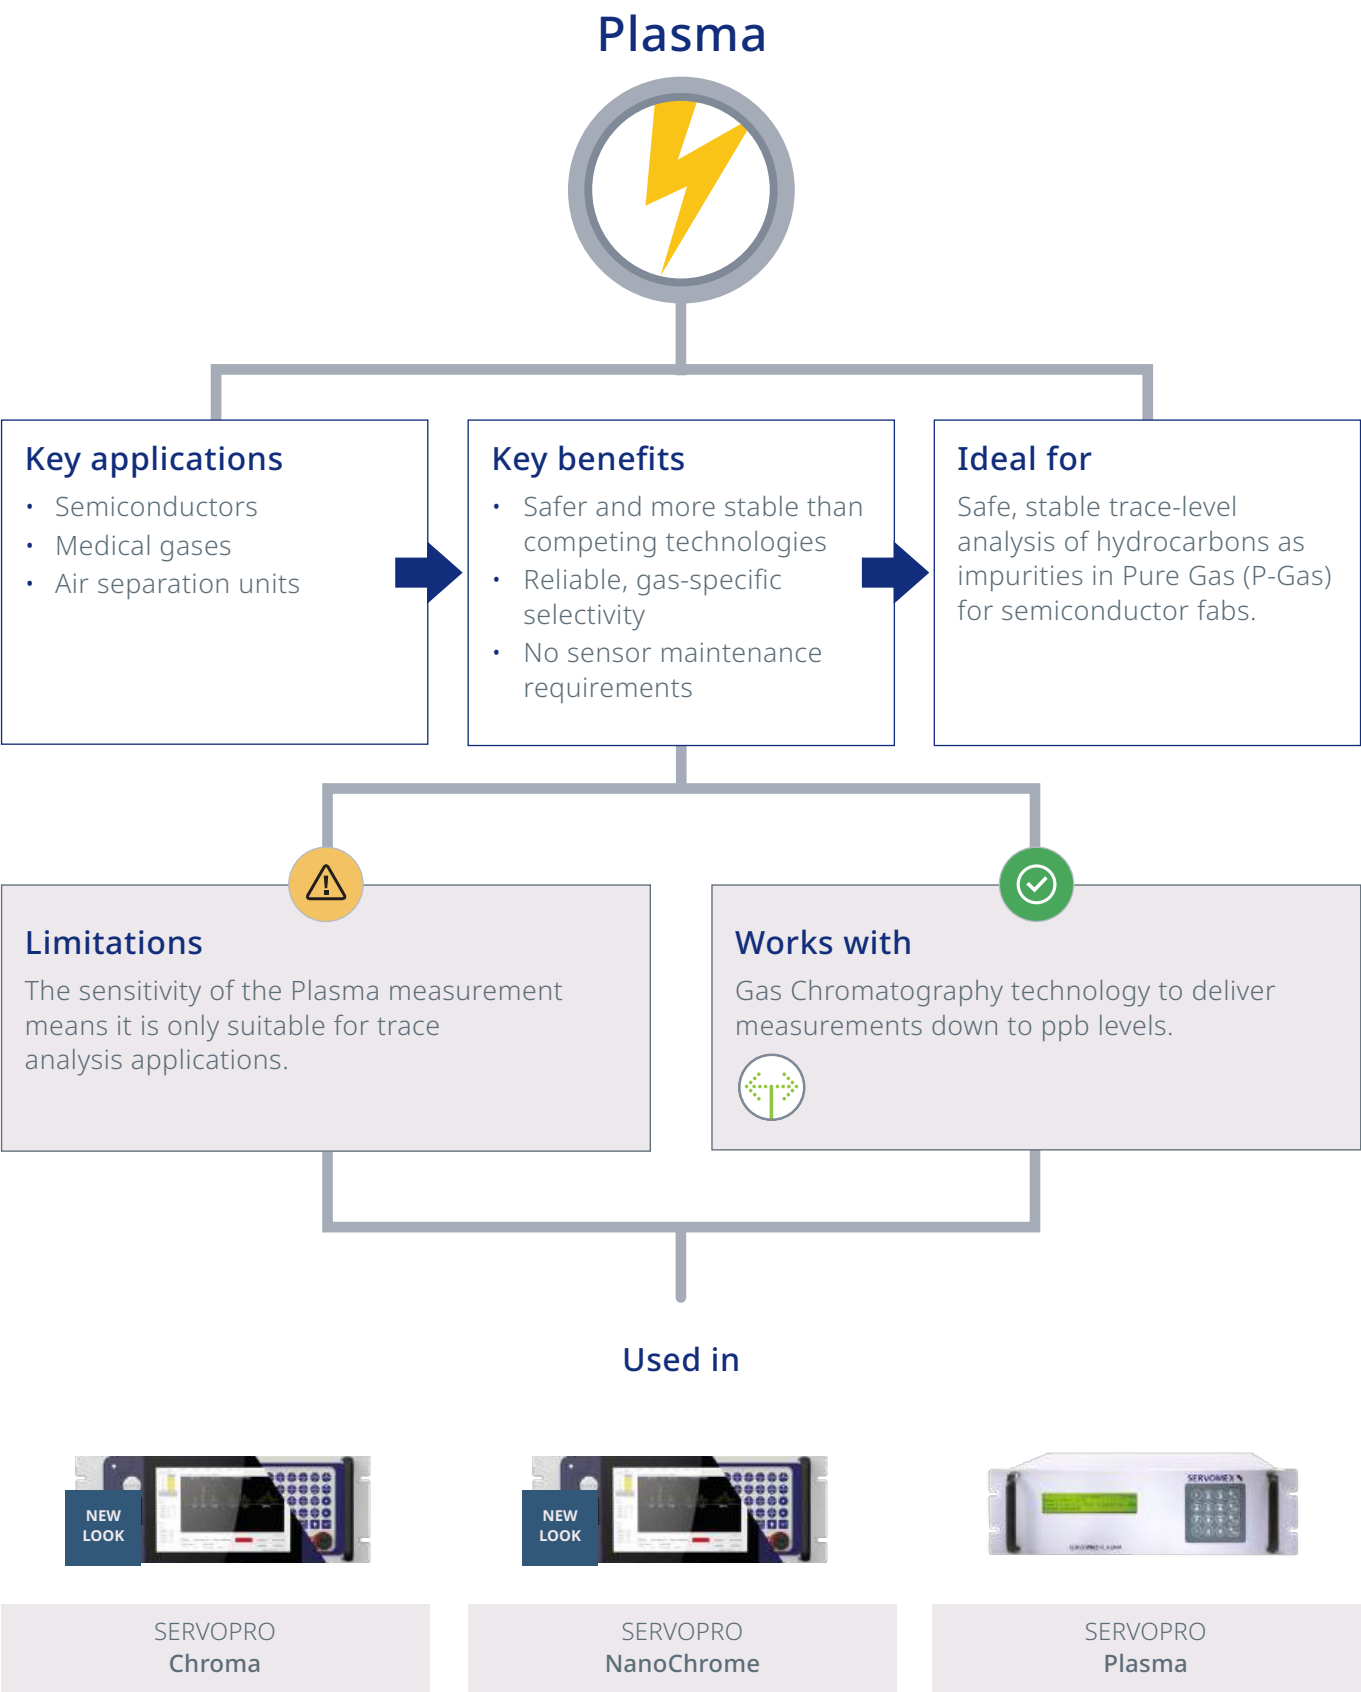


Measuring inert gases in a binary mixture

The Thermal Conductivity Detector (TCD) consists of an electrically heated Wheatstone bridge in a temperature-controlled cell. For GC-TCD applications, the carrier gas (helium) is passed over the reference arm of the bridge, and the column effluent passes over the analyte arm under the same conditions for flow rate and temperature.


When no impurities are eluting from the column, the heat loss from the analyte arm matches that from the reference arm. When an analyte elutes from the column, it affects the thermal conductivity, changing the electrical resistance, which can be measured as a signal.

Thermal Conductivity is a robust technique for determining the concentrations of gases in a binary mixture. The TCD is a universal sensor. Analytical methods involving a TCD can be used where the constituents of the binary gas are known, such as in GC-TCD.

The Thermal Conductivity sensor

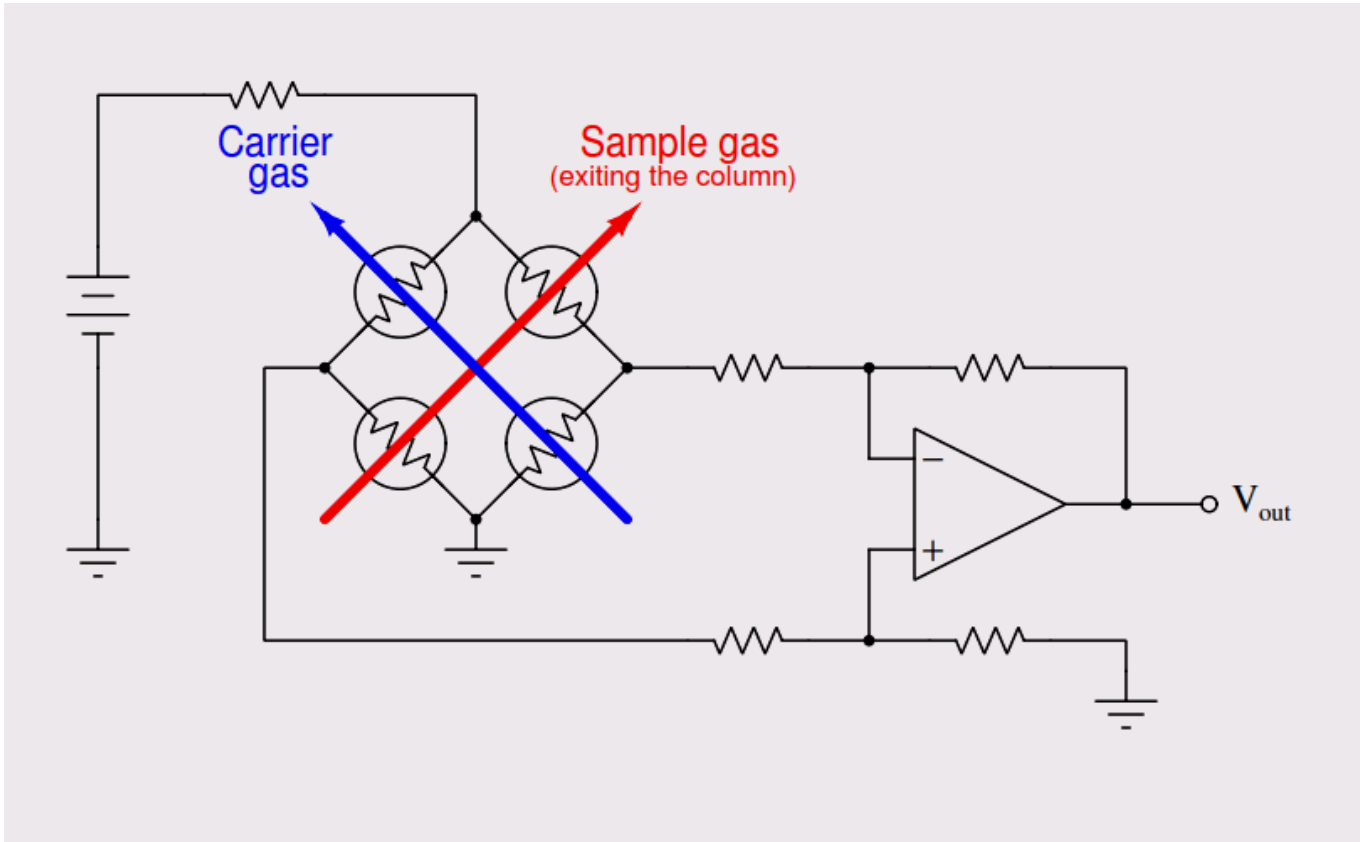

Thermal Conductivity Detector

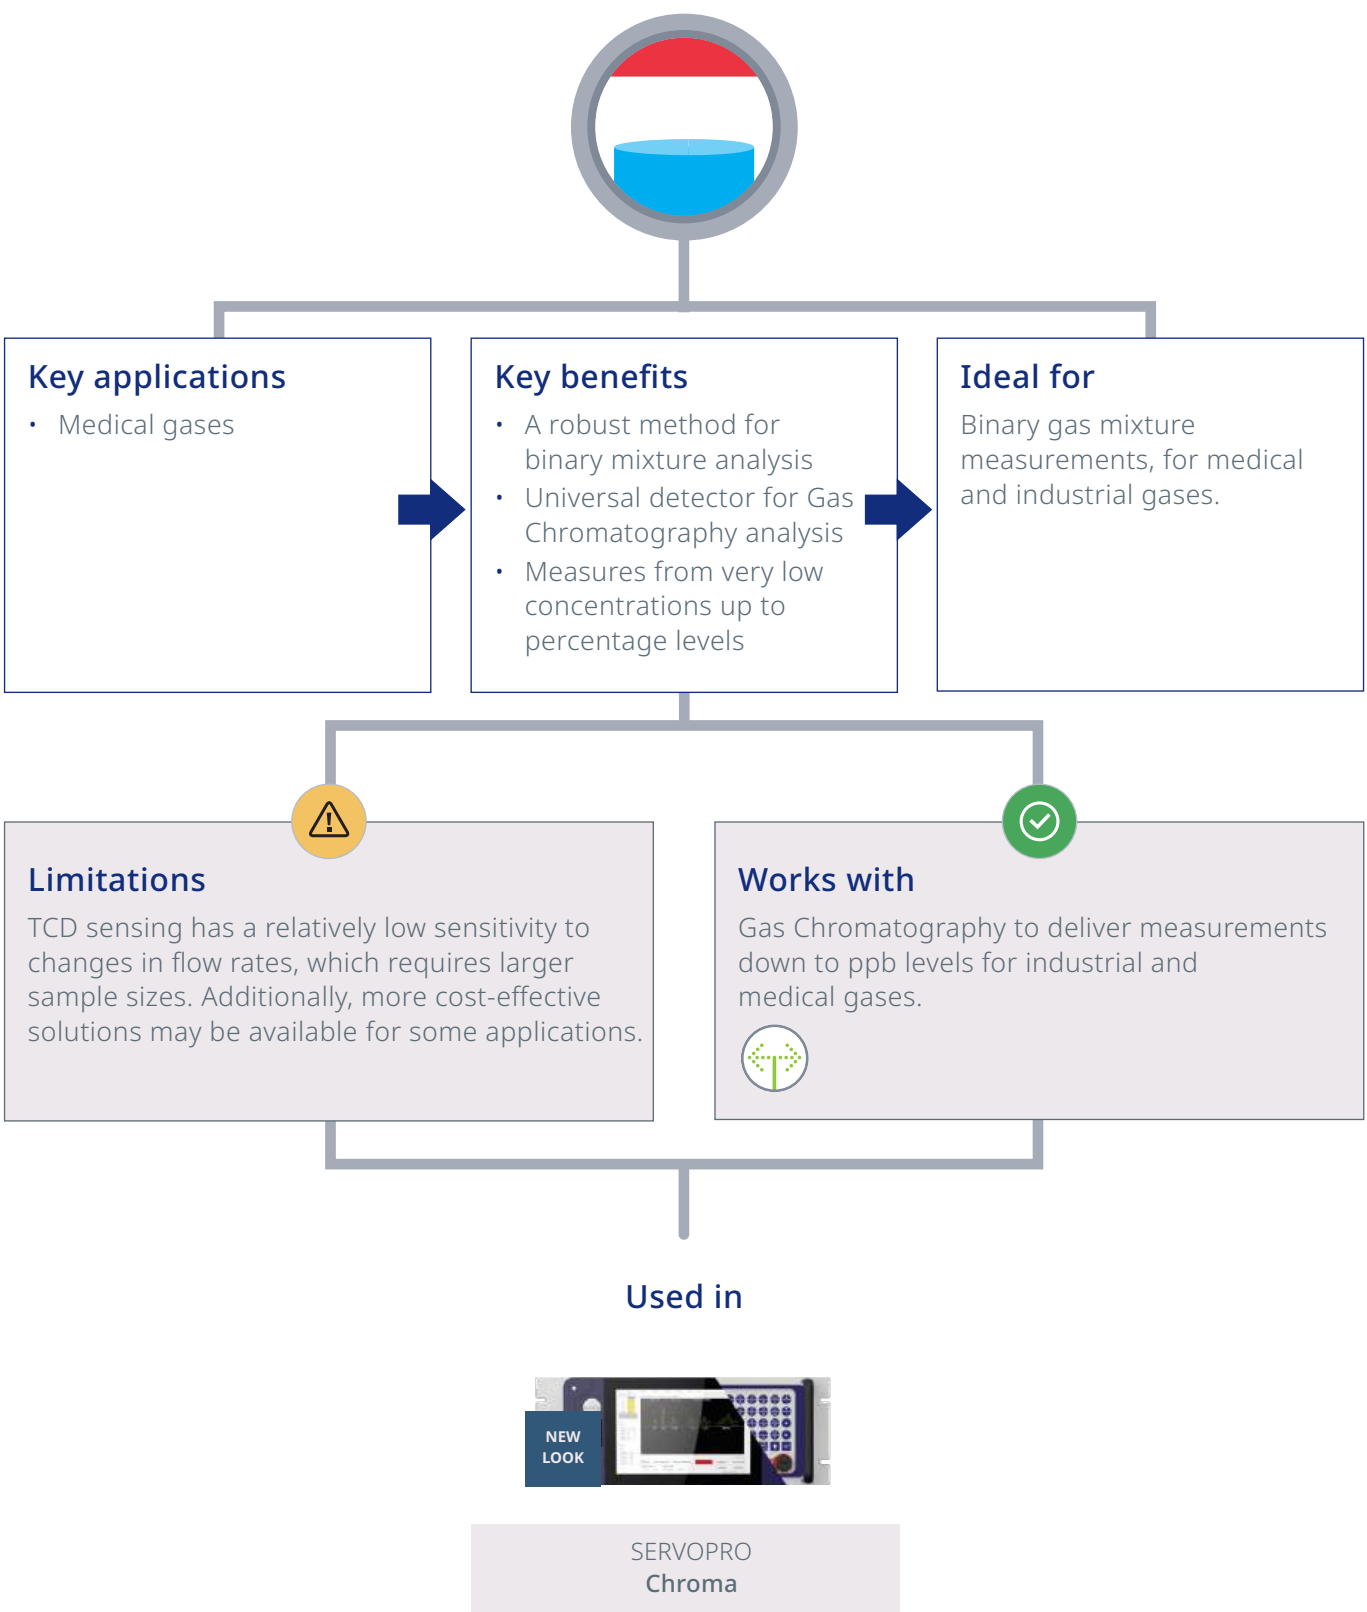

Simple, sensitive moisture analysis

This Laser Moisture analysis technology uses Tunable Diode Laser Absorption Spectroscopy (TDLAS) spectroscopy to measure trace moisture in pure gases. It has a simple, robust design, using a single laser source and single detector to measure the sample and reference gases.

TDLAS has advantages over other measurement techniques, as the moisture sample comes only into contact with a few optical components made from

very robust materials. It works according to the fundamental principle of Beer's law; therefore the reading is stable over time and never requires calibration.


To provide a more sensitive measurement, our sensors use a Herriott cell to reflect the laser back and forth numerous times, using mirrors inside the measuring cell. This increases the laser path length, achieving extremely high sensitivity.

TDLAS moisture sensing delivers exceptional performance capable of measuring down to industry-leading sub-parts-per-billion levels, drift-free operation, high accuracy and low maintenance. This is achieved through self-correcting optics and laser line locking onto the water peak, removing all possibility of significant drift.

Semiconductor manufacture relies on ultra-high-purity gases



Laser Moisture

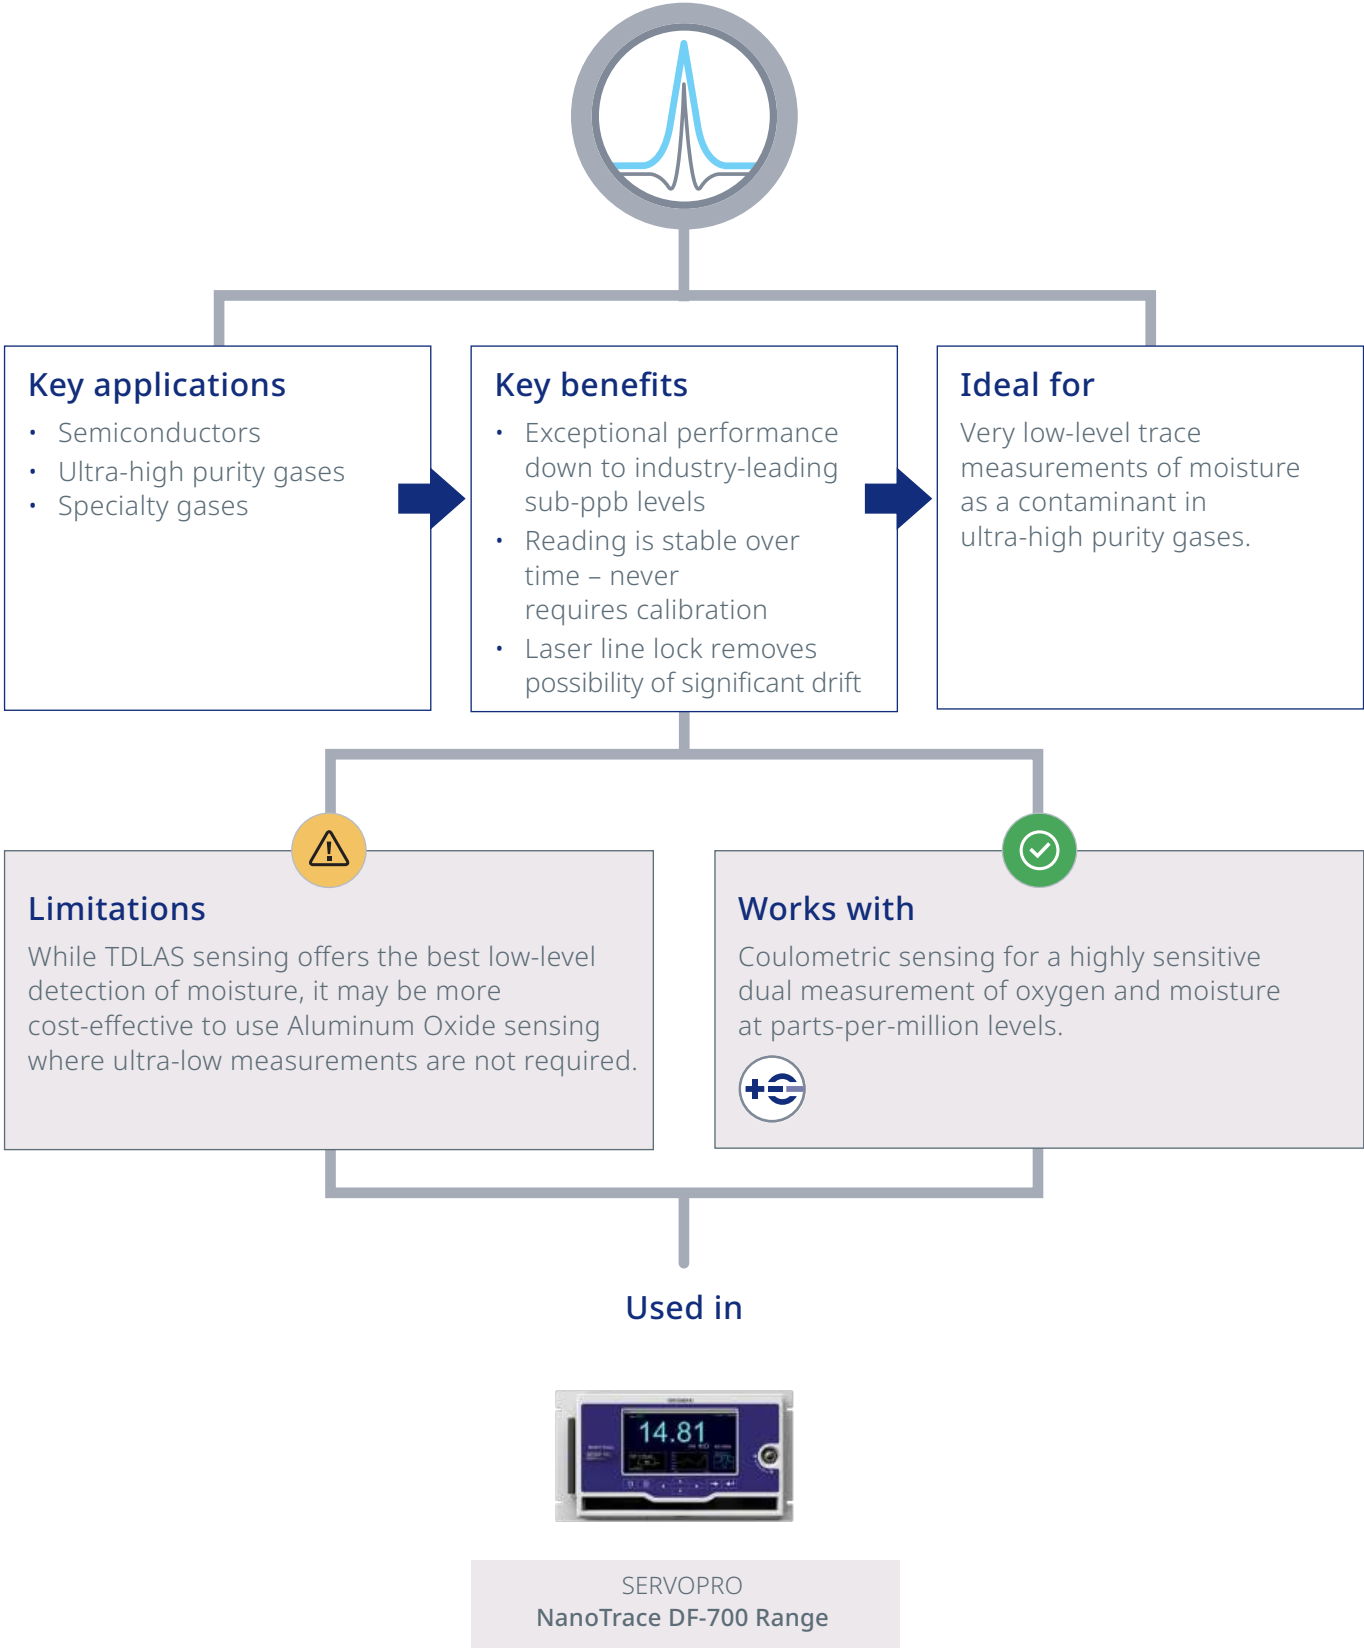

Fast in-situ cross-stack measurements

Tunable Diode Laser (TDL) sensors use a single-line “monochromatic” spectroscopy technique that offers highly stable calibration, a continuous, fast, in-situ measurement, and the avoidance of cross-interference from other gases.

The TDL system consists of a laser light source, transmitting optics, an optically accessible absorbing medium, receiving

optics and detector(s). The signal information is held in the gas absorption line shape, which is obtained by scanning the laser wavelength over the specific absorption line. This causes a reduction of the measured signal intensity, which is detected by a photodiode and used to determine the gas concentration and other properties.

Our TDL analyzers use a second harmonic detection (2f) modulation technique that delivers greater accuracy, sensitivity, and reliability of measurement, especially in low parts-per-million level measurements.

Fig. 1: Close-up of the line lock system showing the cuvette and beam splitter



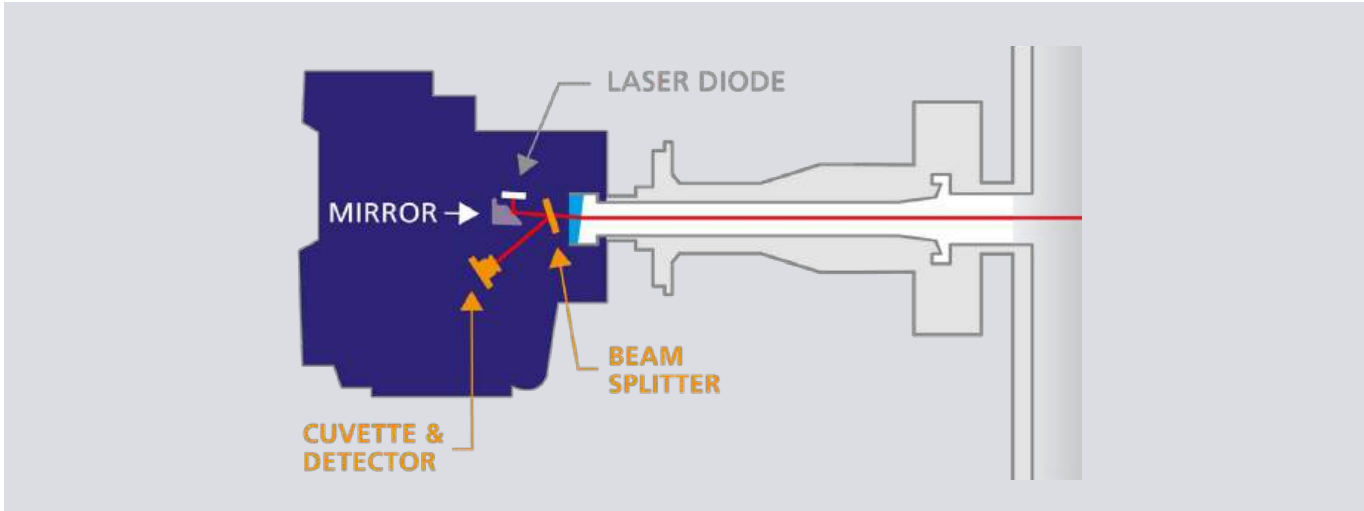


Fig. 2: The SERVOTOUGH Laser 3 Plus installed across a stack, with line lock system (circled)

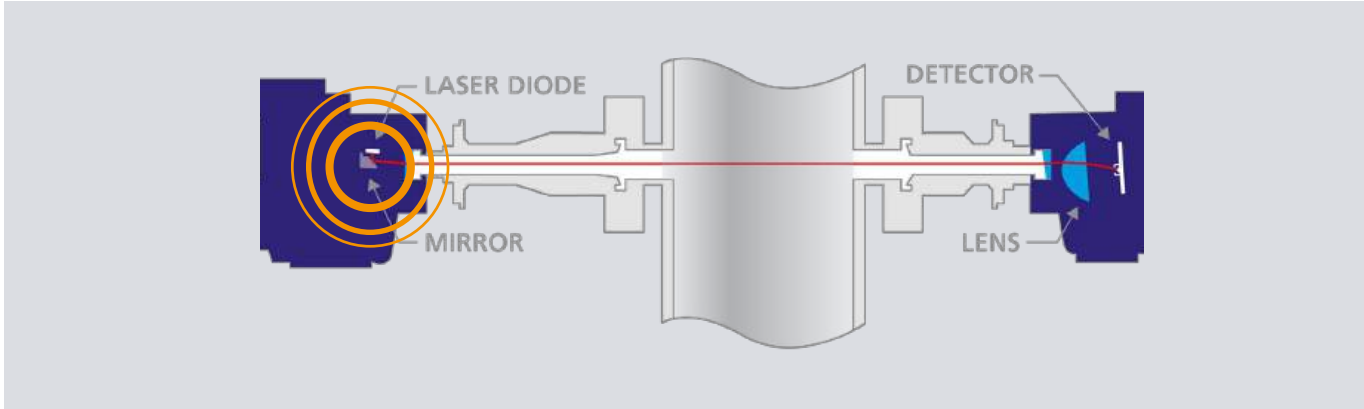

Tunable Diode Laser

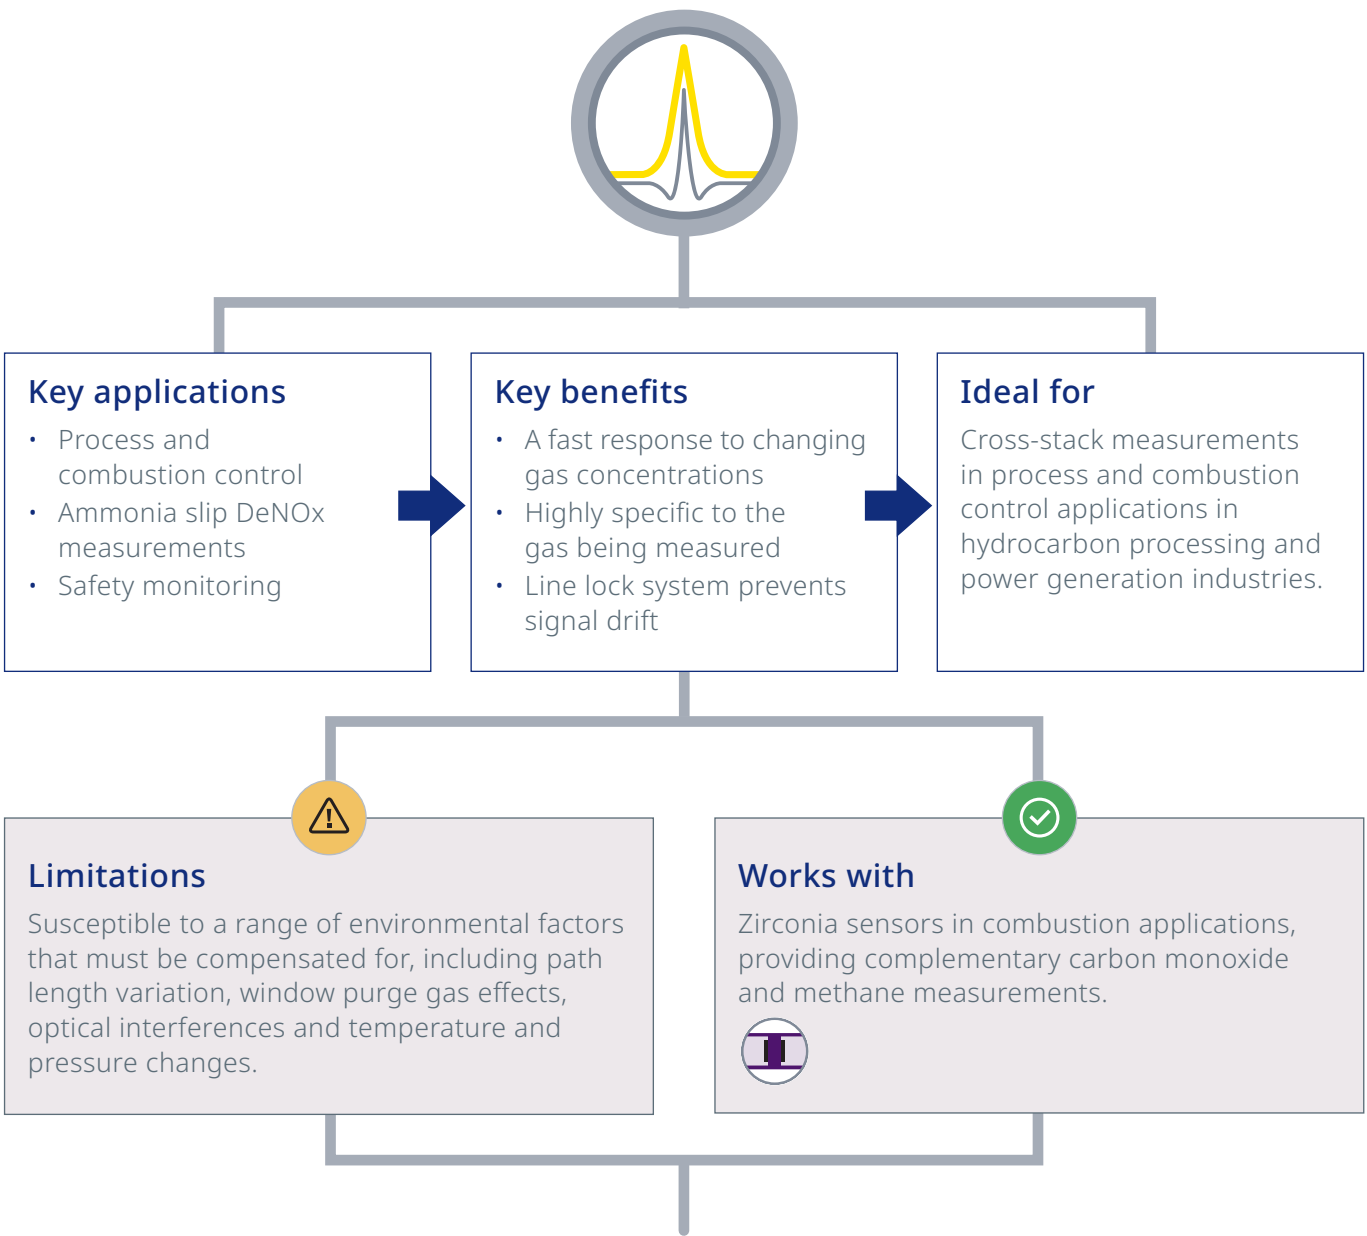

Used in



A trusted and accurate oxygen measurement

Our Zirconia sensor consists of a cell made of ceramic zirconium oxide, stabilized with an oxide of yttrium or calcium to form a lattice structure. The cell is coated with a conductive coating that serve as electrodes on both sides of the lattice.

At temperatures above 700°C (1292°F), the openings in the lattice permit the passage

of oxygen (O₂) ions at a rate determined by temperature and the difference in the O₂ partial pressures of the sample gas and the reference gas.


The passage of the ions produces a voltage across the electrodes – the magnitude of this is a logarithmic function of the ratio of the O₂ partial pressures of the sample and reference gases.

Since the partial pressure of the reference gas is predetermined, the voltage produced by the cell indicates the O₂ content of the sample gas.

Hummingbird Zr700 sensor



Zirconia

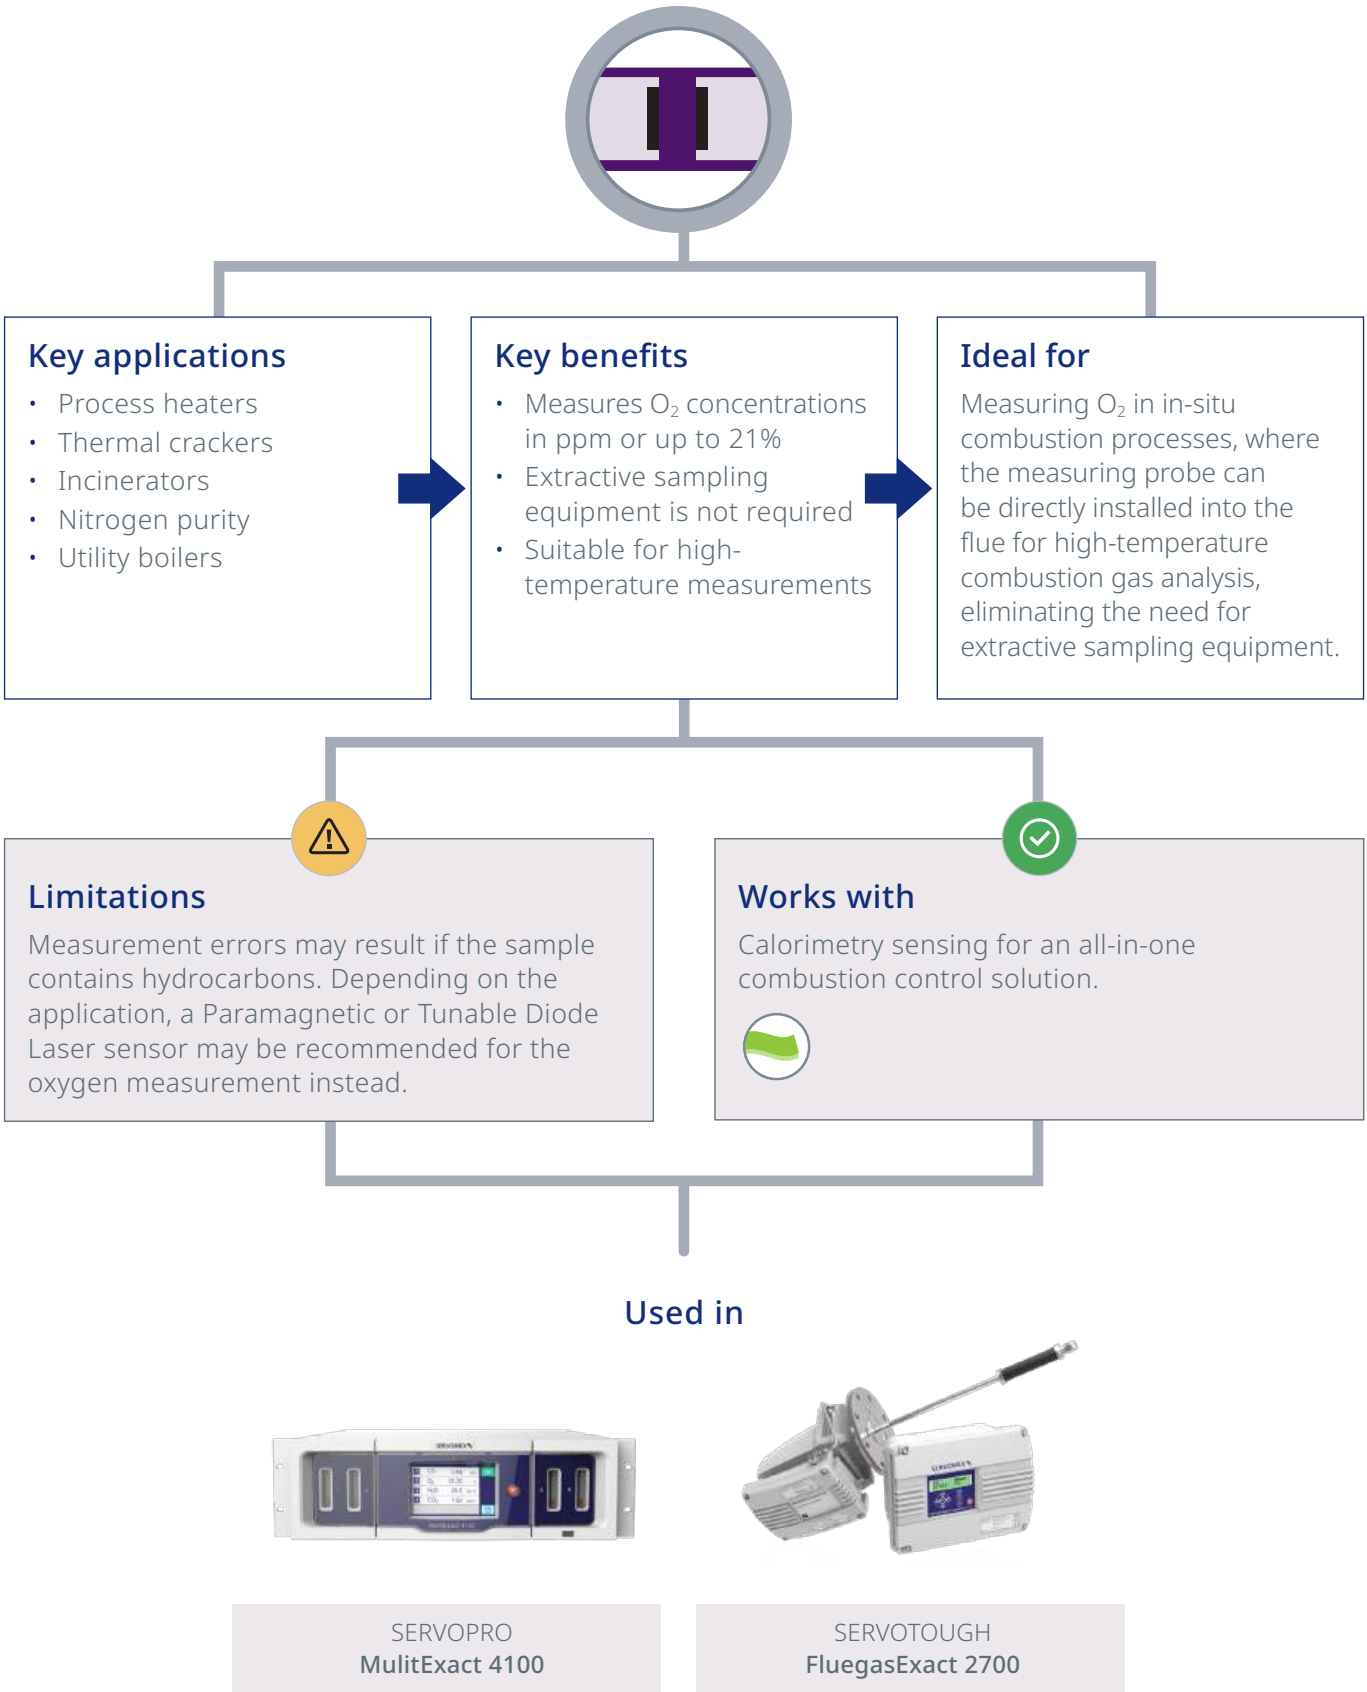

Next-generation reliability: The Gen-7 DF-500 Range

Powered by our industry-leading coulometric sensors, the DF-500 Series offers leading oxygen impurity detection for semiconductor and electronic-grade gas industries, with premium performance in a range of background gases.

The new, redesigned seventh-generation (Gen-7) models are even more reliable and easy to use, with a range of key improvements to meet the demands of modern applications.

An all-digital design and solid-state storage have enhanced the reliability of our DF-500 analyzers, ensuring they are ready to face process challenges for years to come.

The simplified design makes the analyzers easier to maintain, and improves field serviceability. Combined with non-depleting sensor technology and extended calibration intervals, the Gen-7 DF-500 Range offers a low lifetime cost of ownership with minimal ongoing maintenance requirements.

Ease of use is an essential part of the Gen-7 redevelopment, and each DF-500 now has a bigger, multi-coloured screen and larger keypad buttons, making it more user-friendly and simpler to operate.

With our upgraded analyzers, you can monitor the trace analysis of ultra-high-purity gas more effectively, with advanced software features, including status indicators, data logging, and run chart display, helping you work smarter and respond faster.

In addition, backward compatibility with previous-generation products enables rapid integration into existing applications.

Industry-best lower detection limits make the DF-500 range ideal for key oxygen measurement applications including quality control checks for electronics-grade gases, and leak detection for electronics-grade gas lines.

Gen-7
COMING
2024



Performance		
Range	DF-550E: 0-20ppb to 0-10ppm	DF-560E Ultra: 0-1ppb to 0-20ppm
Lower detection limit	DF-550E: 200ppt	DF-560E Ultra: 45ppt
Accuracy	±3% of reading/±3% of measurement range or ±0.1ppb	
Zero drift/month	Negligible	
T ₉₀ in seconds	<15 at 0.7 litres/min	

Key applications

- Continuous quality control monitoring
- Inert gas control checks for electronics-grade gases
- Post-purifier quality certification
- Leak detection for electronics-grade gases
- High-purity monitoring on air separation units

Learn more about our next-generation reliability: servomex.com/df-500-series

Get crystal clear insights with the Gen-7 DF-500 series



**Gen-7
COMING
2024**

See the difference the Gen-7 DF-500 Series can make to quality control. These NanoTrace oxygen analyzers offer the lowest production detection limits for ultra-high-purity (UHP) gases, powered by our industry-leading coulometric sensor. You can monitor readings with a new larger display. Plus, troubleshoot faster with multi-coloured status indicators, run chart, and data download capabilities.

- **Industry-leading sensor**
- **Larger display & keypad**
- **New software features**
- **Backward compatibility**

Find out more at: servomex.com/df-500-series/

YOUR PRODUCT GUIDE

Developed and manufactured in our state-of-the-art technical centres in the UK and US, Servomex gas analyzers are hand-built to meet precise requirements. Every product we make is optimized to the need of each customer process.

Built around stable, accurate and reliable gas measurements provided by world-leading sensor technologies, our analyzers incorporate the latest advances in hardware design and software control.

These are incorporated into resilient designs for use in a range of environments, with our SERVOTOUGH range focused on hazardous area applications, SERVOPRO products for safe areas, and SERVOFLEX portable products.

With a variety of analog and digital communication options, Servomex analyzers can be easily integrated into existing systems. They can also be designed into a complete, fully customized gas analysis system, developed and built to the same high standards by our global network of systems integration facilities.

Because we offer the widest selection of gas analysis technologies, you can be sure of finding the best fit for your application. In this section, you'll discover the complete range of Servomex products. If you need more help, you can narrow down the search on our website at servomex.com/gas-analyzers/finder



SERVOTOUGH

Oxy 1900

Hazardous area



AWARD-WINNING PARAMAGNETIC DIGITAL O₂ ANALYZER DESIGNED FOR HAZARDOUS AREA USE

Offering industry-standard features alongside revolutionary, value-added options, the Oxy 1900 O₂ gas analyzer sets new standards for flexibility, measurement stability and reliability from a single, cost-effective unit. Operating in hazardous areas, this Paramagnetic oxygen analyzer frequently serves in critical processes where optimum uptime is essential. Because of the challenging environments, regular servicing and calibration are recommended to assure reliable accuracy. Available in standard variant and user-configured options.

APPLICATIONS

- Process control
- Safety-critical oxidation, such as ethylene oxide and propylene oxide purity
- Flare stack analysis
- Vapor recovery

FEATURES AND BENEFITS

- Certified to Zone 1/Division 1 hazard-rated locations, to ATEX Cat 2, IECEx, CML (Japan) and FM/CSA Class 1 Division 1
- Allows sampling of flammable and non-flammable gas mixtures containing up to 21% O₂ at up to 18psia sample pressure
- Heated sample gas compartment provides improved measurement performance with optional sample heater for simplified sample conditioning system design
- Unique Servomex Flowcube flow sensor technology for improved safety
- Internal sample pressure compensation option available for improved measurement performance
- RS485 Modbus communications available as standard, Ethernet TCP/IP modbus as an option
- SIL 2 (Route 1H) hardware compliant

MAINTENANCE REQUIREMENTS

- Periodic calibrations on zero and span to ensure measurement accuracy
- Flow alarm calibration validation as required
- Perform compensated pressure calibration checks as required
- Test all relays and 4-20mA outputs, making adjustments as required

Gas	Measures	Application
Oxygen	Percent	Process Control Safety

Sensing technology



Suggested service products

Factory Acceptance Testing	Commissioning
Training	Spares
On-site Service Support	Health Check

Download product brochure.
Scan the QR code or visit servomex.com/1900



SERVOTOUGH
OxyExact 2200
Hazardous area



HIGH-SPEC PROCESS OXYGEN (O₂) ANALYZER OFFERS SAFE OR HAZARDOUS AREA CONTROL WITH UP TO SIX TRANSMITTERS

The OxyExact 2200 high-specification O₂ analyzer offers an unrivaled combination of precision, flexibility and performance for optimum process and safety control. The OxyExact 2200 can be configured with a Zone 1 or Zone 2 hazardous area control unit, with up to six transmitters per control unit. This rugged analyzer is frequently used in safety and process control applications, typically in challenging environments. It requires periodic calibration checks to ensure ongoing accuracy and reliability. Available in standard variant and user-configured options.

APPLICATIONS

- Oxidation control reactions
- EO, PTA and EDC manufacturing
- Catalyst regeneration
- Solvent recovery

FEATURES AND BENEFITS

- Zone 1 certified to ATEX Cat 2, IECEx, CML (Japan) and FM/CSA Class 1 Division 1
- Transmitters and Control units are available in preconfigured discounted standard variant build options, or bespoke user-configurable build option
- Up to six transmitters can be connected to one control unit
- Control units use an option card based I/O system to allow expansion of I/O to suit system requirements
- Transmitter three-enclosure systems allow sampling of flammable and non-flammable gas mixtures gas up to 100% O₂ up to 18psia sample pressure, and 21% O₂ at higher sample pressures of up to 45psia
- High-temperature transmitter eliminates the need to condense hot wet samples prior to analysis
- Transmitter units SIL 2 (Route 1H) hardware compliant

MAINTENANCE REQUIREMENTS

- Periodic calibrations on zero and span to ensure measurement accuracy
- Flow alarm calibration validation as required
- Perform compensated pressure calibration checks as required
- Test all relays and 4-20mA outputs, making adjustments as required

Gas	Measures	Application
Oxygen	Percent	Process Control Safety

Sensing technology



Suggested service products	
Factory Acceptance Testing	Commissioning
Training	Spares
On-site Service Support	Health Check

SERVOTOUGH
SpectraExact 2500
Hazardous area



RUGGED PHOTOMETRIC GAS ANALYZER FOR DEMANDING PROCESS APPLICATIONS

Servomex's iconic industry-leading Photometric analyzer delivers flexible gas analysis capability for flammable sample streams. The SpectraExact 2500's reliable, accurate and stable real-time online process analysis makes it ideal for a range of process, combustion and emissions gas analysis applications.

APPLICATIONS

- Ethylene production
- EDC production
- Carbon capture
- Direct reduction iron

FEATURES AND BENEFITS


- UKCA, CE, ATEX, UKEx, IECEx and North American hazardous area approvals
- Robust and high-performance NDIR analyzer for industrial and process applications
- Non-contact analysis, with the sample cell segregated from the electronics for ease of maintenance and safe operation

MAINTENANCE REQUIREMENTS

- Perform annual service, calibration, and validation
- Check diagnostics and condition of cell windows, source voltage, detector, etc.
- Replace scrubbers and seals as required
- Periodically replace chopper motor, source and detector to achieve maximum performance and uptime

Gas	Measures	Application
Toxic Flammable Corrosive	Percent ppm	Process Control
Liquids	Measures	Application
Toxic Flammable Corrosive	ppm	Process Control

Sensing technology



Suggested service products	
Uptime+ Service Plan	Factory Acceptance Testing
Commissioning	Training
Spares	Uptime+ Service Contracts
On-site Service Support	Health Check

Download product brochure.
Scan the QR code or visit servomex.com/2200



Download product brochure.
Scan the QR code or visit servomex.com/2500





Accurate liquid water measurements in EDC



The SERVOTOUGH SpectraExact 2500F photometric analyzer delivers precise and stable measurements of liquid water in EDC.

Our high performance infrared sensing technology is ideal for tough measurements in demanding conditions, where reliability matters.

- Designed to handle flammable and corrosive samples
- Certified for hazardous areas
- Low maintenance requirements

SERVOTOUGH FluegasExact 2700

Hazardous area



ADVANCED FLUE GAS ANALYZER FOR HIGH-TEMPERATURE MEASUREMENT OF OXYGEN (O₂) AND COMBUSTIBLES

Designed to measure O₂ and COe in flue gases for improved combustion efficiency and reduced emissions, the FluegasExact 2700 gas analyzer is designed to suit the most demanding needs of combustion efficiency applications in the power generation and process industries. Constantly exposed to high-temperature conditions, this advanced combustion flue gas analyzer needs regular checks and preventative maintenance to ensure the highest accuracy and optimum uptime.

APPLICATIONS

- Process heaters
- Utility boilers
- Thermal crackers
- Crematoria and incinerators

FEATURES AND BENEFITS

- Safe Area, ATEX Cat. 3, IECEx Zone 2 and North America Class 1, Division 2 options
- Unique Flowcube flow sensor technology enables positive flow conditions to be validated with optional flow alarm
- The combustibles sensor is sulfur-resilient, enabling operation in flue gases with elevated sulfur levels
- Close-coupled extractive measurement principle
- Flame traps incorporated as standard within sample compartment for process protection
- Wide selection of probe lengths and materials available

MAINTENANCE REQUIREMENTS

- Perform annual service, calibration and validation
- Check diagnostics, condition, and performance of analyzer
- Carry out preventative maintenance, replacing cells, aspirator, filters and probes as required

Gas	Measures	Application
Oxygen	Percent	Process Control
Combustibles	Trace ppm	Combustion

Sensing technology



Suggested service products	
Uptime+ Service Plan	Factory Acceptance Testing
Commissioning	Training
Spares	Uptime+ Service Contracts
On-site Service Support	

Analysis that **empowers**

SERVOMEX
a spectris company

Learn more at servomex.com

Download product brochure.
Scan the QR code or visit servomex.com/2700



SERVOTOUGH

Laser 3 Plus Environment

Hazardous area



COMPACT AMMONIA (NH₃) MEASUREMENT, OPTIMIZED FOR AMMONIA SLIP DENOX APPLICATIONS

This Tunable Diode Laser (TDL) analyzer, specifically optimized for ammonia slip measurement, provides all the benefits of Servomex's TDL technology in a compact, light unit, offering unparalleled installation flexibility plus cost and performance benefits.

- APPLICATIONS
- Process heaters
 - Incinerators
 - Power stations
 - Furnaces
 - Thermal oxidizers

- FEATURES AND BENEFITS
- High measurement reliability utilizing Servomex's own line lock cuvette technology
 - ATEX, IECEx and North American hazardous area approvals
 - A compact analyzer specifically optimized for the fast, accurate and responsive measurement of NH₃
 - Auto-validation feature provides complete assurance of ongoing measurement accuracy
 - Meets all uptime and performance requirements for the US EPA PS18 standard for reliable CEMS monitoring of NH₃

- MAINTENANCE REQUIREMENTS
- Annual preventative maintenance is a basic requirement
 - Perform measurement validation and check status history
 - Validate the purge flows, health of windows and overall alignment of the analyzer to achieve maximum uptime and measurement accuracy
 - Check and replace flange O-rings as required

Gas	Measures	Application
Ammonia DeNOx Environmental NH ₃	Trace ppm	Process Control Emissions

Sensing technology

Tunable Diode Laser

Suggested service products

Uptime+ Service Plan

Factory Acceptance Testing

Commissioning

Training

Spares

Health Check

On-site Service Support

Rentals

Download product brochure.
Scan the QR code or visit servomex.com/l3environmental



SERVOTOUGH

Laser 3 Plus Combustion

Hazardous area



COMPACT COMBUSTION ANALYZER OPTIMIZED FOR CO, O₂, OR CO + CH₄ MEASUREMENTS

Containing all the benefits of Servomex's Tunable Diode Laser (TDL) technology in a light, compact unit, with unmatched installation flexibility plus cost and performance benefits, this analyzer is optimized for fast, accurate and responsive measurements in combustion and process control, making it a must for safety applications.

- APPLICATIONS
- Process heaters
 - Incinerators
 - Power stations
 - Furnaces
 - ESP protection
 - Thermal oxidizers

- FEATURES AND BENEFITS
- High safety integrity utilizing Servomex's own line lock cuvette technology
 - Compact size means quick and easy installation by one person with on-board display negating the need for laptop configuration
 - ATEX, IECEx and North American hazardous area approvals. Approved for process Zone 2. SIL 2 assessed and CE marked
 - Auto-validation feature provides complete assurance of ongoing measurement accuracy

- MAINTENANCE REQUIREMENTS
- Annual preventative maintenance is a basic requirement
 - Perform measurement validation and check status history
 - Validate the purge flows, health of windows and overall alignment of the analyzer to achieve maximum uptime and measurement accuracy
 - Check and replace flange O-rings as required

Gas	Measures	Application
Oxygen Carbon Monoxide Carbon Monoxide + Methane	Percent Trace ppm	Process Control Combustion

Sensing technology

Tunable Diode Laser

Suggested service products

Uptime+ Service Plan

Factory Acceptance Testing

Commissioning

Training

Spares

Health Check

On-site Service Support

Rentals

Download product brochure.
Scan the QR code or visit servomex.com/l3combustion



SERVOTOUGH
Laser 3 Plus Process

Hazardous area



COMPACT TUNABLE DIODE LASER (TDL) GAS ANALYZER, OPTIMIZED FOR PROCESS O₂ MEASUREMENTS

All the benefits of Servomex's TDL technology in a small, light unit offering unparalleled installation flexibility plus cost and performance benefits. Optimized for the fast, accurate and responsive measurement of process oxygen in hot or hazardous conditions.

APPLICATIONS

- Oxidation control
- Inerting
- Safety monitoring
- Flare gas monitoring
- Combustion control (<500°C, 932°F)
- Coal to chemical

FEATURES AND BENEFITS


- High safety integrity utilizing Servomex's own line lock cuvette technology
- ATEX, IECEx and North American hazardous area approvals. Approved for process Zone 2. SIL 2 assessed and CE marked
- Quick and easy installation by one person with on-board display negating the need for laptop configuration
- Auto-validation capability provides complete assurance of ongoing measurement accuracy

MAINTENANCE REQUIREMENTS

- Annual preventative maintenance is a basic requirement
- Perform measurement validation and check status history
- Validate the purge flows, health of windows and overall alignment of the analyzer to achieve maximum uptime and measurement accuracy
- Check and replace flange O-rings as required

Gas	Measures	Application
Oxygen	Percent	Process Control Combustion

Sensing technology



Suggested service products	
Uptime+ Service Plan	Factory Acceptance Testing
Commissioning	Training
Spares	Health Check
On-site Service Support	Rentals

Download product brochure.
Scan the QR code or visit servomex.com/l3process



SERVOPRO Safe area

SERVOPRO
AquaXact 1688

Safe area



A FAST, ACCURATE AND RESILIENT MOISTURE MEASUREMENT SOLUTION

The AquaXact 1688 is a rugged ultra-thin film Aluminum Oxide moisture sensor that enables the measurement of moisture in a wide variety of gas phase process applications, such as glove boxes, air separation units, regenerative skid dryers, combustion, and instrument air, with no calibration required after dry-out. The sensor must have its performance validated annually – if out of specification, a sensor tip replacement or span point calibration is required. Annual tip replacement may be needed to meet NIST traceable requirements.

APPLICATIONS

- Glove boxes
- Solder reflow ovens
- Compressed air generation
- Ethylene production

FEATURES AND BENEFITS


- Functions as a standalone 4-20mA transmitter or remotely interfaces with our digital controller, SERVOPRO MonoExact DF310E and SERVOPRO MultiExact 4100
- NIST-traceable field-replaceable sensor element for seamless recalibration
- Stainless steel, weatherproof casing enables operation in ambient temperatures ranging from -10°C to +70°C (14°F to 158°F)

MAINTENANCE REQUIREMENTS

- Validate the performance of the transmitter yearly
- Replace the sensor tip or perform a span point calibration if out of specification
- Annual tip replacement is recommended to ensure the analyzer meets NIST traceable requirements (if applicable)

Gas	Measures	Application
Moisture	Dew Point ppmv	Process Control

Sensing technology



Suggested service products

Uptime+
Service Contracts



Service Centre
Support



Spares



Rentals



SERVOPRO
MonoExact DF150E

Safe area



TOUCHSCREEN-OPERATED PARTS-PER-MILLION (PPM) OXYGEN (O₂) ANALYZER FOR GENERAL INDUSTRIAL APPLICATIONS

With a digital touchscreen and icon-driven guided user interface (GUI) for easier operation, the MonoExact DF150E combines the reliability of Servomex's tried and tested Coulometric O₂ sensor with a more user-friendly package. Exposure to dry gas for an extended period extracts water from the sensor, so the sensor electrolyte must be replenished regularly to ensure optimum performance and long-term reliability. Available in standard variant and user-configured options.

APPLICATIONS

- Glove boxes
- Heat treating
- Solder reflow ovens
- Industrial gas production

FEATURES AND BENEFITS

- Updated digital sensor includes new operation and maintenance features that reduce cost of ownership
- Digital analyzer with self-diagnostic smart operating system monitors itself, so you can better manage your process
- Servomex proprietary software makes reporting and parameter control simple

MAINTENANCE REQUIREMENTS

- Routine preventative maintenance, adding replenishment solution to the electrolyte as required to maintain optimum performance and long-term reliability
- Perform periodic span calibration/validation to ensure measurement accuracy
- Review zero and span reference values for quality of calibration

Gas	Measures	Application
Oxygen	Trace ppm Ultra-Trace ppm	Process Control Quality

Sensing technology



Suggested service products

Uptime+
Service Plan



Commissioning



Spares



Uptime+
Service Contracts



On-site Service
Support



Rentals



Download product brochure.
Scan the QR code or visit servomex.com/1688



Download product brochure.
Scan the QR code or visit servomex.com/df150e



SERVOPRO

MonoExact DF310E

Safe area

NEXT-GENERATION DIGITAL OXYGEN (O₂) ANALYZER DESIGNED FOR INDUSTRIAL GAS APPLICATIONS

Designed specifically for accurate measurements of O₂ in industrial gas applications, the MonoExact DF310E is a next-generation digital O₂ analyzer that combines precision trace-level measurement with a new icon-driven guided user interface (GUI) and advanced digital communications. This digital oxygen analyzer’s coulometric sensor requires regular addition of replenishment solution to the electrolyte in order to deliver continued reliability and accuracy. Span calibration and validation is also needed as an accuracy check. Available in standard variant and user-configured options.

APPLICATIONS

- Air separation units
- Medical/industrial gases
- Specialty gas blending

FEATURES AND BENEFITS


- Advanced touchscreen GUI for intuitive setup and operation; now with favorite icon page and text over icon display
- Digital analyzer with self-diagnostic smart operating system monitors itself, so you can better manage your process
- SERVOPRO AquaXact 1688 Aluminum Oxide sensor is optional for simultaneous O₂ and H₂O monitoring
- RS232, RS485, Modbus, PROFIBUS and Ethernet Modbus TCP/IP

MAINTENANCE REQUIREMENTS

- Routine preventative maintenance, adding replenishment solution to the electrolyte as required to maintain optimum performance and long-term reliability
- Perform periodic span calibration/validation to ensure measurement accuracy
- Review zero and span reference values for quality of calibration

Gas	Measures	Application
Oxygen	Trace ppm	Process Control
Moisture	Ultra-Trace ppm	Quality
	Dew Point	
	ppmv	

Sensing technology

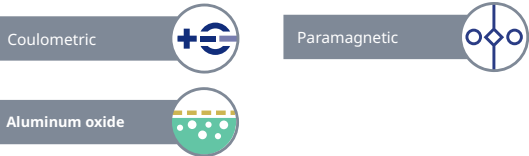

Download product brochure.
Scan the QR code or visit servomex.com/df310e



SERVOPRO

MultiExact 4100

Safe area

A SOPHISTICATED, NEXT-GENERATION MULTI-GAS ANALYZER PROVIDING A HIGHLY ADAPTABLE ANALYSIS SOLUTION

The MultiExact 4100 is a high-performance multi-gas analyzer designed to provide up to four simultaneous gas stream measurements including: O₂ (trace, control, and purity), CO₂, CO, N₂O, CH₄ (trace) and H₂O. Capable of being configured with a range of sensors, this analyzer requires annual calibration and validation, plus the regular replacement of consumables. Routine planned maintenance after three and five years ensures optimum performance and reduced downtime.

APPLICATIONS

- Product purity on air separation plants
- Process control on air separation plants
- Monitor trace CO₂ on scrubbed air inlet to air separation process
- Validation of medical O₂, N₂ and air

FEATURES AND BENEFITS


- Comprehensive solution for industrial and medical gas manufacture and for pharmacopeia applications
- Integrated support for the AquaXact 1688 Aluminum Oxide moisture transmitter
- Uses ultra-stable, non-depleting digital sensing technologies that help extend maintenance intervals

MAINTENANCE REQUIREMENTS

- Annual calibration and validation
- Pressure compensation (O₂ purity)
- Record and analyze diagnostics to predict failures early
- Yearly replacement of consumables
- Routine planned maintenance at years three and five to ensure optimum performance and reduced downtime

Gas	Measures	Application
Multitple	Percent	Process Control
	Trace ppm	Quality

Sensing technology

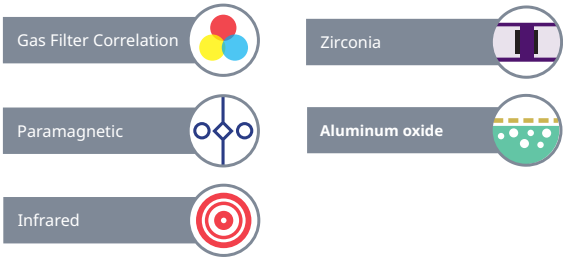

Download product brochure.
Scan the QR code or visit servomex.com/4100



SERVOPRO
MultiExact 4200

Safe area



A SOPHISTICATED, NEXT-GENERATION MULTI-GAS ANALYZER
PROVIDING A HIGHLY ADAPTABLE ANALYSIS OF FLAMMABLE GAS
SAMPLES FOR TRACE CONTAMINANTS IN INDUSTRIAL APPLICATIONS

The MultiExact 4200 is a high-performance multi-gas analyzer designed to provide up to four simultaneous gas stream measurements including: O₂ control, and trace CO₂, CO, N₂O and CH₄. This high-performance multi-gas analyzer should receive regular planned maintenance to ensure peak performance and minimal downtime. Annual calibration and validation, regular parts replacement, and servicing after three and five years are recommended.

APPLICATIONS

- Hydrogen production
- HyCO plants
- Syngas production

FEATURES AND BENEFITS

- Comprehensive solution for flammable gas contaminant monitoring
- Advanced digital communications including Ethernet (Modbus TCP/IP) and Modbus RS485
- Automated calibration/validation routines triggered by internal timer or external triggers
- Uses ultra-stable, non-depleting digital sensing technologies that help extend maintenance intervals
- Touchscreen GUI, now with favourite icon page and text over icon display

MAINTENANCE REQUIREMENTS

- Annual calibration and validation
- Pressure compensation (O₂ purity)
- Record and analyze diagnostics to predict failures early
- Yearly replacement of consumables
- Routine planned maintenance at years three and five to ensure optimum performance and reduced downtime

Gas	Measures	Application
Multitple	Percent	Process Control Quality

Sensing technology

Gas Filter Correlation

Paramagnetic

Suggested service products

Uptime+ Service Plan

Commissioning

Spares

Uptime+ Service Contracts

On-site Service Support

SERVOPRO
4900 Multigas

Safe area



AN ADVANCED DIGITAL MULTI-GAS CEMS ANALYZER

Specifically designed for Continuous Emissions Monitoring (CEMS) of flue gas, the 4900 Multigas provides up to four simultaneous gas stream measurements. It combines Servomex's leading-edge sensing technologies with a modern digital platform for next-generation performance. Any potential issues with this analyzer can be predicted early by recording and analyzing diagnostics. For reliable operation, consumables such as sample, fan, and sintered filters should be replaced annually, along with calibration, validation and pressure compensation.

APPLICATIONS

- Utility boilers
- Chemical incinerators
- Crematoria
- Mobile labs

FEATURES AND BENEFITS

- A comprehensive solution for CEMS analysis of multiple flue gas components
- Low maintenance and cost of ownership
- Advanced digital communications including Ethernet (Modbus TCP/IP), Modbus RS485 and PROFIBUS
- Automated calibration/validation routines triggered by internal timer or external triggers
- Touchscreen GUI, now with favourite icon page and text over icon display

MAINTENANCE REQUIREMENTS

- Annual calibration and validation
- Pressure compensation as required
- Record and analyze diagnostics to predict failures early
- Annual replacement of consumables
- Routine planned maintenance at years three and five to ensure optimum performance and reduced downtime

Gas	Measures	Application
Multitple	Percent Trace ppm	Emissions

Sensing technology

Gas Filter Correlation

Paramagnetic

Infrared

Suggested service products

Uptime+ Service Plan

Commissioning

Spares

Uptime+ Service Contracts

On-site Service Support

Rentals

Download product brochure.
Scan the QR code or visit servomex.com/4200



Download product brochure.
Scan the QR code or visit servomex.com/4900



SERVOPRO
Plasma
Safe area



RELIABLE MONITORING OF N₂ IN AR AND HE, OPTIMIZED FOR AIR SEPARATION UNIT (ASU) PLANT OPERATIONS

Specifically designed for the continuous monitoring of N₂ in Ar, the Plasma's non-depleting Plasma Emission Detector provides an accurate, highly stable and reliable measurement ideal for the requirements of ASU plant operators. Weekly calibration will ensure optimum performance from this analyzer. To predict future problems, regular checks of zero, span, and flow counts are recommended, plus a flow leak check, along with routine planned servicing.

- APPLICATIONS**
- Argon production
 - Truck loading
 - Pure gas bottling
 - Specialty gas laboratories



- FEATURES AND BENEFITS**
- Electrical safety to IEC 61010-1: Ed 3. In compliance with Low Voltage, EMC and applicable Directives
 - Wide measurement range – 0-1 ppm, 0-10 ppm, 0-100 ppm (higher on request)
 - Electronic flow control system for low flow consumption and reading stability

- MAINTENANCE REQUIREMENTS**
- Perform weekly calibration
 - Routine planned maintenance at years two, four, and five to ensure optimum performance and reduced downtime

Gas	Measures	Application
Nitrogen	Trace ppm	Quality

 Sensing technology




Suggested service products	
 Uptime+ Service Plan	 Factory Acceptance Testing
 Spares	 Uptime+ Service Contracts
 On-site Service Support	 Rentals

Download product brochure.
Scan the QR code or visit servomex.com/plasma



SERVOPRO
FID
Safe area

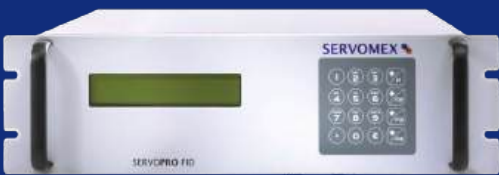

TRACE HYDROCARBON ANALYZER IDEAL FOR AIR SEPARATION UNITS (ASU) SAFETY AND QUALITY CONTROL APPLICATIONS

A Flame Ionization Detector analyzer designed to assure safe operation for cryogenic ASUs, the FID ensures the level of Total Hydrocarbons (THC) is maintained below flammable limits, as well as providing quality control in pure O₂, N₂, Ar, air, He and CO₂. Regular calibration will ensure continued accurate performance. The zero and span counts must be checked for gain, and then adjusted to offset this.


- APPLICATIONS**
- Cryogenic air separation
 - Process control
 - Food gas manufacture
 - Product validation


- FEATURES AND BENEFITS**
- Electrical safety to IEC 61010-1. In compliance with Low Voltage, EMC and applicable directives
 - Excellent output resolution over three operating ranges
 - Electronic flow controllers for air, fuel and sample for no dependency to atmospheric pressure variations and inlet pressure variation

- MAINTENANCE REQUIREMENTS**
- Check zero and span counts, gain and offset
 - Adjust calibration frequency as required

Gas	Measures	Application
Total Hydrocarbons	Trace ppm	Safety Quality

 Sensing technology



Suggested service products	
 Uptime+ Service Plan	 Factory Acceptance Testing
 Spares	 Uptime+ Service Contracts
 On-site Service Support	 Rentals

Download product brochure.
Scan the QR code or visit servomex.com/fid



SERVOPRO
Chroma
Safe area



HIGHLY VERSATILE TRACE GAS ANALYZER PLATFORM CONFIGURABLE TO A WIDE RANGE OF APPLICATIONS

Offering a non-depleting Plasma Emission Detector (PED), Flame Ionization Detector (FID) and Thermal Conductivity Detector (TCD), the Chroma analyzer is one of the most versatile gas analyzers for trace gas measurement available. Most applications will be satisfied by a single 4U rack analyzer configuration, making the Chroma a compact, cost-effective solution for continuous process control or quality monitoring. It offers superior performance when supported by monthly calibration and measurement validation. Column regeneration should be carried out each year, with fans and filters cleaned regularly.

APPLICATIONS

- Medical gas production
- Air separation plants
- Cryogenic truck loading station
- High purity gas production

FEATURES AND BENEFITS


- Fully automated – tune to the application – system for unique simplicity of use
- Standalone system requires no third-party software or computer to operate
- For CH₄/NMHC measurements, the Plasma HC system requires no FID and therefore no H₂ fuel gas

MAINTENANCE REQUIREMENTS

- Perform monthly calibration
- Record and analyze diagnostics to predict failures early
- Regenerate columns and retune yearly
- Routine planned maintenance at years two, four and five to ensure optimum performance and reduced downtime

Gas	Measures	Application
Multitple	Percent Trace ppm Ultra-Trace ppm	Process Control Quality

Sensing technology

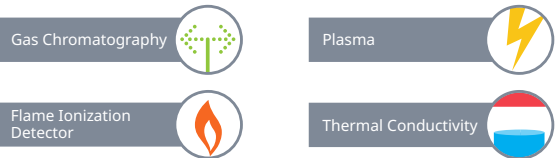

Suggested service products	
Uptime+ Service Plan	Factory Acceptance Testing
Commissioning	Training
Spares	Uptime+ Service Contracts
On-site Service Support	

SERVOPRO
NanoChrome
Safe area



SUB-PPB TRACE MEASUREMENT OF H₂, CH₄, CO, CO₂, N₂, AR, AND NMHC FOR THE SEMICONDUCTOR INDUSTRY

Incorporating the latest advances in gas sensing technology and signal processing methodology, the NanoChrome revolutionizes purity measurements for the semiconductor industry. It requires monthly calibration to ensure high accuracy, along with fan and filter cleaning. Measurements should be calibrated and validated, while diagnostics can be checked to determine any developing issues.

APPLICATIONS

- Semiconductor production – quality control measurements – stationary analytical systems
- UHP gas production – quality control measurements

FEATURES AND BENEFITS

- In compliance with Low Voltage, EMC and applicable directives
- Innovative Plasma Emission Detector (PED) sensor technology enables sub-ppb measurements of H₂, CH₄, CO, CO₂, N₂, Ar, and NMHC
- Enables unique total Servomex solution for UHP gas analysis

MAINTENANCE REQUIREMENTS

- Perform monthly calibration
- Record and analyze diagnostics to predict failures early
- Regenerate columns and retune yearly
- Routine planned maintenance at years two, four and five to ensure optimum performance and reduced downtime

Gas	Measures	Application
Multitple	Ultra-Trace ppb Ultra-Trace ppt	Quality

Sensing technology



Suggested service products	
Uptime+ Service Plan	Factory Acceptance Testing
Commissioning	Training
Spares	Uptime+ Service Contracts
On-site Service Support	

Download product brochure.
Scan the QR code or visit servomex.com/chroma



Download product brochure.
Scan the QR code or visit servomex.com/nanochrome



SERVOPRO
DF-500 Range

Safe area



LEADING ULTRA-TRACE PARTS-PER-TRILLION (PPT) OXYGEN (O₂) ANALYZER RANGE

The new Gen-7 DF-500 delivers ultra-trace O₂ measurement for ultra-high purity applications with improved user interface, software, and diagnostic functionality. The Gen-7 uses the same industry-leading coulometric O₂ sensor to measure O₂ down to the lowest ppt levels available. Consisting of the NanoTrace DF-550E and NanoTrace DF-560E ULTRA, the NanoTrace series delivers exceptional O₂ measurements at trace and ultra-trace ppt levels.

APPLICATIONS

- Continuous quality control monitoring
- Inert gases control checks for electronics grade gases
- Post purifier quality certification
- Leak detection for electronics grade gases

FEATURES AND BENEFITS

- The industry standard for the reliable measurement of O₂ in semiconductor manufacture
- Fast response and quick upset recovery ensures ultimate performance
- Options include flexible configurations hand-carry portable option and on-board calibration systems

MAINTENANCE REQUIREMENTS

- Perform annual calibration
- Record and analyze diagnostics (primary and secondary electrode measurements) to predict failures early
- Routine planned maintenance at year three to ensure optimum performance and reduced downtime

Gas	Measures	Application
Oxygen	Trace ppm	Quality
	Ultra-Trace ppb	
	Ultra-Trace ppt	

Sensing technology



Suggested service products	
Uptime+ Service Plan	Factory Acceptance Testing
Commissioning	Training
Spares	Uptime+ Service Contracts
On-site Service Support	Rentals

SERVOPRO
DF-700 Range

Safe area



TUNABLE DIODE LASER ABSORPTION SPECTROSCOPY TRACE MOISTURE ANALYZER RANGE

The new DF-700 Series Gen-7 is a sophisticated trace and ultra-trace moisture analyzer range combining new digital electronics with tried and tested sensing technology. Designed for manufacturability and repairability, it allows for field serviceability with many components able to be replaced in the field. Annual diagnostics analysis ensures this low-maintenance moisture analyzer maintains its uptime with no unexpected failures. Optional parts – such as a zero gas purifier and pump – may need replacement at regular intervals.

APPLICATIONS

- 740: Analysis of electronics-grade NH₃ specialty gas
- 745: Inert gases leak detection for LED and LCD plants
- 745 SGMax: Specialty gas cylinder quality control
- 749: HP bulk gases used in semiconductor applications
- 750: Bulk UHP gas CQC for semiconductor fabs
- 760E: O₂ and H₂O monitoring in UHP bulk gases used in semiconductor applications

FEATURES AND BENEFITS

- Exceptional range from 100ppt to 20ppm moisture level readings depending on the model
- New solid-state hard drive and CPU, including storage and recall function for archiving of operational history
- Designed with field service in mind: laser cell, SSD, CPU, PCBs, display, filter, and gas panel all easily replaced in situ

MAINTENANCE REQUIREMENTS

- Record and analyze diagnostics to predict failures early
- Routine planned maintenance at years two, three, and four to ensure optimum performance and reduced downtime

Gas	Measures	Application
Moisture	ppm	Quality
	Trace ppb	
	Ultra-Trace ppt	

Sensing technology



Suggested service products	
Uptime+ Service Plan	Factory Acceptance Testing
Commissioning	Training
Spares	Uptime+ Service Contracts
On-site Service Support	Rentals

Download product brochure.
Scan the QR code or visit servomex.com/df-500



Download product brochure.
Scan the QR code or visit servomex.com/df-700



SERVOPRO
NanoChrome ULTRA
Safe area



THE NUMBER ONE CHOICE FOR ULTRA-TRACE PURITY MEASUREMENTS IN THE SEMICONDUCTOR INDUSTRY

Delivering superior ultra-trace measurements of UHP gases in a wide range of background gases, the revolutionary NanoChrome ULTRA incorporates the latest advances in sensing and signal processing methodology, for exceptional performance. Monthly calibration and measurement validation keep this industry-leading ultra-trace gas analyzer at peak performance. Fans and filters should be cleaned regularly, while diagnostics should be checked to detect any developing issues.

APPLICATIONS

- Semiconductor production – quality control measurements – stationary analytical systems
- UHP gas production – quality control measurements

FEATURES AND BENEFITS

- Innovative high-sensitivity Plasma Emission Detector (PED) enables ultra-trace measurements of Ar, N₂, H₂, CH₄, CO, CO₂, and NMHC
- ProPeak peak detection technique enables unprecedented measurement sensitivity
- A complete stand-alone UHP gas analysis solution when combined with SERVOPRO DF-500 and SERVOPRO DF-700 analyzers

MAINTENANCE REQUIREMENTS

- Perform monthly calibration
- Record and analyze diagnostics to predict failures early
- Regenerate columns and retune yearly
- Routine planned maintenance at years two, four, and five to ensure optimum performance and reduced downtime

Gas	Measures	Application
Multiple	Ultra-Trace ppb Ultra-Trace ppt	Quality

Sensing technology



Suggested service products	
Uptime+ Service Plan	Factory Acceptance Testing
Commissioning	Training
Spares	Uptime+ Service Contracts
On-site Service Support	

Download product brochure.
Scan the QR code or visit servomex.com/nanochrome-ultra



SERVOPRO
NanoTrace DF-560E ULTRA
Safe area



MEASURES ULTRA-TRACE OXYGEN O₂ TO THE LOWEST LEVELS

Designed to measure ultra-trace O₂ to the ultra-low ppt levels demanded by the semiconductor sector, the DF-560E ULTRA delivers an industry-leading 45 ppt lower detection limit (LDL). Once the analyzer is measuring below 1 ppb, the units automatically convert to ppt for better resolution of the smallest of concentration movements. Annual calibration and regular replenishment of the coulometric sensor's electrolyte solution ensures this analyzer continues to deliver industry-leading ultra-trace oxygen measurements. Planned maintenance supports maximum uptime.

APPLICATIONS

- Continuous quality control monitoring
- Inert gases control checks for electronics grade gases
- Post-purifier quality certification
- Leak detection for electronics-grade gases

FEATURES AND BENEFITS

- Lowest level O₂ detection available to the semiconductor industry
- Automated maintenance performs zero and span calibrations on a scheduled basis
- Fast response and quick upset recovery ensures highly stable operation

MAINTENANCE REQUIREMENTS

- Perform annual calibration
- Record and analyze diagnostics (primary and secondary electrode measurements) to predict failures early
- Routine planned maintenance at year three to ensure optimum performance and reduced downtime

Gas	Measures	Application
Oxygen	Trace ppm Ultra-Trace ppb Ultra-Trace ppt	Quality

Sensing technology



Suggested service products	
Uptime+ Service Plan	Factory Acceptance Testing
Commissioning	Training
Spares	Uptime+ Service Contracts
On-site Service Support	Rentals

Download product brochure.
Scan the QR code or visit servomex.com/df-560e-ultra



SERVOPRO

NanoTrace DF-750 ULTRA

Safe area



THE FIRST CHOICE IN MOISTURE ANALYSIS FOR THE SEMICONDUCTOR INDUSTRY

A Tunable Diode Laser (TDL) based trace/ultra-trace analyzer, the DF-750 ULTRA delivers industry-best measurements of moisture as a contaminant in the UHP gases used in 300mm semiconductor fabs, with a lower detection limit (LDL) of 55 ppt. Using the new DF-700 Gen-7 digital electronics, it offers improved serviceability and field replacement for key components. This analyzer uses non-depleting sensing technology, for low maintenance and only annual diagnostics checks. If optional components such as a pump or zero gas purifier are fitted, they may need occasional replacement.

APPLICATIONS

- Continuous quality control of bulk UHP gases for semiconductor fabs

FEATURES AND BENEFITS

- Exceptional 55 ppt LDL delivers the sensitivity and precision demanded by semiconductor makers
- Water contact with optical components is minimized for optimum reliability
- Storage and recall function for archiving of operational history

MAINTENANCE REQUIREMENTS

- Record and analyze diagnostics to predict failures early
- Routine planned maintenance at years two, three and four to ensure optimum performance and reduced downtime

Gas	Measures	Application
Moisture	ppm Trace ppb Ultra-Trace ppt	Quality

Sensing technology



Suggested service products	
Uptime+ Service Plan	Factory Acceptance Testing
Commissioning	Training
Spares	Uptime+ Service Contracts
On-site Service Support	Rentals

SERVOPRO

NanoTrace DF-760E ULTRA

Safe area



MARKET-LEADING DUAL ANALYSIS OF OXYGEN (O₂) AND MOISTURE

Delivering an industry-leading lower detection limit (LDL) of 55 ppt for moisture and 45 ppt O₂ in the UHP gases used in <14 nm semiconductor fabs, the new DF-760E ULTRA Gen-7 is designed for manufacturability and repairability. A completely new digital electronic package offers enhanced field serviceability and parts replacement. Using both a coulometric and TDLAS sensor, this analyzer requires annual calibration of its O₂ sensor, along with regular replenishment of the sensor solution. Diagnostics analysis assures performance of the moisture sensor.

APPLICATIONS

- Monitoring O₂ and moisture as contaminants in UHP bulk gases used in semiconductor applications

FEATURES AND BENEFITS

- Industry-leading LDLs of 45 ppt O₂ and 55 ppt moisture
- Non-depleting sensing technologies reduce ongoing costs
- Easy operation via front panel or digital communication options

MAINTENANCE REQUIREMENTS

- Perform annual calibration (O₂ only, not for H₂O)
- Record and analyze diagnostics (primary and secondary electrode measurements) to predict failures early
- Routine planned maintenance at years two, three and four to ensure optimum performance and reduced downtime

Gas	Measures	Application
Moisture Oxygen	ppm Trace ppb Ultra-Trace ppt	Quality

Sensing technology



Suggested service products	
Uptime+ Service Plan	Factory Acceptance Testing
Commissioning	Training
Spares	Uptime+ Service Contracts
On-site Service Support	Rentals

Download product brochure.
Scan the QR code or visit servomex.com/df-750-ultra



Download product brochure.
Scan the QR code or visit servomex.com/df-760e-ultra



SERVOFLEX
Micro i.s. 5100
Portables



INTRINSICALLY SAFE ANALYZER THAT MEASURES OXYGEN (O₂)

Designed for the measurement of oxygen in potentially flammable gas samples, the intrinsically safe Micro i.s. 5100 is a unique analyzer certified to Zone 0 and Division 1 and suitable for measuring percent levels of O₂. This portable O₂ analyzer requires periodic zero and span calibrations to ensure measurement accuracy.

APPLICATIONS

- Process monitoring
- Inerting applications
- Controlled atmosphere monitoring
- Hazardous area combustion optimization

FEATURES AND BENEFITS

- Intrinsically safe design (Zone 0) to ATEX and IECEx standards, Division 1 to FM and CSA standards, ensures safety operation in hazardous environments
- IP65 rugged design and optional carry case allows for use in the most demanding environments
- Powered by integral rechargeable battery with up to 18-hour run time
- Ergonomic compact design ensures easy operation on the move
- Available in non-pump or internal pumped versions with optional sample conditioning kit

MAINTENANCE REQUIREMENTS

- Periodic calibrations on zero and span to ensure measurement accuracy
- Check and replace AFCD filter as required

Gas	Measures	Application
Oxygen	Percent	Process Control Safety

 Sensing technology

Paramagnetic



Suggested service products

Training



Spares



Service Centre Support



Rentals



Health Check



Download product brochure.
Scan the QR code or visit servomex.com/micro-i-s-5100



SERVOFLEX
MiniMP 5200
Portables



BENCHTOP ANALYZER OFFERING SINGLE OR DUAL MEASUREMENTS OF O₂ AND CARBON DIOXIDE (CO₂)

The only truly portable battery-powered gas analyzer with TÜV certification, the MiniMP 5200 is designed to offer single or dual measurement of O₂ and CO₂ by utilizing Servomex's advanced Paramagnetic and Infrared sensing technologies. Offering measurements of oxygen and carbon dioxide, this benchtop analyzer requires annual calibration checks and the testing of all outputs. Regular filter checks and replacement are also highly recommended to ensure peak performance. Available in standard variant and user-configured options.

APPLICATIONS

- Laboratories and research
- Air separation and gas bottling plants
- Transfilling
- Combustion analysis
- Medical gas verification

FEATURES AND BENEFITS

- TÜV QAL 1 makes the MiniMP ideal for source testers that require reference O₂ analysis for Continuous Emissions Monitoring Systems verification
- Li-ion battery system offers unique true portability
- Non-depleting sensor design ensures long service with minimal calibration

MAINTENANCE REQUIREMENTS

- Periodic calibrations on zero and span to ensure measurement accuracy
- Flow alarm calibration validation
- Perform compensated pressure calibration checks as required
- Test all relay and 4-20mA outputs, making adjustments as required
- Check and replace AFCD filter as required

Gas	Measures	Application
Oxygen Carbon Dioxide	Percent	Process Control Quality Emissions

Sensing technology

Paramagnetic



Infrared



Suggested service products

Training



Spares



Service Centre Support



Rentals



Health Check



SERVOFLEX
MiniHD 5200
Portables



PORTABLE GAS ANALYZER FOR MEASUREMENT OF COMMON GAS MIXTURES

Designed for use in field locations or light industrial applications, the MiniHD 5200 portable gas analyzer is a rugged, heavy duty analyzer designed to accurately measure the levels of O₂, CO or CO₂ within common gas mixtures. The MiniHD 5200 utilizes Servomex's non-depleting Paramagnetic or Infrared sensors to give dependable and accurate results. This analyzer should be tested regularly to ensure it delivers the expected high performance. Annual calibration checks and filter replacements are all recommended to maintain accuracy and reliability.

APPLICATIONS

- Physiology studies
- Universities
- Combustion optimization

FEATURES AND BENEFITS

- Robust IP65 construction meets the demanding needs of field location analysis
- Long life Li-ion rechargeable batteries and range of sampling options ensure ease of use
- Accurate measurement of O₂, CO, and CO₂ levels

MAINTENANCE REQUIREMENTS

- Periodic calibrations on zero and span to ensure measurement accuracy
- Check and replace AFCD filter as required

Gas	Measures	Application
Oxygen Carbon Monoxide Carbon Dioxide	Percent	Process Control Combustion Safety

Sensing technology

Paramagnetic



Infrared



Suggested service products

Training



Spares



Service Centre Support



Rentals



Health Check




Download product brochure.
Scan the QR code or visit servomex.com/minimp-5200



Download product brochure.
Scan the QR code or visit servomex.com/micro-i-s-5100



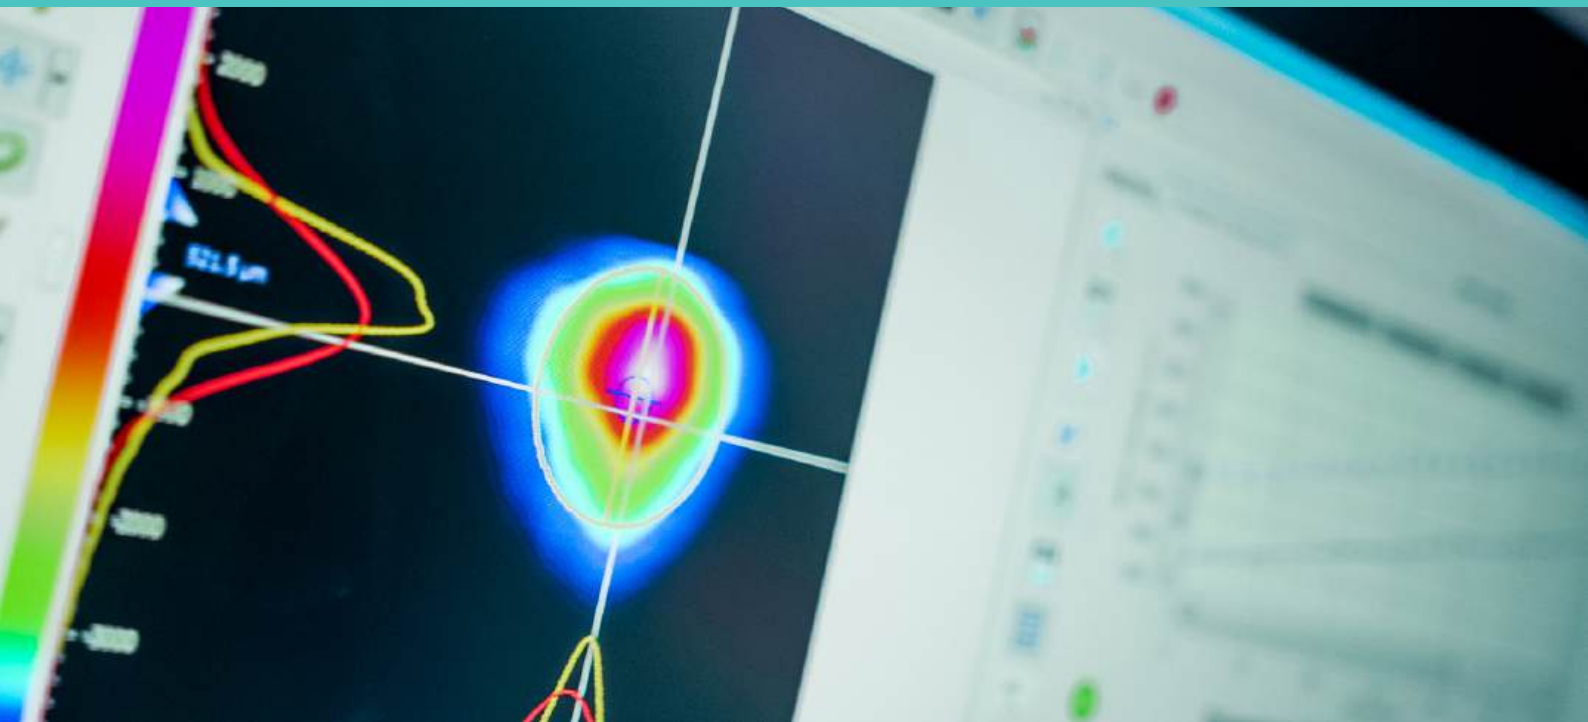

Expert solutions designed to match your needs

As global experts in gas analysis systems integration, Servomex designs and delivers the most accurate, reliable solutions available, across a wide range of industries.

Whether you need a single analyzer and sampling system, or multiple gas analyzers working together in a systems enclosure or rack, we can deliver. Our experts work with you to create a scalable system that meets your exact requirements and provides the precise measurements you need.

Each system is designed from the customer perspective. First, all the requirements are established, then we work together with the customer to find the best way to resolve their unique process challenges.

This collaborative approach, combined with our extensive systems expertise, transforms the way we create and deliver systems.

Our professional, knowledgeable, and experienced team has a product-focused methodology for delivering the best, most competitively priced solutions to our customers.

In addition, our gas analysis technologies offer the widest range available to the market from a single supplier – from Paramagnetic or Infrared to Gas Chromatography or Tunable Diode Laser, with direct measurements and extractive sampling.

This means customers are not limited to one or two options – we’re familiar with an extensive range of sensing technologies, so can ensure the best measurement technique is applied to each process.

Servomex provides global systems capability at a local level, including full support from our service network, which offers assistance from experts located close to your plant.

Our systems methodology is built around the process of ‘consult, design, deliver’. With this in mind, we are consistently able to build systems that work – reliably, accurately, and cost-effectively, with ease of use and maintenance at the forefront of our designs.

With proven experience across a wide range of industries, we deliver systems that transform your process

		Measurement type				
		Combustion	Emissions	Process control	Quality	Safety
IP&E	Chemicals	●	●	●	●	●
	Oil and Gas Upstream	●	●	●	●	●
	Petrochemicals	●	●	●	●	●
	Refining	●	●	●	●	●
	Power	●	●	●		
P&S	Industrial Gases (N ₂ , O ₂ , H ₂ , CO ₂)	●		●	●	●
	Semiconductor (UHP)			●	●	
	Pharmaceuticals		●	●	●	●



Contact our service team today: servomex.com/systems

Analyzers and Panels

Expert gas analysis instrumentation, and sampling systems for easy access to components for hassle-free calibration and maintenance

Our wide range of sensing technologies provides diverse, easy-to-use solutions for many industrial applications.

Features and benefits

- Optimized sampling and wiring for easy operation
- Keeps instrumentation in safe areas for maintenance
- Tailor-made to suit your application needs
- Fully integrated Servomex gas analysis technology



Enclosures

Enclosures ensure suitable weather protection for your system. Designed for hazardous areas

Rugged enclosed cabinets keep the instrumentation under controlled conditions for reliable, continuous performance, while allowing easy access for maintenance.

Features and benefits

- A complete system, designed into a protective cabinet
- Tailor-made to operate reliably in your process conditions
- Robust, high-quality materials
- Fully assembled, tested and certified



Racks

Systems integrating rack-mounted analyzers from our SERVOPRO and DF Ranges

Our rack systems locate multiple gas analyzers into a single cabinet for easy control of an array of gas analysis solutions.

Features and benefits

- Multiple analyzers working seamlessly and reliably
- Intelligent software for continuous monitoring
- Designed to meet stringent safety requirements
- A scalable solution, available as fixed racks or mobile carts



Continuous Quality Control

A sophisticated, next-generation multi-gas analyzer system providing gas analysis for trace contaminants in industrial gas applications

The revolutionary SERVOPRO Chroma gives stable ppb, ppm or % level measurements for CH₄, CO, CO₂, H₂, O₂, N₂, Ar, He, and NHMC. The industry-leading SERVOPRO MonoExact DF310E provides trace level oxygen and ppm and ppb moisture measurements. And the SERVOPRO MultiExact 4100 measures O₂ purity along with CO, CO₂ and CH₄ contaminants.


Features and benefits

- Unique single-manufacturer system for the Industrial Gas industry
- Monitors purity and trace impurities in all bulk inert and noble gases
- Utilizes Servomex's industry-leading analyzers
- Standard systems available, along with configurable selections for your precise stationary rack applications



Contact our service team today: servomex.com/systems

Follow the system journey, from initial consultation to design, test and delivery.

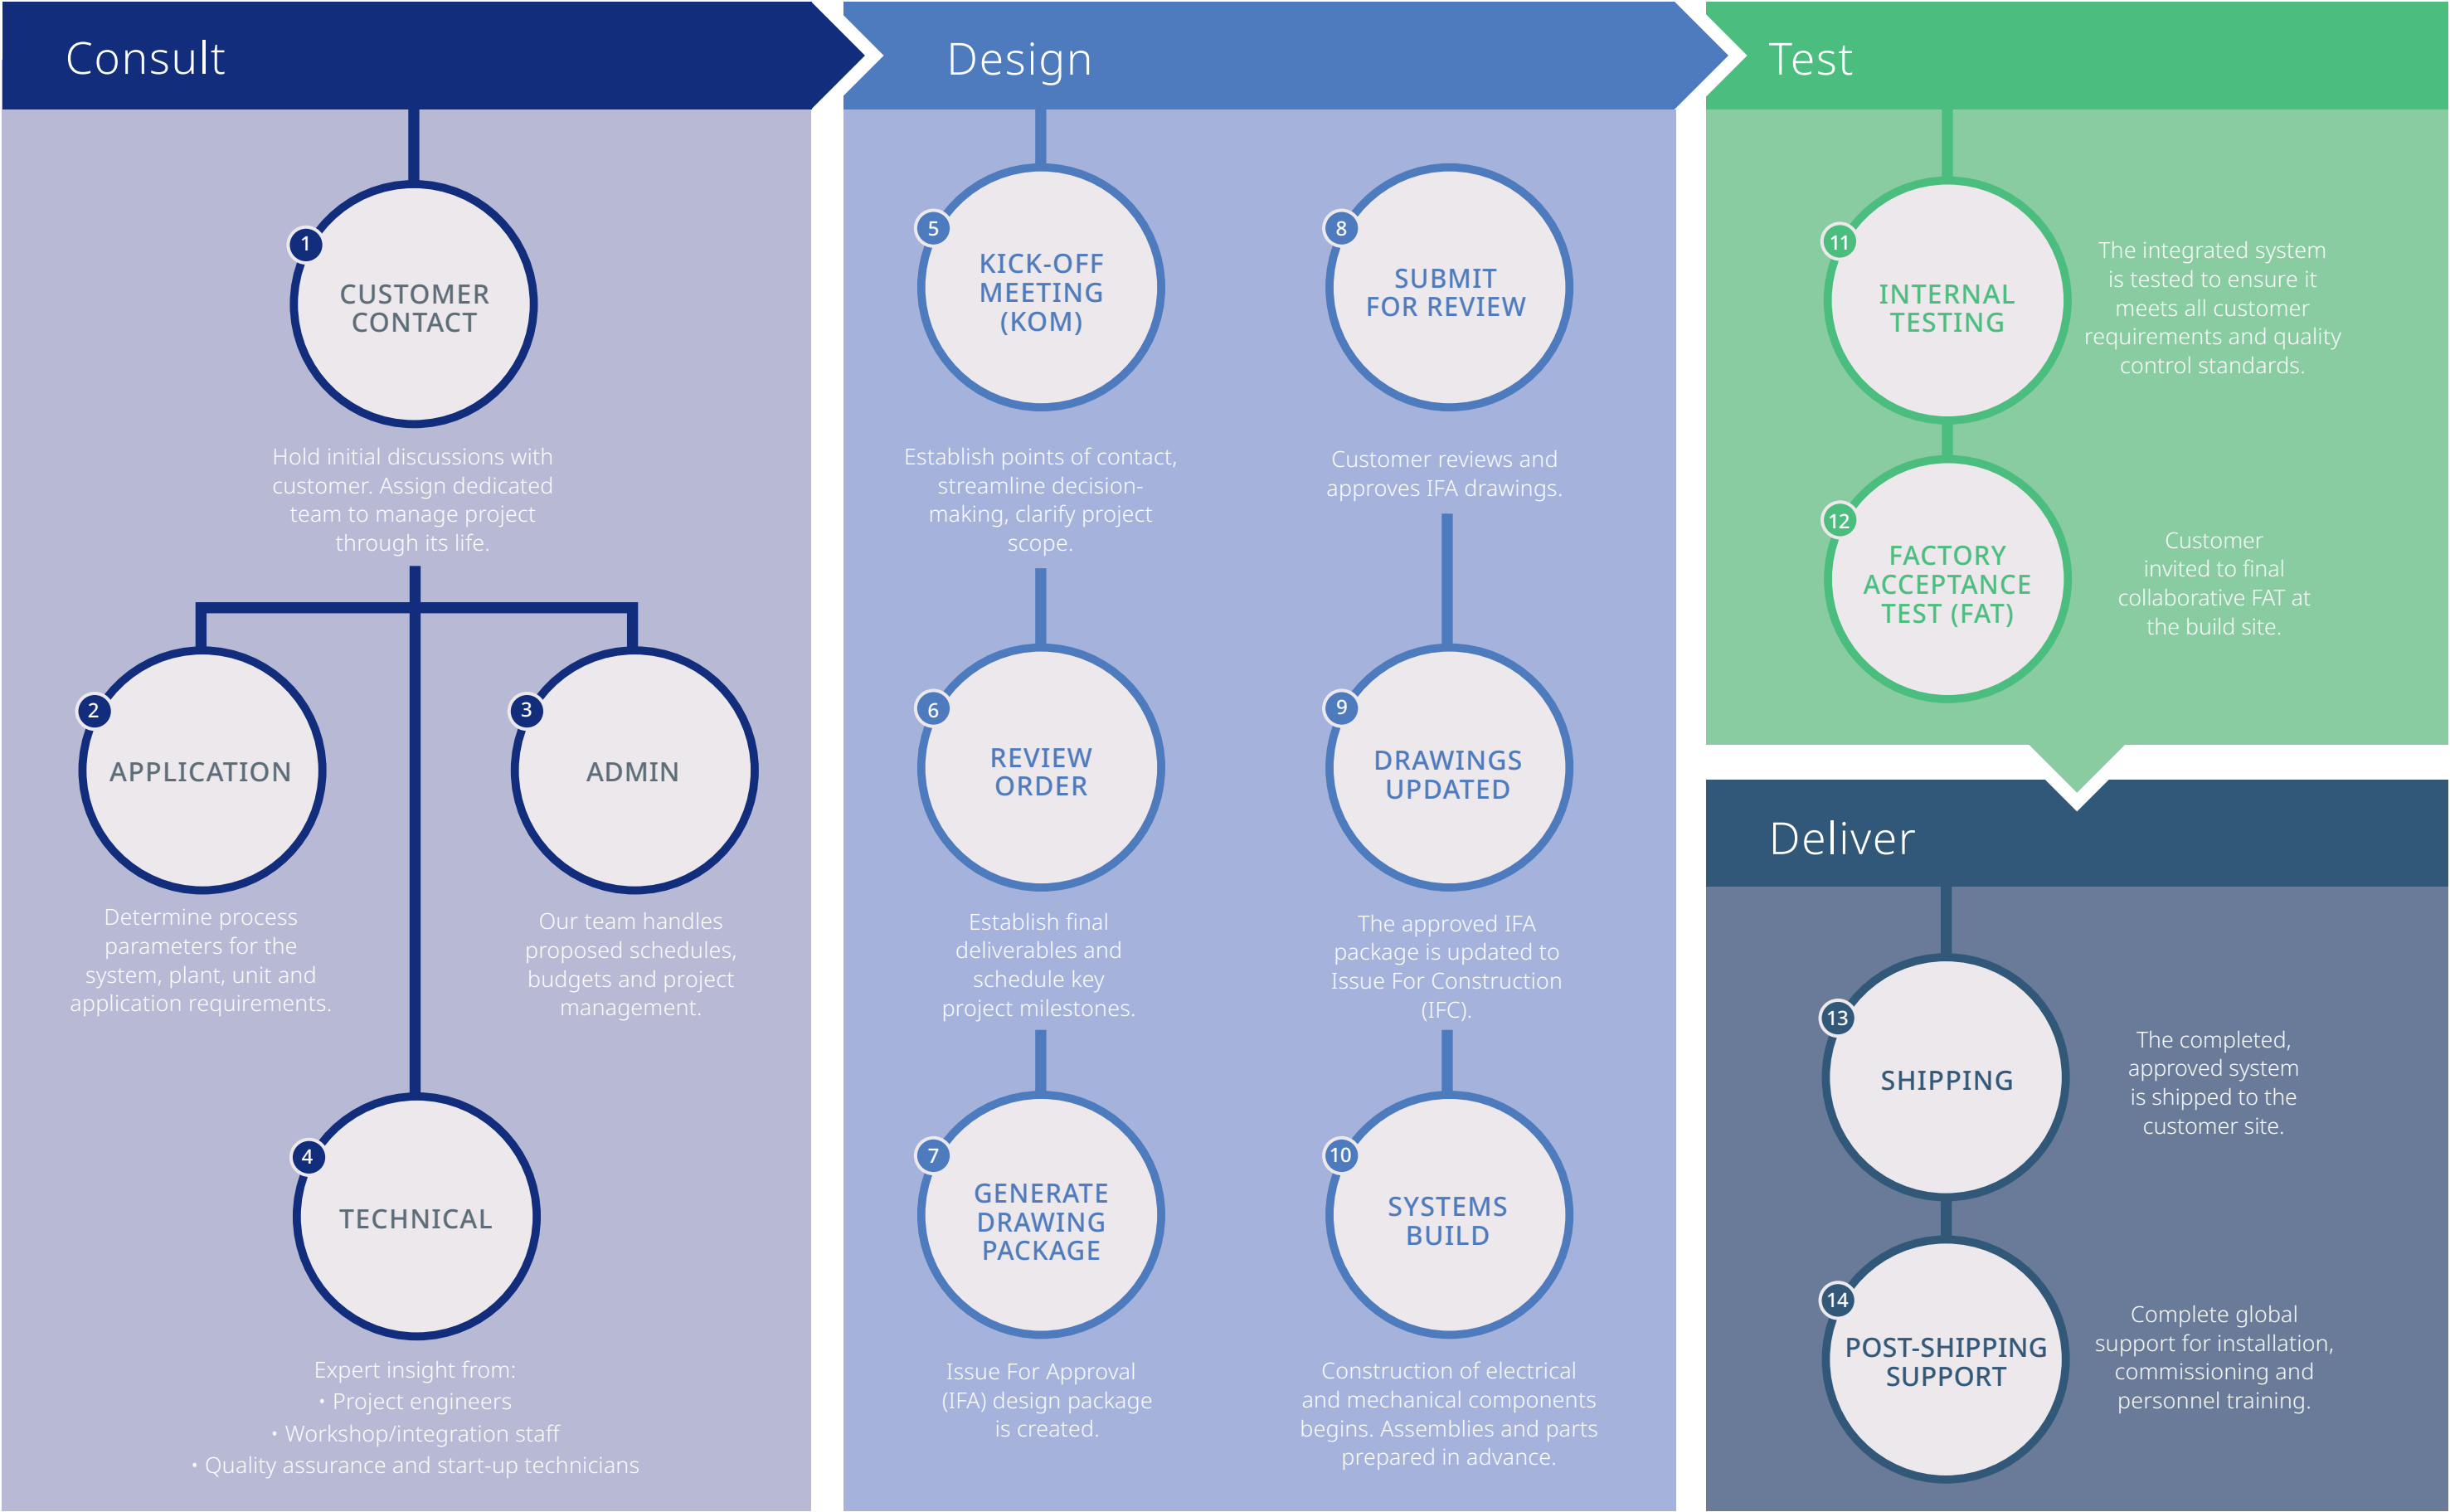

Global expertise delivered locally

Service plays an essential role in Servomex's gas analysis expertise. Our analyzer systems are designed to meet the precise process requirements of every customer, and the same is true of our service support.

We supply an extensive range of service products, backed by deep applications knowledge, that support the optimum performance of our analyzers and systems.

Our global network of engineers delivers the expertise your product needs, wherever it's needed.

We believe that service should cover the entire life of your analyzer. That's why our experts can be present from day one, commissioning, setting up, and calibrating your new instrument for optimum performance.

Commissioning gives your analyzer the best start, while a planned maintenance schedule helps to ensure that it continues to operate efficiently and accurately throughout its life cycle. We also provide easy access to the spares you need, with rapid dispatch and expert advice on what to keep stocked, for minimal downtime.

Servomex operates regional service centres around the world – including our latest facility in Korea – allowing our experienced engineers to provide a rapid response, covering all maintenance needs from routine servicing to emergency repairs or replacement.

We can also deliver training for your staff to ensure you get the most from your gas analyzer, and provide remote support options when expert help is required.

You can find out more about our service products, and how they support your analyzers, in the new edition of our Service Product Guide.

It's a comprehensive guide to keeping your process running at top performance, including recommended service options for each of our analyzers.

See how the Servomex Service Network can be tailored to your unique needs, and get in touch with our team if you want to learn more.

Find out more about our customized service support at servomex.com/service

Wherever you are, we're ready to help, with remote or on-site support overseen by our regional leaders:


- 
- Houston
 - Boston
 - UK
 - Netherlands
 - Singapore
 - China
 - South Korea

Meet the team online

Servomex Service Network

Our global network of expert engineers delivers the support your product needs throughout its life, including:

- Customized service products to support optimum analyzer performance
- Full maintenance coverage from routine servicing to emergency repairs
- Rapid, easy-access spares support to help ensure minimal downtime

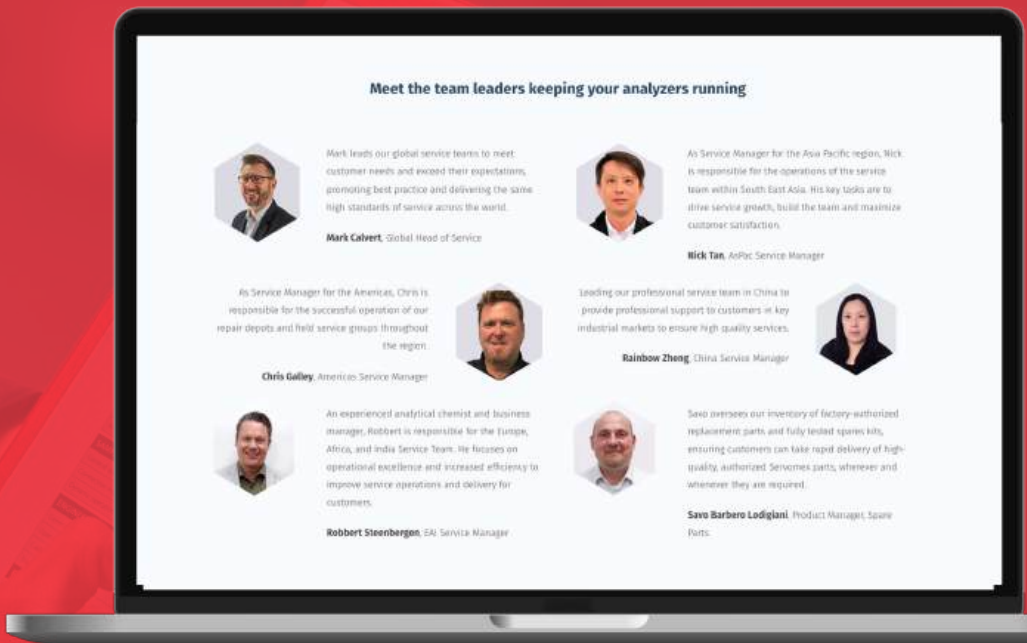

Want to view our products online? visit servomex.com

Get in touch to learn more: servomex.com/service

Our service product range

Find out more at: servomex.com/service

Whatever your service needs, Servomex Service Network has the solution. Through our network of mobile engineers and service centres, we deliver Servomex expertise directly to your plant.

Uptime+ Service Plans

Complete support for your analyzer

Based upon the modular service contracts, an Uptime+ Service Plan delivers benefits from start-up to decommissioning, supported by our expert team.

We help ensure optimum performance for the entire product lifecycle, enabling you to safeguard your process and empowering you to overcome the application challenges you face, while relying on Servomex expertise.

Our experts consult with you to determine what you need to meet your goals, and use that information to recommend a tailor-made support package based on the specific demands of your applications.



Features and benefits

- A start-to-finish customized service to match your process
- Enhanced productivity
- Peace of mind with Servomex experts taking care of your measurements

Uptime+ Service Contracts

Increased uptime and peace of mind

Supporting your process needs from basic to complex operations, an Uptime+ Service Contract delivers maximized uptime and performance across the active lifespan of your analytical system.

With three levels of support, each service delivers the essential benefits you need for your process. It puts your process needs first, empowering you to overcome the application challenges you face and helping to ensure you can achieve your targets.

Our expert team helps you define your requirements, then guides you to select the service and level of support you need, ensuring you only pay for what you need.



Features and benefits

- A modular service solution
- Reduced downtime
- Maintain optimum measurement accuracy
- Keep your key assets up to date

Factory Acceptance Testing

Ensure your system meets specifications

For maximum peace of mind, a Factory Acceptance Test (FAT) ensures your gas analysis system will arrive ready to operate according to your exact specifications.

Performed at one of our regional service centres, in collaboration with your own staff, the FAT is an extensive testing process that allows any issues to be identified and corrected prior to shipping to your site.

Designed to cover system builds, it is also beneficial for large-scale analyzer projects. A successful FAT means that when the system arrives on your site, it can be installed and ready to operate quickly.



Features and benefits

- The system performance you're expecting
- Ready to deliver the results you need from day one
- A chance to resolve unforeseen issues
- Opportunity to consult with our expert systems team

Training

Sharing our gas analysis expertise

Providing your on-site user and maintenance teams with full training on the relevant analyzers supports long-term reliability and maximum performance.

Our customized training programs ensure teams can get the most from their equipment. They range from basic user training through to providing an advanced understanding of the measurement technology used, or diagnostic and maintenance capabilities.

Courses are run by experienced, highly qualified specialists, who review specific requirements to create a program that combines classroom and hands-on workshops at the customer's preferred location.



Features and benefits

- In-depth systems training
- Covers all key Servomex analyzers
- Presented by Servomex experts
- Given at our global training centres or on-site

Commissioning

Optimum performance from the outset

Correctly installing and configuring your gas analyzer ensures it delivers the expected performance from day one, meeting safety, compliance, and operational needs. Commissioning makes certain that systems and components are designed, installed, tested, operated, and maintained according to requirements.

Our highly trained team provides a fast, seamless, and comprehensive commissioning service that delivers optimum performance and peace of mind.

Servomex commissioning ensures the analyzer meets process requirements, avoiding the dangers of compromised plant safety, and qualifies the analyzer for an additional six-month warranty period.



Features and benefits

- Fast, seamless commissioning service
- Trained Servomex engineers
- Ensures optimum performance
- Qualifies analyzers for six months additional warranty

Spares

Maintain your process uptime

Access to the right spare parts and consumables at the right time is critical to maintaining plant operations and safeguarding productivity.

With our global sales and distribution network, Servomex can supply high-quality, authorized parts wherever and whenever you need them. Every Servomex spare part is precision-made to the highest specifications, with a no-compromise approach to quality.

Comprehensive factory-authorized spares packages are available for our analyzers, each customized to exact requirements, with all the parts needed for quick and easy component replacement. Our global team is on hand to assist in selecting the right part for your analyzer, further reducing downtime.



Features and benefits

- Factory-authorized replacement parts
- Fully tested spares kits
- Ready for fast shipping
- Recommended reserve packs available

Our service product range

Find out more at: servomex.com/service

On-site Service Support

Our expertise delivered direct to you

From urgent assistance with an emergency to scheduled maintenance visits, on-site service support from our expert team helps keep plants and processes running efficiently.

Our service engineers are the heart of the Servomex Service Network, and are based around the globe to deliver rapid support for any plant's on-site analyzer and system requirements.

These skilled product specialists are fully qualified and equipped with the necessary spares for all servicing requirements, from commissioning to maintenance and repair. On-site support means that even when plants are run remotely or with minimal staff, the gas analyzers remain supported, for complete peace of mind.



Features and benefits

- Skilled product specialists
- Highly experienced experts
- Covers all operational and maintenance needs
- Locally based for fast response

Service Centre Support

Expert support close to your plant

Developing proactive maintenance programs will sustain the life of your analyzer, preventing risk of failures.

However, when problems do occur, it is essential to get the analyzer up and running again as quickly as possible.

That's why we operate a global network of state-of-the-art service centres, located close to customers and ready to receive analyzers for repair, preventative maintenance, and upgrades.

A dedicated in-house co-ordination team works closely with our experienced repair engineers to provide a streamlined, hassle-free service at each centre. They co-ordinate with local couriers to ensure the fastest possible turnaround and minimal process downtime.



Features and benefits

- Full range of services
- Regional support
- Cost-effective repairs, no compromise in quality
- Dedicated in-house team

Rentals

Continued measurement availability

Servomex analyzers are available for hire, whenever you need them. Source a temporary replacement analyzer for your system quickly, with complete confidence that it will operate correctly and integrate easily.

Short and long-term agreements can be made, ensuring businesses receive the latest product technology, maintained to the highest standards and upgraded to the latest specifications.

If the efficiency, quality, and safety of your process depend on a Servomex analyzer but that device needs servicing or repairs, a rental agreement is a valuable solution. It ensures a like-for-like replacement, configured to your specifications, that keeps your process running with minimal disruption.



- A full range of analyzers to meet your requirements
- Equipment maintained to specification
- Expertise on hand to assist
- Fast delivery

Health Check

Ensure optimum analyzer performance

Keeping on top of the operational efficiency of your analyzer can be difficult and time-consuming. An expert engineer will carry out a thorough evaluation and review of your plant's analyzers and sample system.

Carried out on-site, this provides unmatched protection for your investment in gas analysis systems, and verifies that the instrument is performing within specifications. Operators can then be confident that measurements are accurate and the quality of results is not compromised.

A health check allows for a more proactive approach to analyzer maintenance, detecting performance anomalies before they become costly problems, and avoiding downtime caused by unscheduled repairs.



Features and benefits

- Quality assurance of instrument performance
- Increased reliability and trustworthy results
- Expert maintenance plans
- Avoids unscheduled repairs

Contact our service team today: servomex.com/contact/service

Recommended service chart

SERVOTOUGH	Uptime+ Service Plan	Factory Acceptance Testing	Commissioning	Training	Spares
Oxy 1900					
OxyExact 2200					
SpectraExact 2500					
FluegasExact 2700					
Laser 3 Plus Range					

SERVOPRO	Uptime+ Service Plan	Factory Acceptance Testing	Commissioning	Training	Spares
AquaXact 1688					
MonoExact DF150E					
MonoExact DF310E					
MultiExact 4100					
MultiExact 4200					
4900 Multigas					
Plasma					
FID					
Chroma					
NanoChrome					
DF-500 Range					
DF-700 Range					
NanoChrome ULTRA					
NanoTrace DF-560E ULTRA					
NanoTrace DF-750 ULTRA					
NanoTrace DF-760E ULTRA					

SERVOFLEX	Uptime+ Service Plan	Factory Acceptance Testing	Commissioning	Training	Spares
Micro i.s. 5100					
MiniMP 5200					
MiniHD 5200					

Want to view our services online?

This table outlines our suggested service support for each of our products. However, all our service products are available for every Servomex analyzer and system – contact your nearest service centre to learn more.

Uptime+ Service Contract	On-site Service Support	Service Centre Support	Rentals	Health Check	PAGE
					103
					104
					105
					107
					108

Uptime+ Service Contract	On-site Service Support	Service Centre Support	Rentals	Health Check	PAGE
					112
					113
					114
					115
					116
					117
					118
					119
					120
					121
					122
					123
					124
					125
					126
					127

Uptime+ Service Contract	On-site Service Support	Service Centre Support	Rentals	Health Check	PAGE
					129
					130
					131

Visit servomex.com/service

Get the resources you need to support your process solution

Stay informed with our expert solutions magazines

Available in downloadable and interactive versions, our Expert Solutions (ES) magazines cover a wide variety of topics, ranging from new product launches to complete process solutions. The publications also cover key markets, sensing technologies, and expert applications advice. Our annual Product Guide is also available, highlighting all our available gas analysis solutions.

EXPERT PAPERS

For an in-depth look at our gas analyzers and the technologies they use, download our expert papers. Written by our knowledgeable team, they examine how our sensing technologies work and explain why certain products deliver the best solution for key applications.



PRODUCT BROCHURES

For the best available information about our products, you'll want to read our product brochures. They outline how the analyzer works and which applications it's best suited to. It also explains the main features and their benefits, and lists all the certifications it has.




MANUALS

Whether you need to replace a lost product manual, need a quick online reference, or just want to see how the product works before you order, we've got you covered. All our existing product instruction manuals are available to download, for quickstart, installation, operation and certification.



VIDEOS

Our extensive array of videos are ready to view on our website now. Some focus on our products, including expert 'unboxings'. Others look at applications and how our products deliver the solutions you need. We also feature our experts discussing key areas of gas analysis, and how Servomex can help customers in a range of markets.

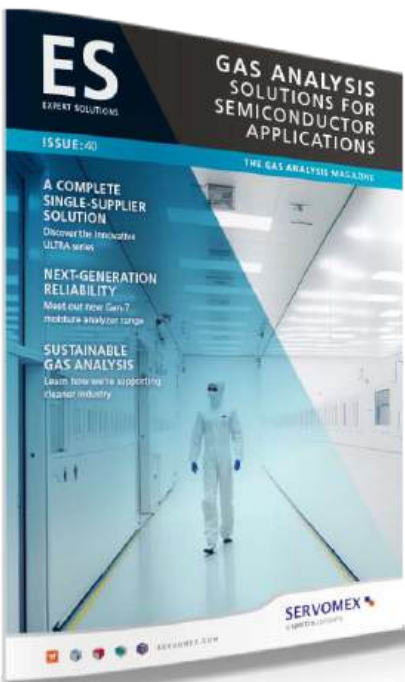

To access these resources go to: servomex.com/resources

Sign up to Servomex news

Get the **latest alerts**
about Servomex
systems and products.

1. SCAN THE QR CODE

Get the latest
information directly
on your phone or
smart device by
scanning the
QR code.



2. VISIT >>>

servomex.com/signup

When you sign up to receive Servomex
emails, you'll be the first to know about
our new products. Take control of your
preferences and make sure you get all the
news that's relevant to you.



2470900
Carbon Captured Material

Analysis that **empowers**

SERVOMEX 
a **spectris** company